

Bacharach® Insight® Plus Combustion Analyzer

For Residential and Commercial Applications



DESCRIPTION

The MSA Bacharach® Insight® Plus is the ideal combustion analyzer for both entry-level and experienced residential or commercial HVAC technicians providing readings for O₂, CO, CO₂, Combustion Efficiency, Temperature, & Draft. Bacharach's exclusive Tune-Rite™ software allows for fast and simple combustion analysis and troubleshooting to ensure safe operating conditions and determine combustion efficiency. The Insight® Plus is available with precalibrated, Sensor Exchange Program gas sensors to minimize downtime and maintenance costs. The Combustion mobile app (available for Android & iOS) allows users to create and send customizable combustion reports on-site.

Features

Readings for O₂, CO, CO₂, Combustion Efficiency, Temperature, & Draft

Industry-exclusive Tune-Rite On-demand HVAC Assistant

Combustion App

Long Life O₂ Sensor
(3 Year Warranty)

Automatic Sensor Protection

IR Printer with magnet

Ambient CO Monitor

Benefits

All-in-one tool making combustion tuning fast and simple

Analyzes combustion data and provides real-time troubleshooting suggestions


Quickly create custom reports with comments and send via email (available for Android & iOS).

Reduced maintenance cost and downtime

Protects sensors in the toughest combustion environments, extending life

Print combustion and emissions reports in the field

Check for dangerous levels of ambient CO

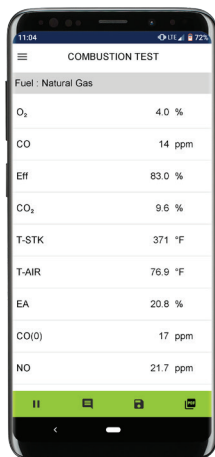

Generate Custom
Reports with the
Combustion App



MORE INFORMATION:

Scan the QR code to learn about the Insight® Plus and other MSA Bacharach products.

SAFEGUARDING
PEOPLE, PLACES, AND PLANET

1.800.561.8187

www.itm.com

information@itm.com

Bacharach® Insight® Plus Combustion Analyzer



Specifications	Description
O ₂	20.9%
CO (W/ INTEGRATED NOX FILTER)	0 to 4,000 ppm
STACK TEMPERATURE	-4 to 1,202°F (-20 to 650°C)
AMBIENT TEMPERATURE	-4 to 600°F (-20 to 316°C)
DRAFT / DIFFERENTIAL PRESSURE	±40 inH ₂ O (±10 mbar)
FUELS	Natural Gas, Coal, Oil 2/4/6, Wood, Kerosene, Propane, Butane, LPG, B5, KOKS, LEG, Biofuel and two optional custom fuels

Product Details	Description
DISPLAY	2.8" (72 mm) backlit, color LCD
DISPLAY LANGUAGES	English, Spanish, French
POWER	4 × AA Disposable Alkaline Batteries ≈ 15 hours
SIZE (H × W × D)	8.0" × 3.6" × 2.3" (20.3 × 9.1 × 5.8 cm)
WEIGHT	1 lb. (0.45 kg) including batteries
MEMORY	100 records
COMMUNICATIONS	USB 2.0 (mini-B), IrDA
APPROVALS	CE, EN 50379-1 & -3
WARRANTY	2 years (including sensors) 3 years for long-life O ₂ sensor, if equipped

Part Number	Description
0024-8517	Fyrite® Insight® Plus (analyzer, 12" probe, 6" sample hose assembly, 3 × particulate filters, protective rubber boot and rugged protective carrying case)
0024-8518	Fyrite® Insight® Plus & Reporting Kit (IrDA wireless printer, USB cable and Fyrite® User Software)

* Sievert configurations available.