


Three-Phase Current Transformers

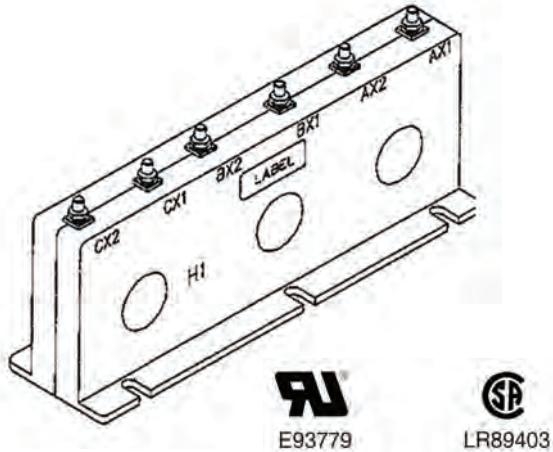

Dimensions

Frequency: 50-400 Hz

Insulation Level: 0.6kV

Weight: Approximately 1.75 lbs.

Width: 7.13"

Height: 3.22"

Length: 2.22"

- Use with GIMA Series Meters
- Reduce high AC current signals

Ordering Information

Catalog Number	Current Ratio	Accuracy @ 60 Hz	Burden VA 60 Hz
37026	50:5	± 3%	2.0
37027	100:5	± 2%	2.0
37028	150:5	± 1%	4.0
37029	200:5	± 1%	5.0
37030	300:5	± 1%	10.0

Hardware Required:

(6) 1/4" Washers

(6) 1/4" Bolts and Nuts

Hardware not furnished with the Current Transformer

