
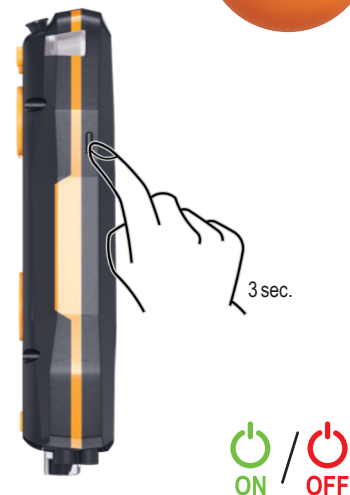


2

4

5

6

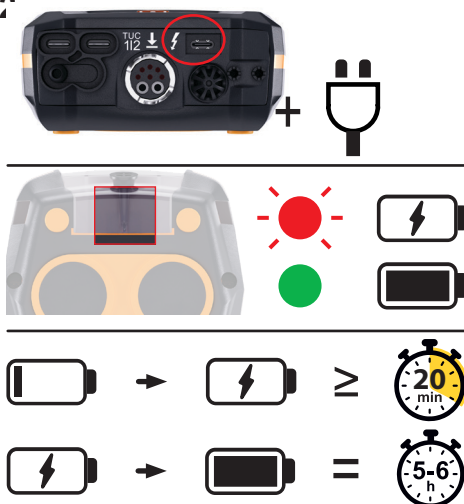

															
227 x 47 x 102 mm 8.94 x 1.85 x 4.01 in 	-5 ... +45 °C +23 ... +113 °F  -20 ... +50 °C -4 ... +122 °F 	0 ... +35 °C +32 ... +95 °F  10 h	 [?] CO [?] CO-H₂ [?] NO	-40 ... +1200 °C -40 ... 2192 °F O₂ = 0 ... 21 Vol. % <table><tr><td></td><td>testo 320</td><td>testo 330</td></tr><tr><td>CO</td><td>0 ... 5000 ppm</td><td>0 ... 20000 ppm</td></tr><tr><td>CO H₂</td><td>0 ... 10000 ppm</td><td>0 ... 40000 ppm</td></tr></table>  -9,99 ... +40 hPa -4.00 ... +16 lnH₂O  -100 ... +200 hPa -40 ... +80 lnH₂O		testo 320	testo 330	CO	0 ... 5000 ppm	0 ... 20000 ppm	CO H ₂	0 ... 10000 ppm	0 ... 40000 ppm	ca. 685 g ca. 24 oz	IP40
	testo 320	testo 330													
CO	0 ... 5000 ppm	0 ... 20000 ppm													
CO H ₂	0 ... 10000 ppm	0 ... 40000 ppm													

Approval and Certification

Product	testo 320 testo 330
Model	MN-01-0330-01
Order No.	0633 3200 xx 0633 3300 xx "xx" defines the country and sensor version
Date	2026-08-06

The use of the wireless module is subject to the regulations and stipulations of the respective country of use, and the module may only be used in countries for which a country certification has been granted. The user and every owner has the obligation to adhere to these regulations and prerequisites for use, and acknowledges that the re-sale, export, import etc. in particular in countries without wireless permits, is his responsibility.

Country	Comments														
Canada	Contains IC: 6127B-04602710 See IC Warnings														
Europa + EFTA	  Hereby, Testo SE & Co. KGaA declares that the radio equipment types testo 320 and testo 330 (Model MN-01-0330-01) are in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: EU countries: Belgium (BE), Bulgaria (BG), Denmark (DK), Germany (DE), Estonia (EE), Finland (FI), France (FR), Greece (GR), Croatia (HR), Ireland (IE), Italy (IT), Latvia (LV), Lithuania (LT), Luxembourg (LU), Malta (MT), Netherlands (NL), Austria (AT), Poland (PL), Portugal (PT), Romania (RO), Sweden (SE), Slovakia (SK), Slovenia (SI), Spain (ES), Czech Republic (CZ), Hungary (HU), Republic of Cyprus (CY). EFTA countries: Iceland, Liechtenstein, Norway, Switzerland  WEEE Reg. no. DE 75334352 														
United Kingdom (GB)	  The UK Declaration of Conformity can be found on the testo homepage under the product specific downloads.														
USA	 contains FCC ID: WAF-04602710 See FCC Compliance Statement														
WLAN information	<table><tr><th>Feature</th><th>Values</th></tr><tr><td>WLAN range</td><td>Up to 100 m (325 feet) (free field)</td></tr><tr><td>Radio type</td><td>WLAN 2.4 GHz WLAN 5 GHz (U-NII-1)</td></tr><tr><td>Company / Model</td><td>Testo SE & Co. KGaA / CON007 0460 2710</td></tr><tr><td>WLAN radio class</td><td>Accord with the standard of IEEE 802.11 a/b/g/n/ac/ax</td></tr><tr><td>RF Band</td><td>2412 – 2472 MHz 5150 – 5250 MHz</td></tr><tr><td>Power output</td><td>≤ 19.3 dBm @ 2.4 GHz ≤ 21.1 dBm @ 5 GHz</td></tr></table>	Feature	Values	WLAN range	Up to 100 m (325 feet) (free field)	Radio type	WLAN 2.4 GHz WLAN 5 GHz (U-NII-1)	Company / Model	Testo SE & Co. KGaA / CON007 0460 2710	WLAN radio class	Accord with the standard of IEEE 802.11 a/b/g/n/ac/ax	RF Band	2412 – 2472 MHz 5150 – 5250 MHz	Power output	≤ 19.3 dBm @ 2.4 GHz ≤ 21.1 dBm @ 5 GHz
Feature	Values														
WLAN range	Up to 100 m (325 feet) (free field)														
Radio type	WLAN 2.4 GHz WLAN 5 GHz (U-NII-1)														
Company / Model	Testo SE & Co. KGaA / CON007 0460 2710														
WLAN radio class	Accord with the standard of IEEE 802.11 a/b/g/n/ac/ax														
RF Band	2412 – 2472 MHz 5150 – 5250 MHz														
Power output	≤ 19.3 dBm @ 2.4 GHz ≤ 21.1 dBm @ 5 GHz														
Bluetooth® information	<table><tr><th>Feature</th><th>Values</th></tr><tr><td>Bluetooth® range</td><td>Up to 100 m (325 feet) (free field)</td></tr><tr><td>Radio type</td><td>Bluetooth® Low Energy (BLE)</td></tr><tr><td>Company / Model</td><td>Testo SE & Co. KGaA / CON007 0460 2710</td></tr><tr><td>RF Band</td><td>2402 – 2480 MHz</td></tr><tr><td>Power output</td><td>≤ 9.2 dBm</td></tr></table>	Feature	Values	Bluetooth® range	Up to 100 m (325 feet) (free field)	Radio type	Bluetooth® Low Energy (BLE)	Company / Model	Testo SE & Co. KGaA / CON007 0460 2710	RF Band	2402 – 2480 MHz	Power output	≤ 9.2 dBm		
Feature	Values														
Bluetooth® range	Up to 100 m (325 feet) (free field)														
Radio type	Bluetooth® Low Energy (BLE)														
Company / Model	Testo SE & Co. KGaA / CON007 0460 2710														
RF Band	2402 – 2480 MHz														
Power output	≤ 9.2 dBm														
Bluetooth® SIG Listing	<table><tr><td>DN</td><td>Q393999</td></tr><tr><td>Member company</td><td>Testo SE & Co. KGaA</td></tr></table>	DN	Q393999	Member company	Testo SE & Co. KGaA										
DN	Q393999														
Member company	Testo SE & Co. KGaA														
TÜV	TÜV by RgG 329 TÜV approved: EN 50379-1, -2, -3 / VDI4206-1 °C, O2, CO2, CO, NO, ΔP														
	Comments														
Hongkong	Authorized														

IC Warnings

CAN ICES-003(B)/NMB-003(B):
This Class B digital apparatus complies with Canadian ICES-003.
Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

RSS-Gen & RSS-247 statement:
This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s).

Operation is subject to the following two conditions:
(1) this device may not cause interference, and
(2) this device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :
(1) l'appareil ne doit pas produire de brouillage, et
(2) l'utilisateur de l'appareil doit accepter tout brouillage radio-électrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Caution: Radio Frequency Radiation Exposure
This device meets the government's requirements for exposure to radio waves.

This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Innovation, Science and Economic Development Canada (ISED)

The exposure standard for wireless device employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the IC is 1.6 W/kg. Tests for SAR are conducted using standard operating positions (5mm) accepted by the IC with the device transmitting at its highest certified power level in all tested frequency bands.

Co-Location:
This device must not be co-located or operated in conjunction with any other antenna or transmitter.

Attention :
Cet appareil répond aux exigences du gouvernement en matière d'exposition aux ondes radio.

Cet appareil est conçu et fabriqué pour ne pas dépasser les limites d'émissions d'exposition à l'énergie des radiofréquences (RF) établies par Innovation, sciences et développement économique Canada (ISED)

La norme d'exposition pour les appareils sans fil utilise une unité de mesure connue sous le nom de débit d'absorption spécifique, ou das. La limite de das établie par le ci est de 1.6 W/kg. Les essais de das sont effectués en utilisant des positions de fonctionnement standard (5mm) acceptées par le ci, le dispositif émettant à son niveau de puissance certifié le plus élevé dans toutes les bandes de fréquence testées.

Co-location
Ce dispositif ne doit pas être utilisé à proximité d'une autre antenne ou d'un autre émetteur.

CE warnings

The SAR limit of Europe is 2.0 W/kg. This device has also been tested against this SAR limit. To maintain compliance with RF exposure requirements, it should keep a 5 mm separation distance between the user's body and the device.

FCC Warnings

Information from the FCC (Federal Communications Commission)

For your own safety
Shielded cables should be used for a composite interface. This is to ensure continued protection against radio frequency interference.

FCC warning statement
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures::

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Shielded interface cable must be used in order to comply with the emission limits.

Warning
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: Radio Frequency Radiation Exposure
This device meets the government's requirements for exposure to radio waves.

This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government.

The exposure standard for wireless device employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6W/kg. Tests for SAR are conducted using standard operating positions (5mm) accepted by the FCC with the device transmitting at its highest certified power level in all tested frequency bands.

Co-Location:
This device must not be co-located or operated in conjunction with any other antenna or transmitter.

Manufacturer

Testo SE & Co. KGaA

Warning: Please follow the instructions when using the product.