



MSO1000HD Series

High-Resolution Oscilloscopes

Data Sheet

V1.0

Jan. 2025

Product Introduction

MSO1000HD series high-resolution oscilloscope has the maximum bandwidth of 250 MHz, the maximum sampling rate of 2.5 GSa/s, and is equipped with 4 analog channels and 16 digital channels, with the storage depth of up to 100 Mpts. MSO1000HD series adopts exclusive Ultra Phosphor 3.0 technology, achieving the waveform capture rate of up to 200,000 wfms/s, with 256 levels of gray temperature colors, and features an innovative digital trigger system with high trigger sensitivity and low jitter.


This oscilloscope supports multiple advanced triggers, serial bus triggering and decoding, and offers advanced sampling and analysis modes such as spectrum analysis, power analysis, histogram, waveform recording, enhanced resolution (ERES), hardware-accelerated template testing, and search and navigation. Additionally, this oscilloscope provides multiple measurements and mathematical operations.

MSO1000HD series features a 7-inch capacitive touch screen that supports multiple gestures for common waveform operations. Combined with multiple one-touch keys on the front panel, this greatly optimizes the efficiency of oscilloscope operation and improves the user experience.



Mainstream Touchscreen Design Providing Intelligent Interactive Experience

Featuring a 7-inch HD capacitive multi-touch screen, it supports a variety of gesture operations such as touch, drag, zoom and rectangle drawing. This makes operation more convenient and smoother, and helps the user learn the instrument more easily. It retains the traditional key and knob operation while also supporting mouse and keyboard, making instrument operation more versatile and greatly improving the interactive experience.

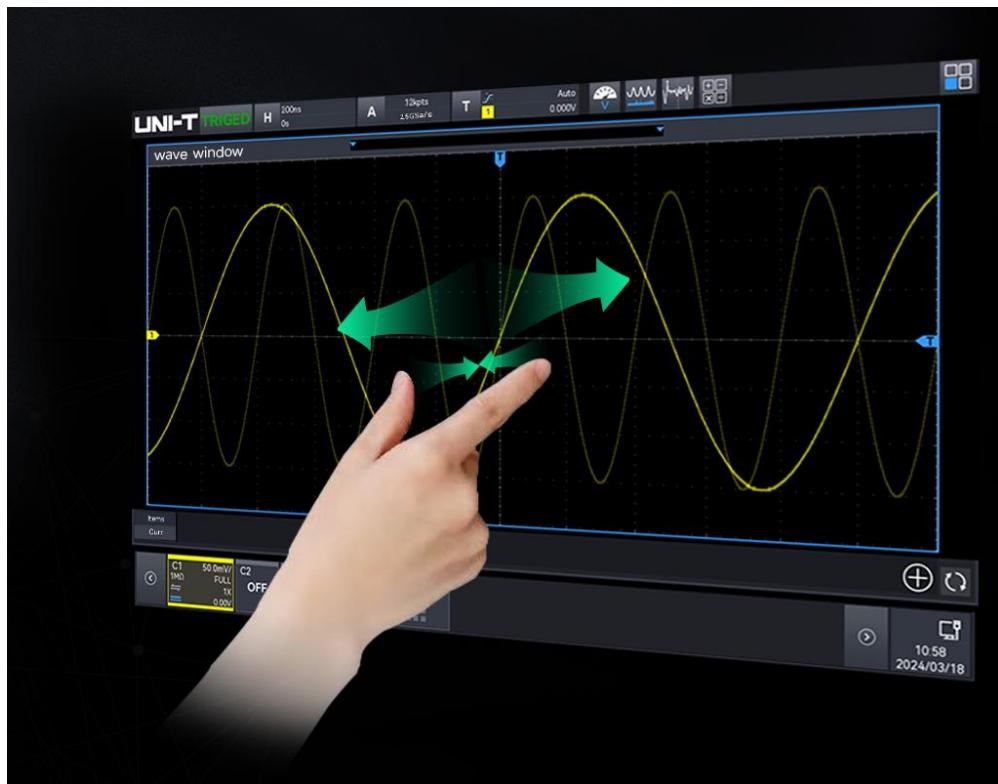

Brand New Appearance Design

MSO1000HD series features an innovative appearance with a double-sided thinning design. The display is aligned horizontally with the panel to enhance touch operation and visibility range. The black frame margin, combined with the metal grey and black body, enhances the overall sense of the instrument.



Features and Advantages


- Analog channel bandwidth: 250 MHz/150 MHz
- Real-time sampling rate of the analog channel is up to 2.5 GSa/s. The maximum sampling rate of the digital channel is 1.25 GSa/s.
- 12-bit vertical resolution, with up to 4096 points, ensures that the waveform details are clearly visible.
- 4 analog channels, 16 digital channels, and the storage depth of up to 100 Mpts
- The maximum waveform capture rate is up to 200,000 wfms/s (sequence mode: 1,000,000 wfms/s)
- 9 instrument functions: Digital oscilloscope, logic analyzer, function/arbitrary waveform generator, spectrum analyzer, digital voltmeter, frequency meter, protocol analyzer, bode plot analyzer, and power analyzer.
- Built-in 25 MHz equivalent performance single-channel function/arbitrary waveform generator, supporting load the oscilloscope's on-screen data to Gen arbitrary waveform output in real time, and offering compatibility with multiple built-in arbitrary waveforms.
- Bode plot loop test analysis function designed to analyze the system stability.
- Parameter measurement adds Bar Chart and line graph display
- Uninterrupted hardware real-time waveform recording and analysis of up to 100,000 frames and supports USB memory export function.
- Enhanced FFT of up to 1M points, supporting the spectrum analyzer functions such as frequency setting, waterfall curve, detection setting, and marker.
- Supports ERES (enhanced resolution) of up to 4-bit
- 56 kinds of parameter measurements
- Multi-Windows display
- Multi-channel 7-digit hardware frequency meter, supporting frequency refresh time and adjustable effective digit settings.
- DVM multi-channel RMS measurement: DC, AC RMS, and DC+ACRMS
- Multiple trigger types: Edge, pulse width, video, ramp, runt pulse, over-amplitude pulse, delay, timeout, duration, setup & hold, Nth edge and, code pattern
- Protocol triggering and decoding function: RS232/UART, I²C, SPI, CAN, CAN-FD, LIN, Audio
- Zone trigger for capturing sporadic signals and observing complicated signals.
- Ultra Phosphor3.0 provides a super fluorescent display effect with up to 256 levels of gray.
- 7-inch 1280x800 HD capacitive multi-touch screen, supporting gesture control such as click,

- slide, zoom, edit, and drag
- Multiple peripheral interfaces: USB Host, USB Device, LAN, AUX Out (Trig Out, Pass/Fail, DVM), Gen Out, HDMI
- Supports SCPI (Standard Command for Programmable Instrument)
- Built-in WebServer for accessing and controlling the instrument through a browser, supporting access from PC and mobile devices for cross-platform compatibility.
- Supports on-line update

Design Features


High-resolution

12-bit high-resolution ADC sampling has a quantization level of up to 4096, which is 16 times that of a traditional 8-bit ADC, allowing for better restoration of waveform details.

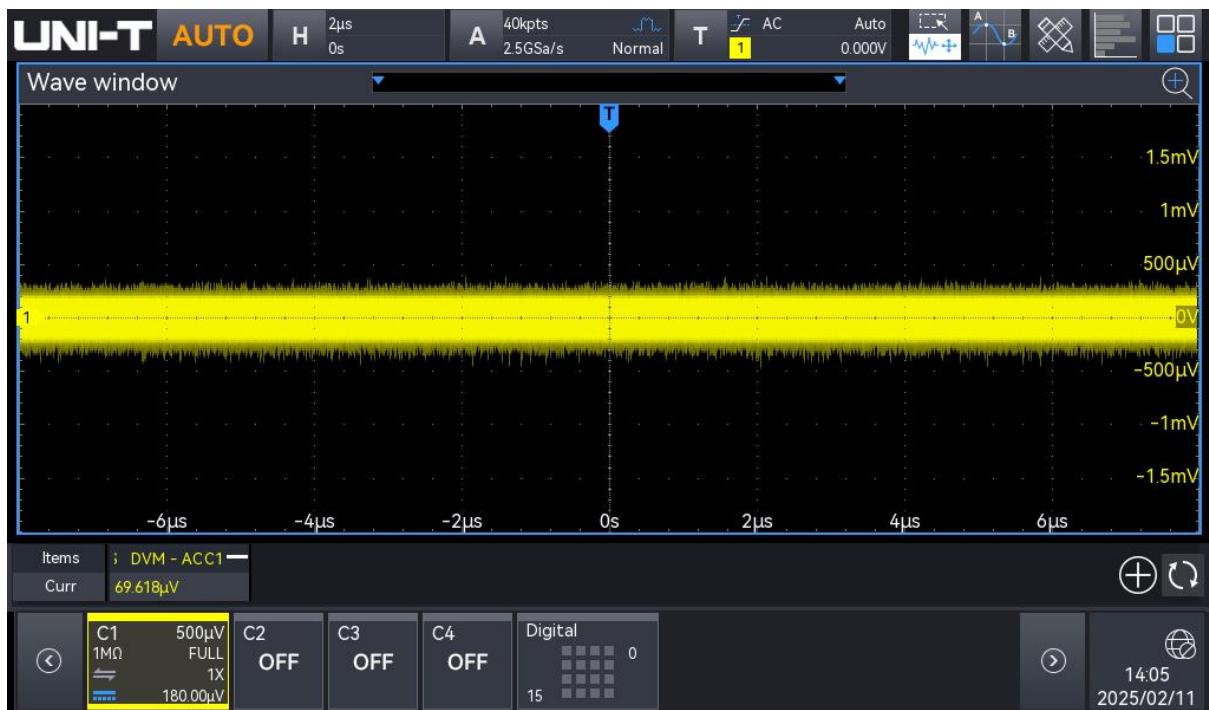

The excellent background noise, which is only 75 μ Vrms at the full bandwidth of 250 MHz, allows the 12-bit ADC to perform optimally.

Application Scope

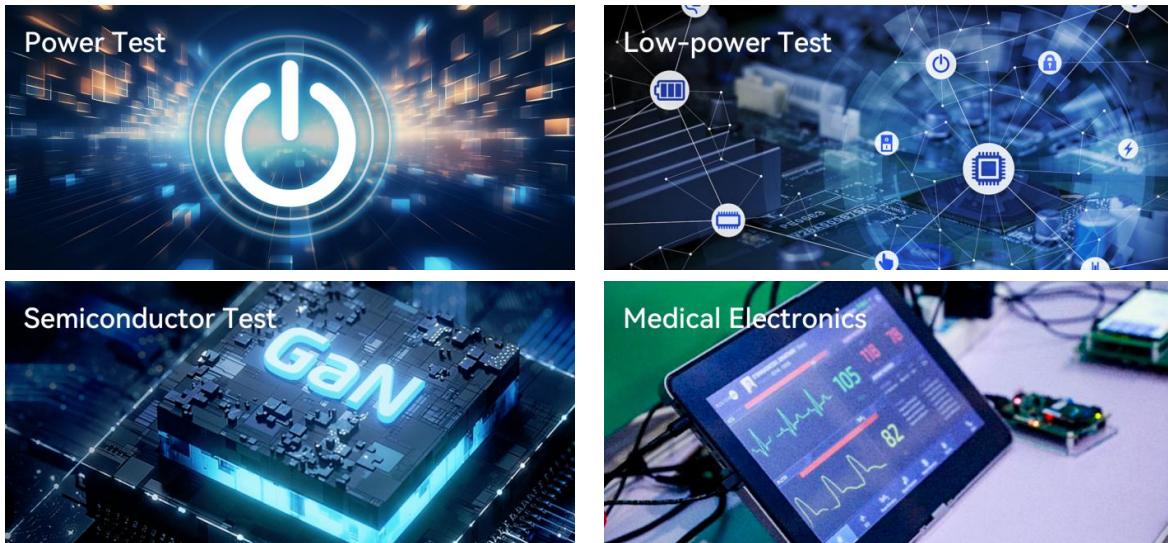


Cost-effective, Nine-in-one Integrated Oscilloscope

MSO1000HD series integrates nine instrument functions, including a digital oscilloscope, logic analyzer, function/arbitrary waveform generator, spectrum analyzer, digital voltmeter, high-precision frequency meter, protocol analyzer, Bode plot analyzer, and power analyzer. This is a cost-effective oscilloscope for users.




Digital Oscilloscope

- Bandwidth: 250 MHz/150 MHz
- Maximum real-time sampling rate: 2.5 GSa/s
- Maximum storage depth: 100 Mpts
- 4 analog channels

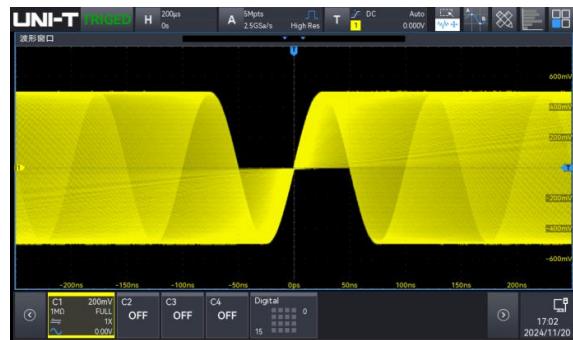


Logic Analyzer

- 16-channel logic analyzer (hardware standard) can be used with the purchase of a UT-M26 logic analyzer probe (optional).
- Maximum sampling rate: 1.25 GSa/s
- Maximum storage depth: 100 Mpts
- Minimum detectable pulse width: 5 ns
- Digital probe provides separate high 8-bit and low 8-bit connections, it simplifies the connection of DUT. When connecting to square pins, UT-M26 can be connected directly to 16x2 square pins (2.54 mm).
- Logic analyzer probe UT-M26 has great electrical characteristics, with the input impedance of $101\text{ k}\Omega \pm 1\%$ and the capacitive load of only 9.0 pF .

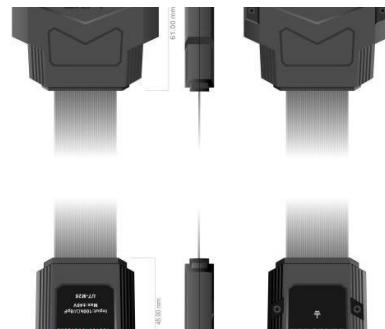


Function/Arbitrary Waveform Generator

- 25 MHz equivalent performance single-channel output
- Sampling rate: 200 MSa/s
- Vertical resolution: 14-bit
- Multiple built-in standard waves: Sine, square, pulse, ramp, arbitrary, noise, and DC
- AM, FM, ASK, FSK, and sweep frequency output

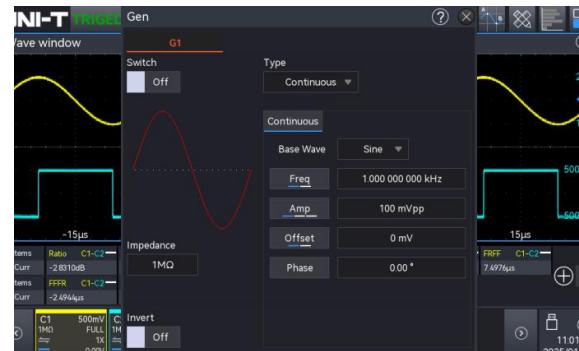

Spectrum Analyzer

- Standard enhanced FFT with up to 1 Mpts for 4-channel signal analysis
- Frequency range: 0 to 1.25 GHz
- Waterfall curve
- 4 traces and 4 detections
- Mark type: Auto, manual and threshold
- Marker point list

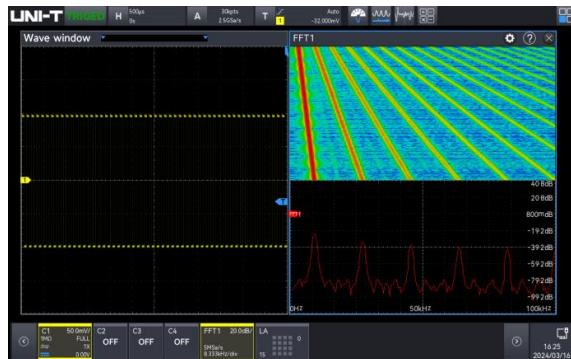

Digital Voltmeter

- 4-digit voltmeter
- Measurement: DC/AC RMS/AC+DCRMS
- Limit alarm



High-precision Frequency Meter

- 7-digit hardware frequency meter
- Frequency meter: Refresh time and adjustable effective digit settings
- Summary counter



Bode Plot Analyzer

- Built-in function/arbitrary waveform generator
- Frequency response analysis
- Loop stability analysis
- Filter analysis
- Amplifier analysis



Protocol Analyzer

- 7 kinds of triggering and decoding protocols, including those for computers, embedded serial buses, automobile, and audio applications.
- Decoding can be operated in the pause and record modes.
- Supports event list and search function




Name	Description	Standard
Computer serial bus triggering and analysis	RS-232/422/485/UART	Standard
Embedded serial bus triggering and analysis	I ² C, SPI	Standard
Automobile serial bus triggering and analysis	CAN	Standard
Automobile serial bus triggering and analysis	LIN	Standard
Automobile serial bus triggering and analysis	CAN-FD	Standard
Audio serial bus triggering and analysis	Audio	Standard

Power Analyzer

With the development of chip technology, the requirements for power supply systems are also increased. Nowadays, low-voltage, high-current power supply networks have become a trend. Especially for chips or networks composed of precision components, it is essential to ensure reliable power supply and noise suppression across various parts of the circuit, as well as to maintain the integrity of signal transmission between chips. This presents greater challenges for power supply testing. Designers are now more focused on energy-efficient power supplies and response speed to ensure the power supply remains stable and clean. Based on this, power integrity testing becomes particularly important. Power integrity directly affects signal integrity, and conversely, signal quality also reflects power quality. Furthermore, power quality can cause a series of electromagnetic interference issues, which can be a significant concern for designers. Therefore, having an oscilloscope capable of power analysis is undoubtedly your best choice.

MSO1000HD series provides a comprehensive set of power analysis tools and evaluation results. To use them, simply select the appropriate analysis type and connect the voltage probe and current probe to the power system test point or specified test fixtures, as shown in the diagram. Then, connect to the desired channel for observation and make any necessary fine-tuning adjustments to achieve your desired results.

- Power quality
- Ripple wave analysis
- Harmonic analysis
- Loop analysis
- Switching loss *
- Safety operation area *

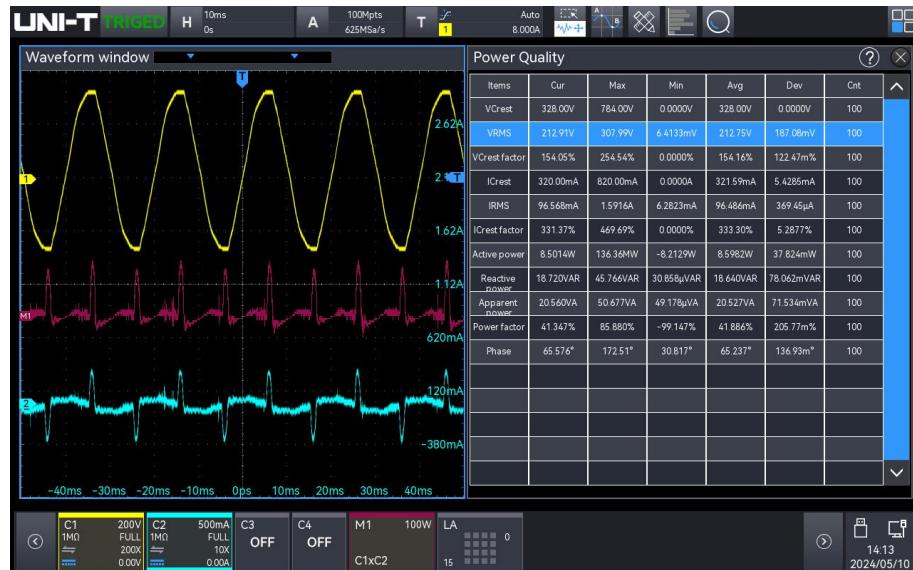


“*” indicates features being added. Power analysis support is subject to the latest firmware available on the official website.

Ultra Phosphor 3.0

When attempting to identify and debug occasional or intermittent anomalies in signals, the waveform capture rate is a crucial indicator. This rate represents the oscilloscope's ability to capture waveforms per unit of time, reflecting its speed in processing and analyzing signals.

MSO1000HD series uses advanced software and hardware architecture to achieve 5 to 10 times higher data processing performance than previous generation products. Equipped with Ultra Phosphor 3.0, it supports 8-channel parallel graph mapping, with a processing rate of up to 20 Gbps and the waveform capture rate of up to 500,000 wfms/s, and up to 1 million 1.80 ns fast edge signals in sequence mode, facilitating easy and accurate capture of occasional signals.

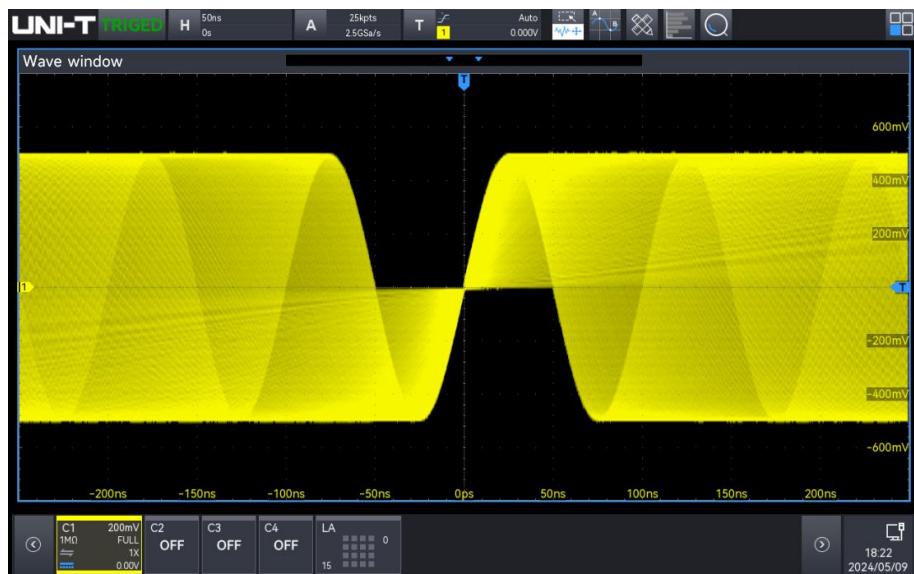

Brand New Quick Autoset Strategy

Fuzzy control is an intelligent control method based on fuzzy set theory, fuzzy linguistic variables, and fuzzy logic reasoning. The advantages of the algorithm are fewer iterations, faster speed, and better anti-interference ability.

In the past, oscilloscopes performed Autoset to find the appropriate signal amplitude and frequency for display. However, the response speed varied significantly among oscilloscope manufacturers due to different solutions adopted. This inconsistency affected the user experience.

UNI-T has redefined Autoset execution by adopting a fast fuzzy algorithm based on analog signals and multi-channel parallel processing technology. This is complemented by a 7-bit high-precision hardware frequency counter, allowing the oscilloscope to quickly find and process the amplitude and frequency of unknown signals during Autoset execution. The entire channel can be opened in less than 1.5s, and a single channel in less than 1s, greatly enhancing working efficiency and reducing the risk of misuse for users who frequently change test objects and require rapid testing.

Type-C for Power Supply

MSO1000HD series adopts the latest Type-C power supply method. When no power source is available outdoors, it can be powered by a portable charger.



Wall-mounted Interface


In a crowded laboratory or other limited-space environments, the wall-mounting option provides a more convenient and flexible way to use MSO1000HD series without occupying valuable workspace. The wall-mounted interface on the rear panel measures 100 mm x 100 mm.

Multiple Parameter Measurements

Parameter measurement is a crucial function for engineers when using an oscilloscope.

MSO1000HD series provides 56 measurement parameters, with the capability to display up to 21 measurement parameters simultaneously. Each page of measurement statistics displays 7 parameters, which can be presented in histograms and trend charts. The histogram visually represents the probability distribution of the parameters, while the trend chart reflects parameter changes over time.


The parameter snapshot displays 39 test items for single-channel measurement. These include voltage and time measurement parameters, with measured results constantly refreshed during the process. MSO1000HD series introduces a new amplitude calculation strategy, incorporating both top and bottom measurement methods. Parameters related to RMS (root mean square), burst, setup, and hold can be configured, making it easier for engineers to utilize the parameter measurement function and enabling accurate, real-time analysis of channel measurement data.

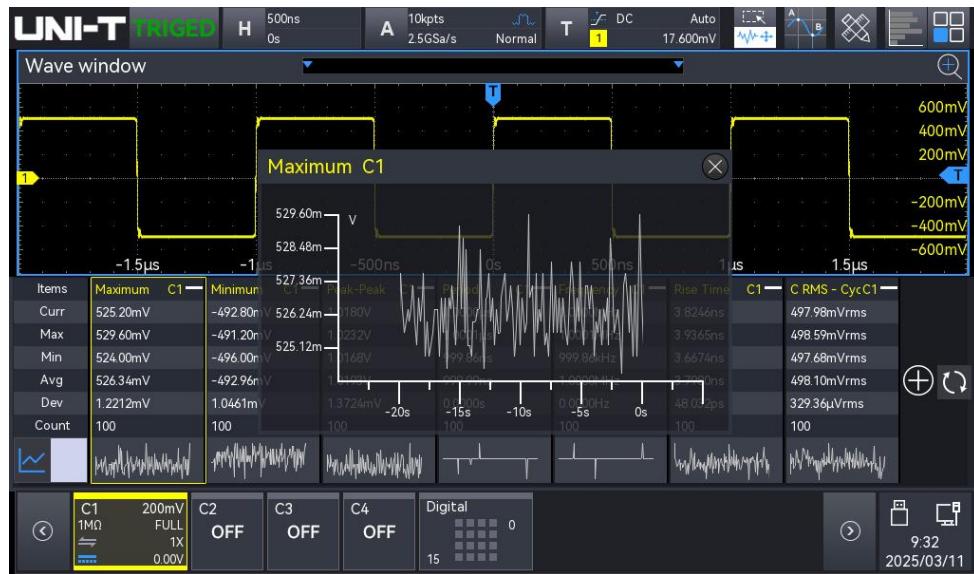

Mathematical Operation


MSO1000HD series provides a system of algorithms for complex waveform operations, allowing you to further process waveforms and display the results directly on the oscilloscope.

- Basic operation: +, -, *, ÷
- Digital filter: High-pass, low-pass, band-pass, and band-limit
- Custom function operation: Analog channel and reference waveform

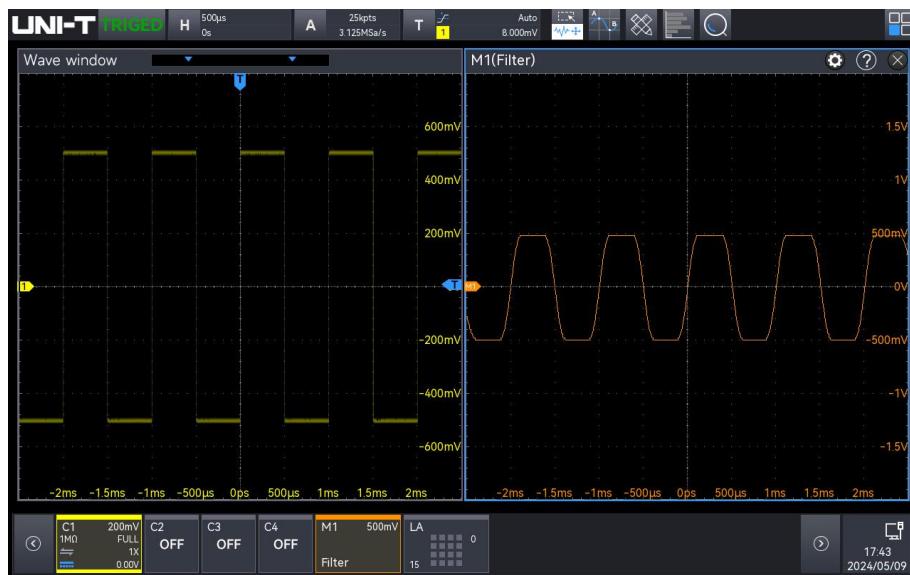


Navigation and Search

The storage depth of MSO1000HD series is 100 Mpts, allowing it to capture tens of thousands of waveforms in one capture. Searching for waveforms manually can be time-consuming for engineers. MSO1000HD series provides customizable search conditions, which are very useful for locating sampled signals and finding waveforms of interest. With the analysis function, events can be analyzed in detail, eliminating the time-consuming and inconvenient process of manual searches.

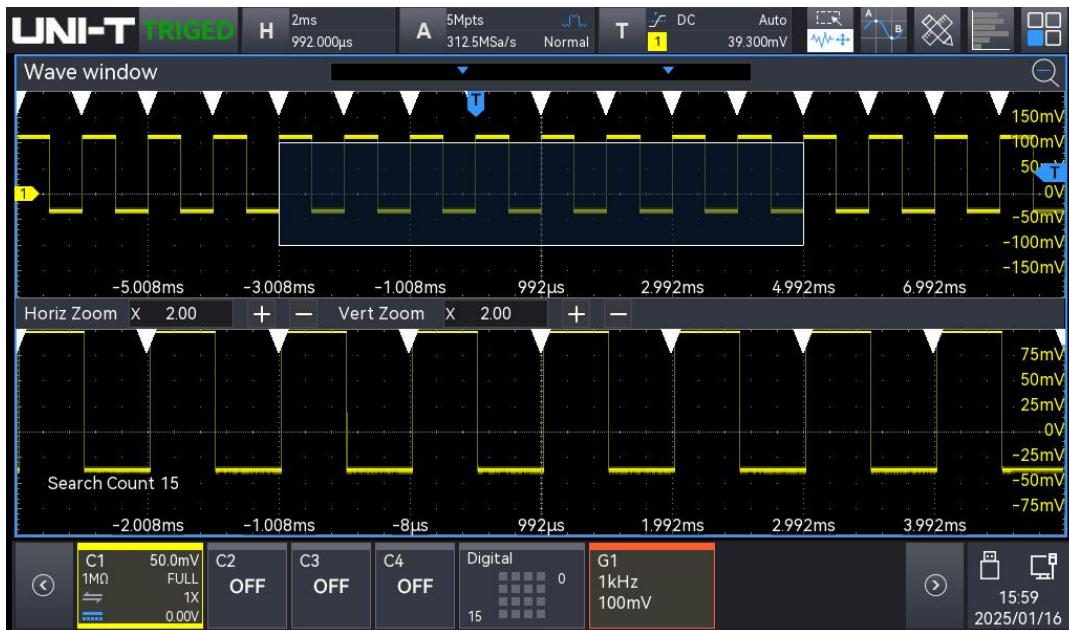

Hardware-accelerated Template Test

Using hardware-accelerated template testing, the waveform test can be completed in a few seconds to meet special standards.

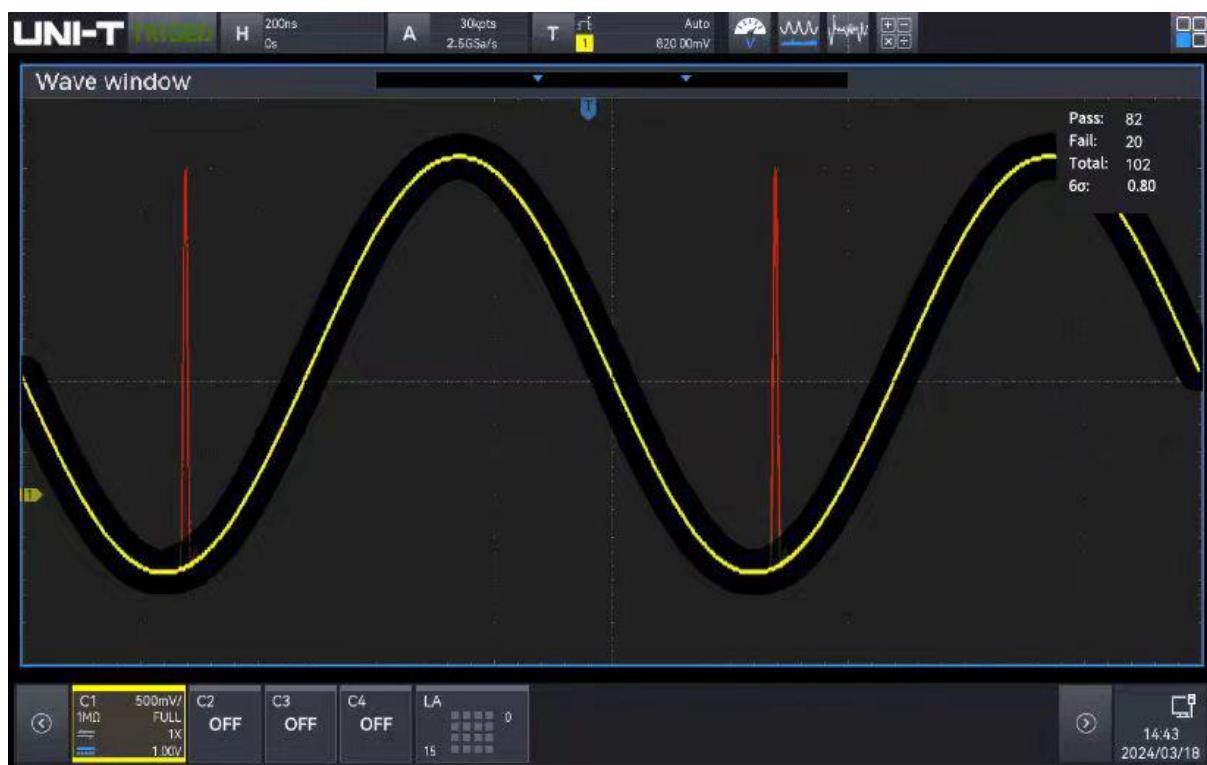

Zone Trigger

The zone trigger function serves two purposes: firstly, to isolate occasional abnormal signals, and secondly, to stabilize the waveform display. Only a stable trigger can provide a stable waveform display. With this function, engineers can handle complex and variable signals during debugging. The zone trigger function is easy to use, so engineers don't have to spend time learning how to use it.

A rectangle drawing gesture can quickly isolate a signal to be observed. The waveform does not have to be completely stable to trigger; the zone trigger function can capture a waveform that meets the specified conditions and stabilize it for triggering.



Various Connection

MSO1000HD series offers a wide range of connections with flexibility and convenience.



Multiple Control Methods

Control or secondary development through the instruction set conforming to the SCPI standard.

```
def test_square_character(dst_instr, src_instr, image_list, sheet_list, test_para, sbc_ChangeChannel1234_9000T):
    test_para['AutoTest'] = True
    dst_instr.write('*RST')
    src_instr.write('*RST')
    time.sleep(3)
    dst_instr.write(":ACQ:TYPE AVER")
    dst_instr.write(":ACQ: AVER: COUN 8")
    time.sleep(1)
    data = dst_instr.query("SYSTem:INPut?").strip('\n').strip('\r')
    strArray = data.split(',')
    channelNumbers = 4
    for i in range(channelNumbers):
        srcChannelNumber = i + 1
        dstChannelNumber = i + 1
        channelName = "CH{0}".format(dstChannelNumber)
        src_instr.write(":CHANNEL{0}:BASE:WAVE SQURE".format(srcChannelNumber))
        src_instr.write(":CHANNEL{0}:OUTPUT 1".format(srcChannelNumber))
        dst_instr.write(":CHAN{0}:DISP ON".format(dstChannelNumber))
        time.sleep(1)
        dst_instr.write(":CHAN{0}:COUP DC".format(dstChannelNumber))
        dst_instr.write(":WAVEform:SOURce CHAN{0}".format(dstChannelNumber))
        dst_instr.write(":WAVEform:MODE NORMAL")
        dst_instr.write(":WAVEform:FORMAT BYTE")
        for amp, vbase in zip(amps, vbases):
            src_instr.write(":CHANel{0}:BASE:AMPitude {1}".format(srcChannelNumber, amp))
            time.sleep(0.5)
            dst_instr.write("TRIGGER:SOURce CHANel{0}".format(dstChannelNumber))
            dst_instr.write("CHAN{0}:SCAL {1:6f}V".format(dstChannelNumber, vbase))
            time.sleep(0.1)
            for freq, timeBase, precision in zip(freqs, times, precisions):
                if(freq <= 100):

```

Use UNI-T free instrument manager for control.

It can be controlled by installing instrument management software on the PC side through LAN or USB Device.



WebServer

SCPI for remote checking and control

Export waveform files

Browsing the user manual online

PC/Mobile phone access



Document Version and Revision

Document Version V1.0

Document Revision Original version

Firmware version: V1.00.0042 Logic version: V1.00.0024 Hardware version: V1.03.0000

Performance Characteristics

All specifications are guaranteed, except those marked "Typical (Typ.)".

Unless otherwise stated, all the performance characteristics are suitable for the probe attenuation ratio is set to 10x and MSO1000HD series high-resolution oscilloscopes.

To meet these specifications, the oscilloscope should first meet the following conditions.

- The instrument must be operated continuously for at least thirty minutes at the specified operating temperature.
- The self-calibration must be performed when the operating temperature reaches or exceeds 5 °C.

Model	MSO1254HD	MSO1254HD-S	MSO1154HD	MSO1154HD-S
Analog bandwidth	250 MHz		150 MHz	
Calculated rise time (10 to 90%) (typical)	≤ 1.40 ns		≤ 2.20 ns	
Input/output channel number	4 analog channels 16 digital channels 1 channel signal output (Only MSO1154HD-S, MSO1254HD-S)			
Sampling mode	Real-time sampling			
Acquisition mode	Normal, peak detect, high resolution, averaging, enhanced resolution			
ERES	Enhanced bit: 1, 1.5, 2, 2.5, 4 (12 to 16-bit)			
Maximum sample rate	Analog channel: 2.5 GSa/s (single channel), 1.25GSa/s (dual channels), 625MSa/s (four channel) Digital channel: 1.25 GSa/s			
Average	After all channels have reached N samples simultaneously, the number of N times can be selected from 2, 4, 8, 16, 32, 64, 128, 256, 512, 1024, 2048, 4096, 8192.			
Memory depth	Auto (limit to 5 Mpts), 25 kpts, 250 kpts, 500 kpts, 5 Mpts, 50 Mpts, 100 Mpts			
Maximum waveform capture rate	200,000 wfms/s 1,000,000 wfms/s (sequence mode)			
Sequential sampling	Maximum 100,000 frames, minimum two trigger intervals < 1000 ns			
Hardware real-time waveform recording and playing	100,000 frames			
Screen	7 - inch 1024x600 HD capacitive touch screen			

Vertical System (Analog channel)

Input coupling	DC, AC, GND
Input impedance	$(1 \text{ M}\Omega \pm 2\%) \parallel (17 \text{ pF} \pm 2 \text{ pF})$
Probe attenuation factor	Voltage probe ratio: 0.001X, 0.01X, 0.1X, 1X, 10X, 100X, 1000X, Custom Current probe ratio: 5 mV/A, 10 mV/A, 50 mV/A, 100 mV/A, 200 mV/A, 500 mV/A, 1V/A, Custom
Maximum input voltage	400 V (DC+ACVpk) 135 V _{RMS}
Vertical resolution	12-bit (ERES is enabled with a maximum of 16-bit)
Vertical scale	500 μ V/div to 10 V/div 500 μ V/div to 50 mV/div: $\pm 2 \text{ V}$ 51 mV/div to 1 V/div: $\pm 25 \text{ V}$ 1.02 V/div to 10 V/div: $\pm 250 \text{ V}$ Vertical offset reading: V
Band limit (typical)	20 MHz, Full
Low-frequency response	(AC coupling, -3 dB); $\leq 5 \text{ Hz}$ (on BNC)
DC gain accuracy	$< 5 \text{ mV}: \pm 2\% \text{ full scale}, \geq 5 \text{ mV}: \pm 1.5\% \text{ full scale}$
DC offset accuracy	$\pm (2\% + 0.1 \text{ div} + 2 \text{ mV})$
Unit	W, A, V, and U, default: V
Channel-to-channel isolation(typical)	DC to maximum bandwidth: $> 40 \text{ dB}$
Digital channel	
Threshold	8-channel in one group TTL (1.4 V) 5.0 V CMOS (+ 2.5 V), 3.3 V CMOS (+ 1.65 V) 2.5 V CMOS (+ 1.25 V), 1.8 V CMOS (+ 0.9 V)
Threshold selection	ECL (-1.3 V) PECL (+ 3.7 V) LVDS (+ 1.2 V) 0 V Custom
Threshold range	$\pm 20.0 \text{ V}$, 20 mV stepping
Threshold accuracy	$\pm (100 \text{ mV} + \text{threshold setting of } 3\%)$
Dynamic range	$\pm 10 \text{ V} + \text{threshold}$
Input impedance	$(101 \text{ k}\Omega \pm 1\%) \parallel (9 \text{ pF} \pm 1 \text{ pF})$
Minimum voltage swing	500 mVpp

Minimum detectable pulse width(typical)	5 ns
Vertical resolution	1 bit
Channel-to-channel deskew range	± 100 ns

Horizontal System (Analog channel)

Time base range	2 ns/div to 1 ks/div (simultaneously display the current sampling rate and memory depth)
Time base accuracy	± 5 ppm (initial accuracy); ± 2.5 ppm (the aging rate of first year); ± 4 ppm (the aging rate of ten years)
Time base delay time range	Pre-trigger (negative delay): ≥ 1 screen width Post-trigger (positive delay): 1 s to 4 ks
	Y-T (default)
	X-Y (CH1-CH2, CH1-CH3, CH1-CH4, CH2-CH3, CH2-CH4, CH3-CH4)
Time base mode	Roll, time base ≥ 50 ms/div, using the horizontal rotary knob to enter or exit Roll mode Scan, time base ≥ 50 ms/div, user can select Roll or Scan mode

Trigger

Trigger Sensitivity	CH1-CH4: ≤ 10 mV/div, The larger value of 1div or 5 mVpp > 10 mV/div, 0.5 div Enable the noise rejection, with trigger sensitivity reducing half Trigger sensitivity can be customized, with the default set to 50%
Trigger level range	Internal: ± 4 div from the center of the screen
Trigger modes	Auto, Normal, Single
Trigger holdoff range	0.0 ps to 10 s
Trigger coupling (Typ.)	DC: Allows all signals to pass AC: Blocks the DC component of the input signal HF reject: Suppresses high-frequency components of signals above 40 kHz LF reject: Suppresses low-frequency components of signals below 40 kHz
Noise reject	Suppress the high-frequency noise of signal, to reduce the error-touched possibility Enable the noise rejection, with trigger sensitivity reducing half

Zone Triggering

Zone	2 zones; source: CH1-CH4; Feature: Must Intersect, Must Not Intersect
------	---

Edge

Slope	Rising, Falling, Either
Source	CH1-CH4, D0-D15
Runt	
Trigger condition	>, <, \leq , \geq , None
Polarity	Positive, Negative
Pulse width	3.2 ns to 10 s
Source	CH1-CH4, D0-D15
Window	
Polarity	Rising, Falling, Either
Trigger condition	Enter, Exit, Time
Set	3.2 ns to 10 s
Source	CH1-CH4
Nth edge	
Slope	Rising, Falling
Idle time	3.2 ns to 10 s
Edge number	1 to 65535
Source	CH1-CH4, D0-D15
Delay	
Edge type	Rising, Falling
Trigger condition	>, <, \leq , \geq , $> <$
Delay time	3.2 ns to 10 s
Source	CH1-CH4, D0-D15
Timeout	
Slope	Rising, Falling, Either
Timeout	3.2 ns to 10 s
Source	CH1-CH4, D0-D15
Duration	
Code pattern	H, L, X
Trigger condition	>, <, \leq , \geq
Duration	3.2 ns to 10 s
Source	CH1-CH4, D0-D15
Setup and Hold	
Clock edge	Rising, Falling
Data type	H, L
Setup	3.2 ns to 10 s
Hold	3.2 ns to 10 s

Source	CH1-CH4, D0-D15
--------	-----------------

Pulse Width

Polarity	Positive, Negative
----------	--------------------

Trigger condition	>, <, ≤, ≥
-------------------	------------

Pulse Width	1.6 ns to 4 s
-------------	---------------

Source	CH1-CH4, D0-D15
--------	-----------------

Slope

Slope	Positive, Negative
-------	--------------------

Trigger condition	>, <, ≤, ≥
-------------------	------------

Time	3.2 ns to 1 s
------	---------------

Source	CH1-CH4
--------	---------

Video

PAL, NTSC, SECAM, 525 p/60, 625 p/50, 720 p/24, 720 p/25, 720 p/30, 720

Standard	p/50, 720 p/60, 1080 i/25, 1080 i/30, 1080 p/24, 1080 p/25, 1080 p/30, 1080 pfs/24
----------	---

Source	CH1-CH4
--------	---------

Pattern

Code pattern	H, L, X, Rising, Falling
--------------	--------------------------

Source	CH1-CH4, D0-D15
--------	-----------------

RS232/UART

Trigger condition	Start, FrameErr, CheckErr, Data
-------------------	---------------------------------

Baud rate	2400 bps, 4800 bps, 9600 bps, 19200 bps, 38400 bps, 57600 bps, 115200 bps, custom
-----------	--

Data bit	5 bits, 6 bits, 7 bits, 8 bits
----------	--------------------------------

Source	CH1-CH4, D0-D15
--------	-----------------

I²C

Trigger condition	Start, Restart, Stop, Loss, Address, Data, Address & Data
-------------------	---

Addr mode	7 bits, 10 bits
-----------	-----------------

Addr range	0 to 7F, 0 to 3 FF
------------	--------------------

Byte length	1 to 5
-------------	--------

Source	CH1-CH4, D0-D15
--------	-----------------

SPI

Mode	Timeout, CS
------	-------------

Trigger condition	Start, Data
-------------------	-------------

Timeout	99.2 ns to 1 s
---------	----------------

Data bit	4 bits to 32 bits
----------	-------------------

Source	CH1-CH4, D0-D15
--------	-----------------

CAN

Signal type	CAN_H, CAN_L
Trigger condition	Start, Data Frame, Remote Frame, Error Frame, Over-Load, Identifier, Data, Identifier&Data, End of Frame, Missing Ack, Biterror, CRC, Error, ALL Errors
Data rate	10 kbps, 19.2 kbps, 20 kbps, 33.3 kbps, 38.4 kbps, 50 kbps, 57.6 kbps, 62.5 kbps, 83.3 kbps, 100 kbps, 115.2 kbps, 125 kbps, 230.4 kbps, 250 kbps, 490.8 kbps, 500 kbps, 800 kbps, 921.6 kbps, 1 Mbps, 2 Mbps, 3 Mbps, 4 Mbps, 5 Mbps, custom

Source	CH1-CH4, D0-D15
--------	-----------------

CAN-FD

Signal type	CAN_H, CAN_L
Trigger condition	Start, Data Frame, Remote Frame, Error Frame, Over-Load, Identifier, Data, Identifier&Data, End of Frame, Missing Ack, Bit Error, CRC Error, ALL Errors
Data rate	10 kbps, 19.2 kbps, 20 kbps, 33.3 kbps, 38.4 kbps, 50 kbps, 57.6 kbps, 62.5 kbps, 83.3 kbps, 100 kbps, 115.2 kbps, 125 kbps, 230.4 kbps, 250 kbps, 490.8 kbps, 500 kbps, 800 kbps, 921.6 kbps, 1 Mbps, 2 Mbps, 3 Mbps, 4 Mbps, 5 Mbps, custom
FD data rate	250 kbps, 500 kbps, 800 kbps, 1 Mbps, 1.5 Mbps, 2 Mbps, 4 Mbps, 6 Mbps, 8 Mbps, custom

Source	CH1-CH4, D0-D15
--------	-----------------

LIN

Trigger condition	Sync, Identifier, Data, Identifier & Data, Wake Frame, Sleep Frame, Error
Version	v1.x, v2.x, Either
Baud rate	1.2 kbps, 2.4 kbps, 4.8 kbps, 9.6 kbps, 10.417 kbps, 19.2 kbps, 20 kbps, custom
Data length	1 to 8
Source	CH1-CH4, D0-D15

Audio

Trigger condition	Word, Left, Right, Any
Format	Standard, Left Aligned, Right Aligned, TDM
Source	CH1-CH4, D0-D15

Decoding

Number of decodes	4
Decoding type	Standard: RS232/UART, I2C, SPI CAN, CAN-FD, LIN, Audio
Parallel	Up to 18 bits parallel bus decoding, supports the combination of analog channel and digital channel and supports custom time setting
Source	CH1-CH4, D0-D15

Measurement

Cursor	Voltage difference between cursors ($\triangle Y$)
	Time difference between cursors ($\triangle X$)
	Reciprocal of $\triangle X$ (Hz) ($1/\triangle X$)
	Voltage and time of waveform point
Display the cursor in the automatic measurement	
Analog channel: 56 kinds of parameter	
Automatic measurements	Maximum, Minimum, Top, Base, Amplitude, Middle, Peak-Peak, Average, Average-Cycles, RMS, RMS-Cycles, AC RMS, AC RMS-Cycles, Area, Area-Cycles, +Area, -Area, +Area-Cycles, -Area-Cycles, +Overshoot, -Overshoot, +Preshoot, -Preshoot, Period, Frequency, Rise time, Fall time, +Width, -Width, +Duty, -Duty, +Pulse count, -Pulse count, Rising edge count, Falling edge count, Burst width, Burst Interval, Burst Period, Burst Per count, Ratio, Period Ratio, Setup time, Hold time, Setup & Hold Ratio, FRFR, FRFF, FFFR, FFFF, FRLF, FRLR, FFLR, FFLF, Delay(r-r), Delay(f-f), Phase(r-r), Phase(f-f)
	Digital channel: Frequency, Period, +Width, -Width, +Duty, -Duty, Rising delay A→B, Falling delay A→B, Phase A→B, Phase B→A
Measurement mode	Common measurement and accuracy measurement (Full memory hardware measurements)
Measurement type	Simultaneously display 21 kinds of parameter measurement
Measurement range	Main time base, Zoom time base, Cursor area
Measurement statistics	Mean, Maximum, Minimum, Std Dev, Count, Tendency chart, Bar Chart
XY measurement	Time, Cartesian, Polar, Product, Ratio
Analysis	Frequency Counter, DVM, Pass/Fail, Waveform recording, Bode plot, Power Analysis

Power Analysis

Measure	Power quality, Current harmonics, Surge current, Rds(on), Switching Loss, Conversion rate, Safe operating area, Modulation analysis, Output ripple, Startup/shutdown time, Transient response, Power efficiency

Histogram

Source	CH1 to CH4
Type	Horizontal, Vertical

Math

Waveform math	A+B, A-B, A×B, A÷B, Advanced, Filter
Filter	Low pass, High pass, Band pass, Band stop

Operation	0,1,2,3,4,5,6,7,8,9 (+, -, *, /, ^, >, <, &&, , ==, !=)
Function	sin, cos, sinc, tan, sqrt, exp, lg, ln, floor, abs, acos, asin, atan, sinh, tanh, ceil, cosh, fabs, intg, diff
FFT	
Channel number	4
Window types	Hanning, Hamming, Rectangle, Blackman
FFT count	Up to 1 Mpts
FFT vertical scale	Vrms, dB
	Waterfall: ON, OFF
FFT	Spectrum range: Start frequency, Stop frequency, Center frequency, Span
	Four traces: Normal, Average, Max Hold, Min Hold
	Marker: Marker type, Marker Points, Marker list
Storage	
Setting	Set Status (.set)
Waveform	Waveform data (*.dat) (*.csv) (*.bsv)
Image	Image storage (*.bmp) (*.png) (*.jpg)
Report	Decoding Event List (*.csv) (*.pdf) (*.html)
Gen (Only MSO-S)	
Channel	1
Sample rate	200 MSa/s
Vertical resolution	14-bit
Maximum frequency	25 MHz
Standard	Sine, Square, Ramp, Pulse, Noise, DC and Arbitrary wave
Built-in arbitrary	200 types including Sinc, ExpRise, ExpFall, Cardiac, Gauss, Lorentz, and HaverSine
	Frequency range: 1 µHz to 25 MHz
Sine wave	Flatness: ± 0.5 dB (relative 1 kHz)
	Harmonic distortion: -40 dBc
	Non-harmonic spurious (typ): -40 dBc
	Total harmonic distortion: 1% (DC to 20 kHz, 1 Vpp)
	SNR: 40 dB
	Frequency range
Square wave/Pulse wave	Square wave: 1 µHz to 10 MHz; Pulse wave: 1 µHz to 10 MHz
	Rising/falling time: <16 ns (Typ. 1 kHz, 1 Vpp, 50 Ω)
	Overshoot: Typ. 2% (1 kHz, 1 Vpp, 50 Ω)
	Duty ratio

	Square wave: 1% to 99%, adjustable; Pulse wave: 1% to 99%, adjustable
	Resolution of duty ratio: 1% or 22 ns (take the greater value of both)
	Minimum pulse width: 22 ns
	Resolution of pulse width: 10 ns
	Jitter: ≤ 5 MHz: 2 ppm + 200 ps > 5 MHz: 200 ps
	Frequency range: 1 μ Hz to 400 kHz
Ramp wave	Linearity: 1%
	Symmetry: 0.1% to 99.9%
Noise	Bandwidth: 25 MHz
	Frequency range: 1 μ Hz to 5 MHz
Arbitrary wave	Waveform length: 4 k
	Internal save position: 200
Frequency	Accuracy: ± 5 ppm (initial accuracy); ± 2.5 ppm (the aging rate of first year); ± 4 ppm (the aging rate of ten years)
	Resolution: 1 μ Hz
	Output range: 20 mVpp to 6 Vpp (high resistance); 10 mVpp to 3 Vpp (50 Ω)
Amplitude	Resolution: 1 mV
	Accuracy (Typical value: 1 kHz, sine wave, 0V, deviation): $\pm (5\% + 2$ mVpp)
	Range: ± 3 V (high resistance); ± 1.5 V (50 Ω)
DC offset	Resolution: 1 mV
	Accuracy: \pm (offset set value 5% + 2 mV)

AM

Carrier wave	Sine, Square, Ramp, Arbitrary wave
Source	Internal
Modulated wave	Sine, Square, Rising ramp, Falling ramp, Noise, Arbitrary wave
Modulation frequency	2 mHz to 50 kHz
Modulation depth	0% to 120%

FM

Carrier wave	Sine, Square, Ramp, Arbitrary wave
Source	Internal
Modulated wave	Sine, Square, Rising ramp, Falling ramp, Noise, Arbitrary wave
Modulation frequency	2 mHz to 50 kHz
Deviation	12.5 MHz (maximum)

ASK

Carrier wave	Sine, Square, Ramp, Arbitrary wave
Modulated wave	Square wave (Duty ratio 50%)
Modulation frequency	2 mHz to 50 kHz

FSK

Carrier wave	Sine, Square, Ramp, Arbitrary wave
Modulated wave	Square wave (Duty ratio 50%)
Modulation frequency	2 mHz to 50 kHz
Hopping frequency	Any frequency within the range of the Carrier wave signal

Sweep

Mode	Linear, Logarithmic
Sweep time	1 ms to 500 s
Start and stop frequency	Any frequency within the range of the waveform

Display

Screen	7 - inch multi-touch capacitive screen
Resolution	1024×RGB×600 vertical pixel
Color	24-bit true colors
Persistence	Auto, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 5 s, 10 s, 20 s, infinite, close
Display type	Point, Vector
Real-Time clock	Time and data (user-defined)
Waveform Intensity	1% to 100% (default 50%)
Grid Intensity	0% to 100% (default 50%)
Backlight Intensity	1% to 100% (default 50%)
Transparent	0% to 100% (default 50%)

Bode plot (Only MSO-S)

Mode	Bode, PSRR
Start frequency	50 Hz to 25 MHz
Stop frequency	60 Hz to 25 MHz
Count	1 to 1000
Amplitude	High resistance: 20 mVpp to 6 Vpp 50Ω: 10 mVpp to 3 Vpp

DVM (typical)

Source	Analog channel
--------	----------------

Mode	DC, AC+DC RMS, AC RMS
Resolution	4-bit
Buzzer	Beeps when the specified limit values are reached or exceeded
Frequency Counter	
Source	Any analog channel and digital channel
Measurement	Frequency, Period, Totalizer
Counter	The maximum effective digits are 7, and the refresh time and effective digits are adjustable.
Maximum measurement frequency	Maximum bandwidth of analog channel
Time reference	Internal reference: ± 5 ppm (initial accuracy); ± 2.5 ppm (the aging rate of first year); ± 4 ppm (the aging rate of ten years)
Interface	
USB-Host 2.0	1 on the front panel
USB-Device 2.0	1 on the rear panel
LAN	LAN (VXI11), 10/100 Base-T, RJ-45
AUX Out	Trig Out, Pass/Fail, DVM
Gen Out	1 on the rear panel (Only MSO-S)
HDMI ¹	1 port for external display or projector
General technical specification	
Probe compensator output	
Output voltage	3 Vpp
Frequency	10 Hz, 100 Hz, 1 kHz (default), 10 kHz
Power Source	
Power source voltage	Power is greater than or equal to 12 V/3 A
	Supports Type-C or a portable charger with PD protocol
Power consumption	65 W Max
Fuse	1.6 A
Environmental	
Temperature	Operating: 0°C to +40°C Non-operating: -20°C to +60°C
Cooling	Forced cooling by fan
Humidity	Operating: below +35 °C, relative humidity $\leq 90\%$ non-operating: +35 °C to +40 °C, relative humidity $\leq 60\%$
Altitude	Operating: below 3,000 meters; non-operating: below 15,000 meters
Pollution degree	2

Operating environment In-door

Mechanical Specifications

Dimension (W×H×D) 282 mm×175 mm×49 mm

Weight 1.56 kg

Calibration interval

Calibration interval 1 year

Safety Regulations

Compliance with EMC directive (2014/30/EU), compliance with or superior to
 IEC 61326-1:2021/ EN61326-1:2021,
 IEC 61326-2-1:2021/ EN61326-2-1:2021

Electromagnetic compatibility	Conducted disturbance	CISPR 11/EN 55011	CLASS B group 1, 150 kHz-30 MHz
	Radiation disturbance	CISPR 11/EN 55011	CLASS B group 1, 30 MHz-1 GHz
	(ESD)	IEC 61000-4-2/EN 61000-4-2	4.0 kV (contact), 8.0 kV (air)
	Radio sensitivity	IEC 61000-4-3/EN 61000-4-3	0V/m (80 MHz to 1 GHz) 3V/m (1.4 GHz to 2 GHz) 1V/m (2.0 GHz to 2.7GHz)
	Electrical fast transient (EFT)	IEC 61000-4-4/EN 61000-4-4	2kV (AC input)
	Surge	IEC 61000-4-5/EN 61000-4-5	1kV (live to zero) 2kV (live/zero to ground)
	Radio continuous sensitivity	IEC 61000-4-6/EN 61000-4-6	3V, 0.15-80 MHz
	Voltage dip and short-term interruption	IEC 61000-4-11/EN 61000-4-11	Voltage dip: 0% UT during 1 cycle 40% UT during 10/12 cycles 70% UT during 25/30 cycles Short-term interruption: 0% UT during 250/300 cycles
Safety specification		EN 61010-1:2010+A1:2019	
		EN IEC61010-2-030:2021+A11:2021	
		UL61010-1:2012 Ed.3+ R:19 Jul2019	
		UL61010-2-030:2018 Ed.2	
		CSA C22.2#61010-1:2012 Ed.3+U1;U2;A1	

Remarks

1: only support standard HDMI, not support other adapters.

Order Information

	Description	Order No.
Model	MSO1154HD (150 MHz, 4 analog channels+16 digital channels)	MSO1154HD
	MSO1154HD-S (150 MHz, 4 analog channels,16 digital channels, Gen)	MSO1154HD-S
	MSO1254HD (250MHz, 4 analog channels+16 digital channels)	MSO1254HD
	MSO1254HD-S (250MHz, 4 analog channels,16 digital channels, Gen)	MSO1254HD-S
Standard accessories	National standard cable x 1	
	USB2.0 cable x 1	UT-D14
	Passive probe (300 MHz/200 MHz) x 4	UT-P06/UT-P05
	Isolation transformer	UT-ISOT
Optional accessories	Deskew Fixture	UT-DF01
	High voltage probe	UT-V23/UT-P21/UT-P20
	High voltage differential probe	UT-P30/UT-P31/UT-P32/ UT-P33/UT-P35/UT-P36
	Current probe	UT-P40/UT-P41/UT-P42/ UT-P43/UT-P44/UT-P4030D/UT-P4150/UT-P4500/P4100A/P4100B
	16-channel logic analyzer probe	UT-M26

Remarks: Please order all hosts, accessories and options from your local UNI-T distributor.

Oscilloscope Probes and Accessories

Passive Probe

Model	Type	
UT-P01	High resistance probe	1X: DC to 8 MHz 10X: DC to 25 MHz Oscilloscope compatibility: All UNI-T series
UT-P03	High resistance probe	1X: DC to 8 MHz 10X: DC to 60 MHz Oscilloscope compatibility: All UNI-T series
UT-P04	High resistance probe	1X: DC to 8 MHz 10X: DC to 100 MHz Oscilloscope compatibility: All UNI-T series
UT-P05	High resistance probe	1X: DC to 8 MHz 10X: DC to 200 MHz Oscilloscope compatibility: All UNI-T series
UT-P06	High resistance probe	1X: DC to 8 MHz 10X: DC to 300 MHz Oscilloscope compatibility: All UNI-T series
UT-P07A	High resistance probe	10X: DC to 500 MHz Input resistance: 10 MΩ Maximum operating voltage: < 600V pk Oscilloscope compatibility: All UNI-T series

UT-P08A	High resistance probe	10X: DC to 350 MHz Input resistance: 10 MΩ Maximum operating voltage: < 600V pk Oscilloscope compatibility: All UNI-T series
UT-P20	High resistance probe	DC to 100 MHz Probe coefficient 100:1 Maximum operating voltage: 1500 Vrms Oscilloscope compatibility: All UNI-T series
UT-V23	High voltage probe	DC to 100 MHz Probe coefficient 100:1 Input resistance: 100 MΩ ± 2% Maximum operating voltage: 2000 Vpp Oscilloscope compatibility: All UNI-T series
UT-P21	High voltage probe	DC to 50 MHz Probe coefficient 1000:1 Maximum operating voltage: DC 15 kVrms, AC 10 kV (sine wave) Oscilloscope compatibility: All UNI-T series

Current Probe

Model	Type	
UT-P40	Current probe	DC to 100 kHz Range: 50 mV/A, 5 mV/A Current range: 0.4 A to 60 A Maximum operating voltage: 600 Vrms Oscilloscope compatibility: All UNI-T series
UT-P41	Current probe	DC to 100 kHz Range: 100 mV/A, 10 mV/A Current range: 0.4 A to 100 A Maximum operating voltage: 600 Vrms Oscilloscope compatibility: All UNI-T series

UT-P42



Current probe

DC to 150 kHz

Range: 100 mV/A, 10 mV/A

Current range: 0.4 A to 200 A

Maximum operating voltage: 600 Vrms

Oscilloscope compatibility:

All UNI-T series

UT-P43



Current probe

DC to 25 MHz

Range: 100 mV/A

Maximum test current: 20 A

Rising time: 14 ns

Oscilloscope compatibility:

All UNI-T series

UT-P44



Current probe

DC to 50 MHz

Range: 50 mV/A

Maximum test current: 40 A

Rising time: 7 ns

Oscilloscope compatibility:

All UNI-T series

UT-P4030D



High-frequency current probe

Bandwidth: DC to 100 MHz

Rising time: ≤ 3.5 ns

Range selection: 30 A/5 A

Maximum test current: 30 A

Voltage of insulated line: 300 V CAT I

Oscilloscope compatibility:

All UNI-T series

UT-P4150



High-frequency current probe

Bandwidth: DC to 12 MHz

Rising time: ≤29 ns

Range selection: 150 A/30 A

Maximum test current: 150 A

Voltage of insulated line: 600 V CATII 300 V

CATIII

Oscilloscope compatibility:

All UNI-T series

UT-P4500



High-frequency current probe

Bandwidth: DC to 5 MHz

Rising time: ≤ 70 ns

Range selection: 500 A/75 A

Maximum test current: 500 A

Voltage of insulated line: 600V CATII 300 V

CATIII

		Oscilloscope compatibility: All UNI-T series
UT-P4100A		Bandwidth: DC to 600 kHz Rising time: ≤ 583 ns Maximum test current: 100 A Range selection: 100 A/10 A Range sensitivity: 0.1 V/A, 0.01 V/A Common-mode voltage RMS: CATI 600 V CATII 600 V CATIII 300 V
	Low-frequency current probe	Oscilloscope compatibility: All UNI-T series
UT-P4100B		Bandwidth: DC to 2 MHz Rising time: ≤ 175 ns Maximum test current: 100 A Range selection: 100 A/10 A Range sensitivity: 0.1 V/A, 0.01 V/A Common-mode voltage RMS: CATI 600 V CATII 600 V CATIII 300 V
	Low-frequency current probe	Oscilloscope compatibility: All UNI-T series

Active Probe

Model	Type	
UT-P30	High voltage differential probe	DC to 100 MHz Attenuation ratio 100:1,10:1 Input differential-mode voltage: ± 800 Vpp Oscilloscope compatibility: All UNI-T series
UT-P31	High voltage differential probe	DC to 100MHz Attenuation ratio 1000:1,100:1 Input differential-mode voltage: ± 1.5 kVpp Oscilloscope compatibility: All UNI-T series

UT-P32



High voltage differential probe

DC to 50 MHz
Attenuation ratio 1000:1,100:1
Input differential-mode voltage: ± 3 kVpp
Oscilloscope compatibility: All UNI-T series

UT-P33



High voltage differential probe

DC to 120 MHz
Attenuation ratio 100:1,10:1
Input differential-mode voltage: ± 14 kVpp
Oscilloscope compatibility: All UNI-T series

UT-P35



High voltage differential probe

DC to 50 MHz
Attenuation ratio 500:1,50:1
Rising time: 7 ns
Accuracy: 2%
Input differential-mode voltage:
1/50:130 (DC+peakAC)
1/500:1300 (DC+peakAC)
Input common-mode voltage:
100 Vrms, CATI
600 Vrms, CATII
Oscilloscope compatibility: All UNI-T series

UT-P36



High voltage differential probe

DC to 50 MHz
Attenuation ratio 2000:1,200:1
Rising time: 3.5 ns
Accuracy: 2%
Input differential-mode voltage:
1/200:560 (DC+peakAC)
1/2000:5600 (DC+peakAC)
Input common-mode voltage:
2800 Vrms, CATI
1400 Vrms, CATII
Oscilloscope compatibility: All UNI-T series

Options Ordering and Installation

1. **Purchase options:** Based on your requirements, please purchase the specified function options from UNI-T Sales Personnel and provide the serial number of the instrument that needs the option installed.
2. **Receive certificate:** You will receive the license certificate based on the address provided in the order.
3. **Register and obtain license:** Visit the UNI-T official website license activation session for registration. Use the license key and instrument serial number provided in the certificate to obtain the option license code and license file.
4. **Install the option:** Download the option license file to the root directory of a USB storage device and connect the USB storage device to the instrument. Once the USB storage device is recognized, the Option Install menu will be activated. Press this menu key to begin installing the option.