

SPECIFICATIONS

ACCURACY	Setting: $\pm 0.1\%$ of set time of $\pm 50\text{mSec}$
	Repeat: $\pm 0.1\%$
RESET	Reset time < 100 msec, Front Key, Interruption of Power
OUTPUT CONTACT	SPDT (1 C/O)
CONTACT RATING	8A @ 250V AC
MODES	On delay (A)
	Interval (B)
	Asymmetrical cyclic OFF first (C)
	Asymmetrical cyclic ON first (D)
	Cyclic equal OFF first (E)
	Cyclic equal ON first (F)
	Pulse output (H)
	Delay on break (I)
	Delay on make/break (K)
	Interval after break (L)
	Single shot (P)
	Retriggerable Single shot (Q)
	Latching relay (R)
TIME RANGES	Delay with Totalise (t)
	Interval with Totalise (U)
SUPPLY VOLTAGE	0 - 99.9 sec/min/hr
	0 - 999 sec/min/hr
	0 - 9:59 min:sec
	0 - 9:59 hr:min
POWER CONSUMPTION	20-240V AC/DC
	AC : (50 / 60 Hz)
TEMPERATURE	4 VA max
HUMIDITY (NON-CONDENSING)	Operating: 0 to 50°C (32 to 122°F)
	Storage: -20 to 75°C (-4 to 167°F)
WEIGHT	95% RH
PROTECTION LEVEL	(NON-CONDENSING)
	0.163 lbs.
PROTECTION LEVEL	IP40 for Casing
	IP20 for Terminals

ORDERING INFORMATION


PART NO.	SUPPLY VOLTAGE
175MD	20-240V AC/DC AC: 50/60Hz



Multi-Function Timer "With Display"

- 15 Functions
- 8 Time Ranges
- Front Key Pad Setting
- Universal supply voltage
- Slim, Space Saving Design
- DIN Rail Mount

DIMENSIONS (MILLIMETERS)

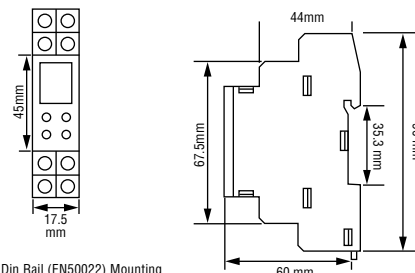

Symmetrical 35mm Din Rail (EN50022) Mounting

TERMINAL CONNECTIONS

