

CABLE VERIFICATION & TRACING ANALYZER

Model 6683



SEE WHAT'S HIDDEN. TRACE IT. VERIFY IT. FIX IT.

Locate, trace, and verify cables, conductors, and metal pipes — powered by precision digital detection

- ▶ **Pinpoint faults fast** — find shorts, opens, and breaks with precision and ease
- ▶ **Dual operation modes:**
Unipolar — Trace a single cable quickly using the ground as reference
Bipolar — Trace two circuits to identify pairs or for more accurate fault location
- ▶ **Clear digital and audible feedback** with adjustable sensitivity for accurate tracing
- ▶ **Multiple transmitter ID codes** for identifying several lines simultaneously
- ▶ **Large backlit LCDs and built-in LED flashlight** for visibility in low-light or confined spaces

Our products are backed by over 130 years of experience in test and measurement equipment, and encompass the latest international standards for quality and safety.

 **AEMC**[®]
INSTRUMENTS
CHAUVIN ARNOUX GROUP

Cable Verification & Tracing Analyzer

Model 6683

Pinpoint the Problem, Trace the Solution

The Cable Verification & Tracing Analyzer Model 6683 quickly locates, identifies, and diagnoses electrical wiring, data cables, and metal pipes — even when buried or hidden in walls. Its transmitter-receiver system combines precision detection, safety, and digital filtering for fast, reliable troubleshooting.

Whether identifying a live line, tracing a circuit back to a breaker, or finding a fault in a buried conductor, the Model 6683 simplifies complex diagnostics into a few intuitive steps.

Key Highlights:

- Detects open circuits and interruptions
- Locates cables in walls, ceilings, or underground
- Identifies presence of voltage via NCV (non-contact voltage)
- Works in energized or de-energized systems
- Provides real-time feedback via LCD and audible tone

FEATURES

- Quickly locates and traces electrical or metallic conductors, and identifies cable fault locations such as shorts and open circuits
- **Non-contact voltage detection (NCV)** up to 1000 VAC
- Dual operation modes: **Unipolar** (de-energized) and **Bipolar** (live or de-energized)
- **Adjustable sensitivity** — automatic for quick scans or manual for fine detection
- **Clear digital, visual, and audible indicators** with adjustable pitch or optional mute for precise tracing
- **Multiple transmitter ID codes** (up to 7) for identifying several lines simultaneously
- Digital filtering technology ensures **reliable detection and strong immunity to interference**
- **Large backlit LCDs** on both transmitter and receiver show transmission power, digital ID, voltage presence indicator, and battery status
- **Built-in LED flashlight** for low-light spaces
- **Auto power-off** on receiver to extend battery life



APPLICATIONS

Data Center & Telecom

- Trace and identify power and communication lines in cable trays
- Locate faults or breaks in network and control wiring
- Verify circuit continuity and connection points for rack equipment
- Detect energized or de-energized cables before maintenance or rerouting
- Distinguish multiple conductors using multiple transmitter ID codes

Electrical


- Identify fuses, circuit breakers, and other protective devices
- Trace cables concealed in walls or ceilings
- Locate outlets wired in parallel on branch circuits
- Locate hidden junction boxes behind wall coverings or finishes
- Detect live power source cables using non-contact voltage

Plumbing & Heating

- Locate metallic pipes (copper, steel)
- Trace non-metallic pipes by inserting a single-conductor cable from one accessible end

Model 6683


Applications

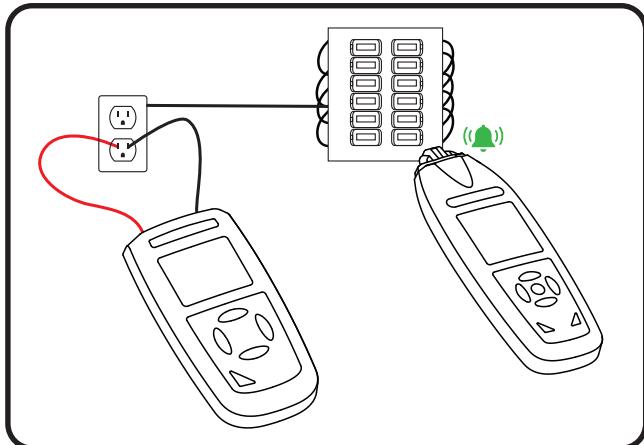


Locate and track lines and sockets

If voltage is present, the **TRANSMITTER** signals its presence and **indicates its value**. The signal emitted is **digitally coded to prevent interference**, and its power can be **adjusted manually** to refine detection. In more complex cases, the **identification code** can be configured to allow **up to 7 transmitters** to be used simultaneously.


The **RECEIVER** is equipped with a **built-in flashlight**, a **silent mode** and **automatic or manually adjustable sensitivity** for better selectivity to adapt to all situations on the construction site. Because of its NCV function, the receiver can be **used alone to locate a hot conductor connected to an energized system**.

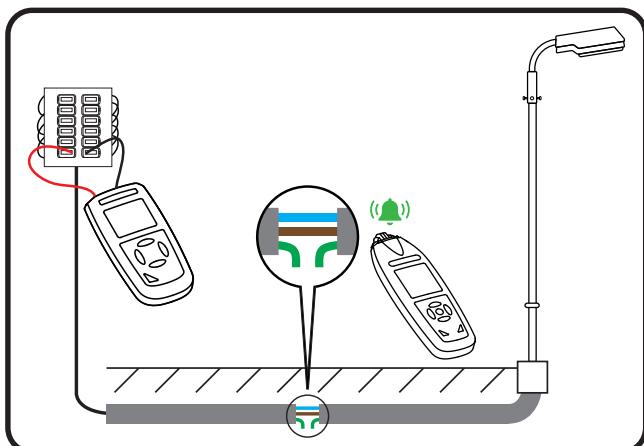


Locate a cable fault

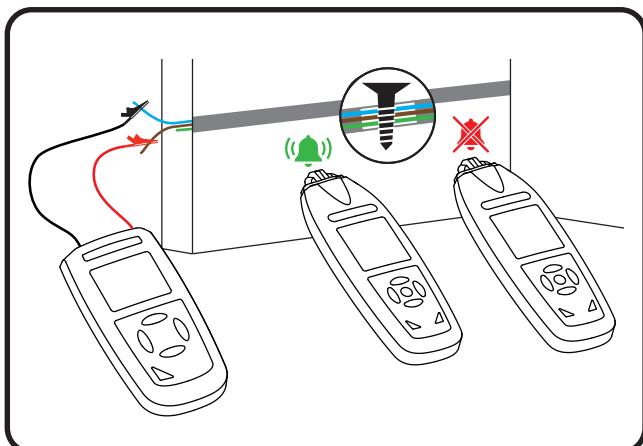

Locate damaged cables

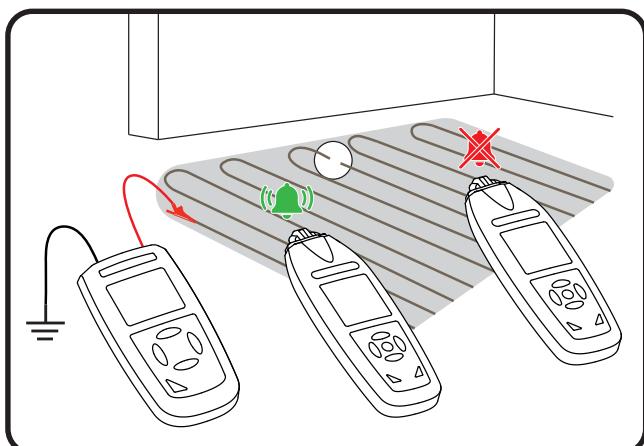

Detect faults in an underfloor heating system (unshielded)

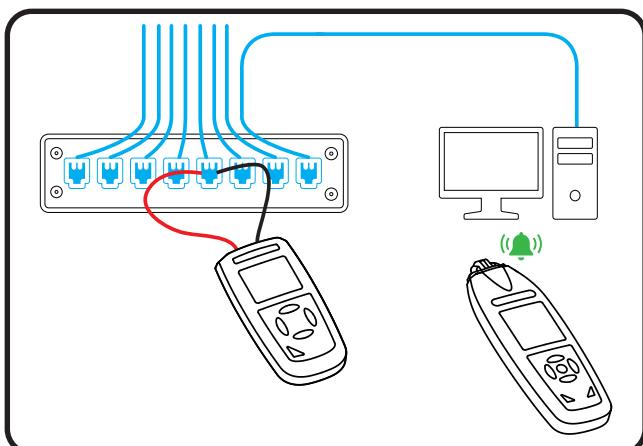

Trace twisted pair and other data cables

Model 6683

User Interface & Buttons



Transmitter (6683E)

TRANSMITTER KEYPAD (6683E)



To turn instrument ON or OFF



To increase or decrease the signal transmission strength

CODE SEL

To select the transmitter identification code



To switch the display backlighting ON or OFF

Receiver (6683R)

RECEIVER KEYPAD (6683R)



To turn instrument ON or OFF



To turn flashlight ON or OFF



To increase or decrease signal reception sensitivity in manual mode

NCV

To activate or deactivate the NCV (*non-contact voltage*) function



Short press: To switch the display backlighting ON or OFF



Long press: To activate or deactivate the sound signal


MODE

To switch detection sensitivity level from automatic to manual mode. In this case, the setting is made using the **▲▼** buttons.


If the NCV function is active, it can be deactivated to switch in the transmitter signal detection function.

Model 6683 *Screen Displays*

Transmitter Display (6683E)

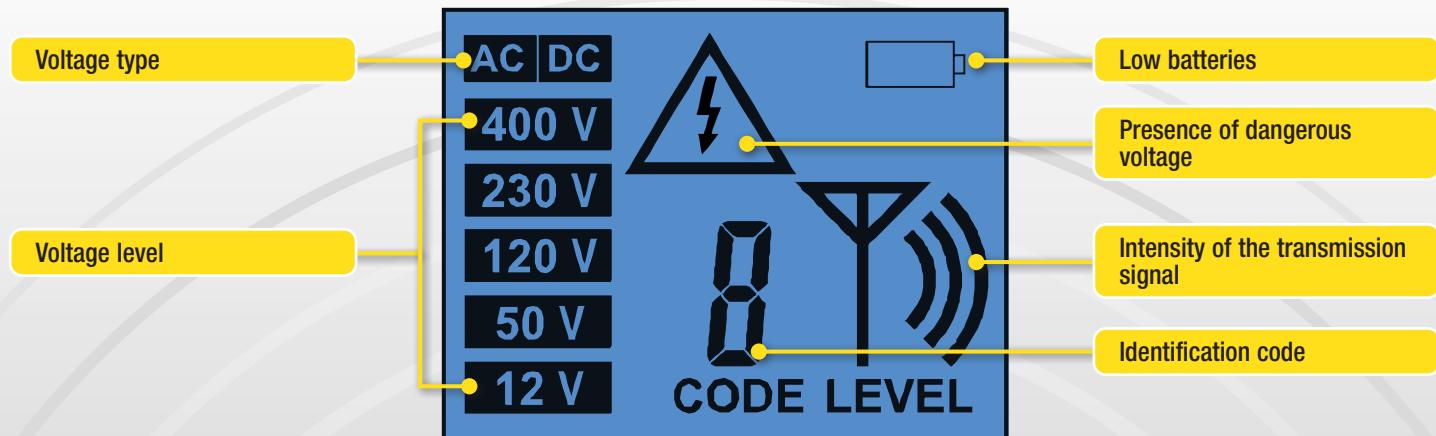

Receiver Display (6683R)

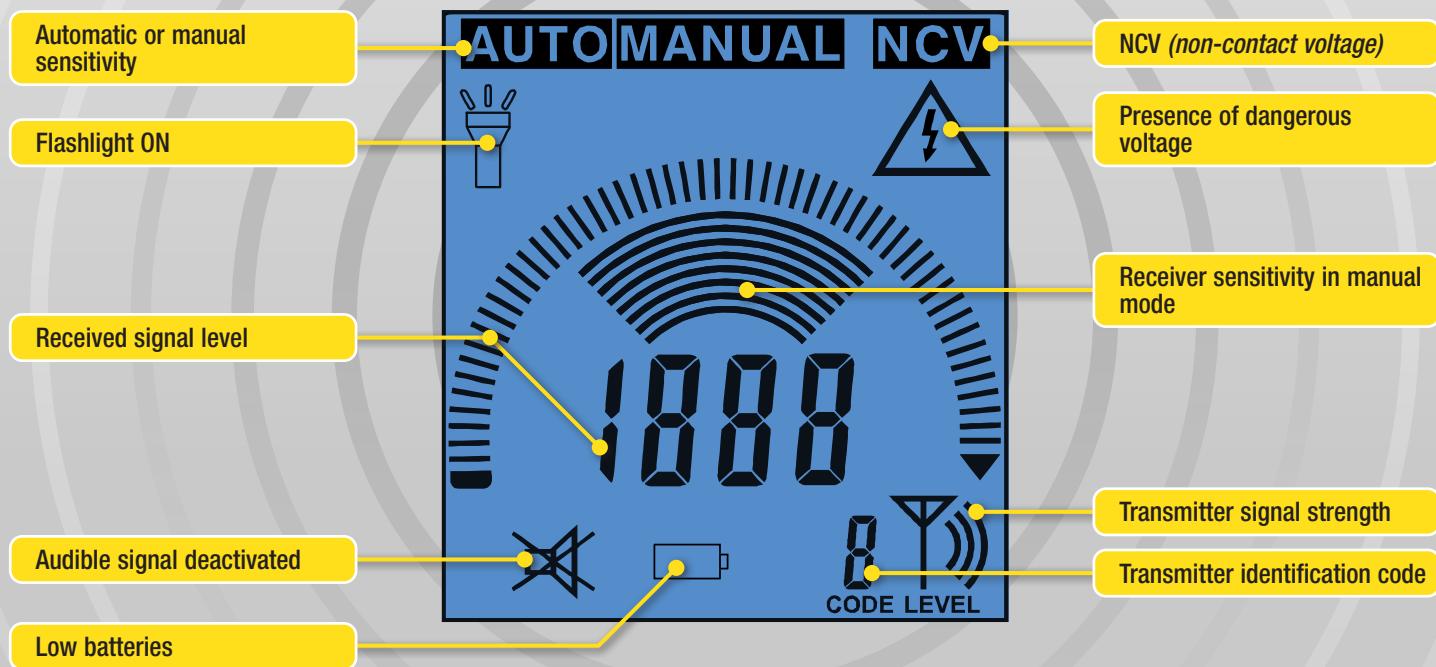

Model 6683

Specifications

300 V
CAT III

CE



MODEL	6683E (TRANSMITTER)
Display	Backlit LCD display
Information Displayed	Measured voltage level, type (AC or DC), transmitted signal power, battery status, identification code, voltage presence
Output Signal Frequency	125 kHz
External Voltage Identification Range	(12, 50, 120, 230) V and 400 V (50/60) Hz or DC \pm 2.5 %
Signal Power	Adjustable (3 levels)
Transmitter Identification	Digital signal coding allowing the use of 7 transmitters simultaneously
Power Supply	(6) 1.5 V AAA batteries
Safety	IEC/EN 61010-2-030 300 V CAT III
Operating / Storage Temperature	Operating Temperature: (32 to 104) °F (0 to 40) °C Storage Temperature: (-4 to 140) °F (-20 to 60) °C
Dimensions / Weight	Dimensions: (6.3 x 3.30 x 1.57) in (160 x 84 x 40) mm; Weight: 12.34 oz (350 g)
MODEL	6683R (RECEIVER)
Display	Backlit LCD display
Information Displayed	Signal amplitude, detection sensitivity, transmitter identification code and transmitted signal strength, battery status, voltage presence
Detection Depth With Transmitter	Unipolar application: (0 to 6) ft (0 to 2) m Bipolar application: (0 to 1.6) ft (0 to 0.5) m Single loopback line: Up to 8.2 ft (2.5 m)
Detection Sensitivity	Automatic or manual adjustment (7 levels)
Non-Contact Voltage (NCV) Function	(12 to 1000) VAC
Other Functions	Flashlight; audible signal deactivation
Power Supply	(6) 1.5 V AAA batteries
Safety	Type F sensor compliant with IEC/EN 61010-031 300 V CAT III
Operating / Storage Temperature	Operating Temperature: (32 to 104) °F (0 to 40) °C Storage Temperature: (-4 to 140) °F (-20 to 60) °C
Dimensions / Weight	Dimensions: (7.8 x 2.63 x 1.42) in (198 x 67 x 36) mm; Weight: 10.93 oz (310 g)

Consult factory for NIST Calibration prices.



 AEMC®
INSTRUMENTS

1.800.561.8187

www.itm.com

information@itm.com

Model 6683

Ordering Information



PRODUCT INCLUDES

Cable Verification & Tracing Analyzer Model 6683. Cat. #2127.89


- ▶ Transmitter and Receiver
- ▶ Soft carrying case
- ▶ Set of (2) 5 ft silicone color-coded (red/black) safety leads with 4 mm straight/right angle banana plugs
- ▶ (2) Alligator clips (red/black)
- ▶ 110 V outlet adapter with banana plugs
- ▶ Mini ground rod
- ▶ E14 bulb adapter
- ▶ (6) 1.5 V AAA (LR03) batteries
- ▶ Multilingual user manual

ACCESSORIES

- ▶ Probe – Black test probe (Rated 1000 V, CAT IV, 15 A, UL V2) Cat. #5000.97
- ▶ Probe – Red test probe (Rated 1000 V, CAT IV, 15 A, UL V2) Cat. #5000.98

REPLACEMENT PARTS

- ▶ Adapter – 110 V outlet with 4 mm banana plugs Cat. #2118.49
- ▶ Lead – Set of (2) 5 ft silicone color-coded (red/black) with 4 mm straight/right angle banana plugs (Rated 1000 V, CAT IV, UL) Cat. #5000.94
- ▶ Clip – Safety alligator – Black (1000 V, CAT IV, 15 A, UL V2) Cat. #5000.99
- ▶ Clip – Safety alligator – Red (1000 V, CAT IV, 15 A, UL V2) Cat. #5100.00
- ▶ Mini ground rod for use with Models 6681 & 6683 Cat. #5100.22
- ▶ Adapter – E14 Bulb adapter for use with Model 6683 Cat. #5100.23
- ▶ Case – Replacement soft carrying case for Model 6683 Cat. #5100.24

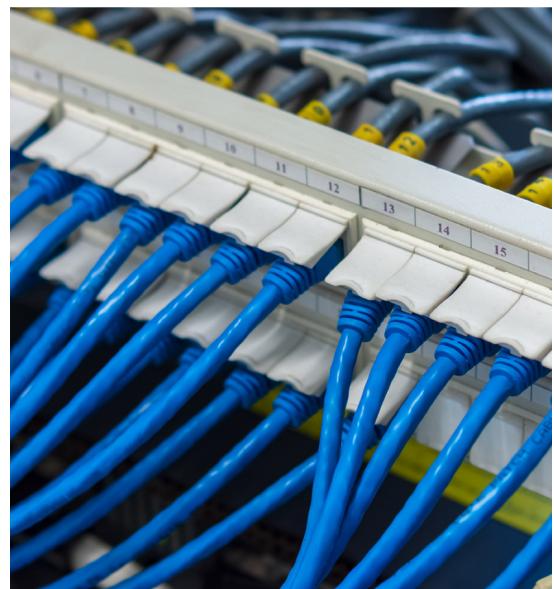



AEMC[®]
INSTRUMENTS
CHAUVIN ARNOUX GROUP



**CHAUVIN
ARNOUX**



Family of Products

Engineered for Excellence
BUILT TO LAST[™]