
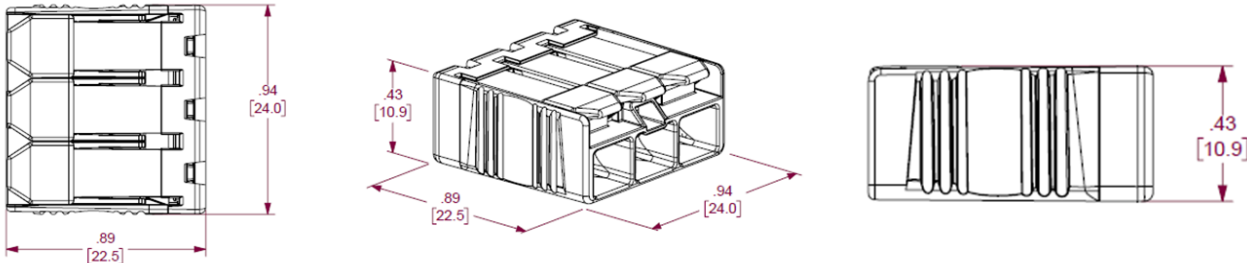
	MODEL L32, L33, & L35	 LEVER CONNECTORS		
FEATURES/BENEFITS:				
<ul style="list-style-type: none"><li>• 10 AWG Solid/Stranded capability for high current applications</li><li>• 2-, 3-, &amp; 5-Port options to address just about any application</li><li>• Low lever force may reduce risk of repetitive trauma injury</li><li>• Wide wire range for easy installation at pre-fabrication and in field</li><li>• Clear housing enables easy verification of connection</li><li>• Ground rating eliminates need for special "ground" connector</li></ul>				
ELECTRICAL:		MECHANICAL:		
VOLTAGE:		Compact size to fit into confined junction boxes Wide levers ease actuation Profiled housing for improved grip Reusable solid and stranded wire		
General: 600V Max.				
Signs/Luminaires: 1000V Max.				
AMPERAGE: 30A (41A IEC 60998)				
PHYSICAL:		STANDARDS & SPECIFICATIONS:		
HOUSING: PC (Transparent)		UL/cUL 486C, 467 Grounding - E5238		
LEVERS: Nylon		CE Certified		
Contacts: Copper		IEC/EN 60998		
Plating: Tin		RoHS Compliant		
Temperature: 105°C (221°F)		UKCA		
Strip Length: 0.47"-0.55" (12-14mm)		UL 94 V2 Flame Rating		
Color: Blue/Transparent				
WIRE RANGE:				
Conductor Type: AWG		STRIP LENGTH		
Copper (Solid & Stranded)	22 - 10 AWG (0.5-6mm <sup>2</sup> )	0.47"-0.55" (12-14mm)		
Solid Copper-Clad Aluminum	12 - 10 AWG			
Stranded Copper Tin Bonded	22 - 10 AWG			
Listed for use with Cu AND CC-Cu. Do not use on Aluminum.				
DIMENSIONS:				
				
ORDERING INFO:				
Catalog #	Model	Ports	Quantity	Weight Lbs. (Kg)
30-16L32	L32	2	Box of 1,000	8.11 (3.67)
30-16L33	L33	3	Box of 1,000	11.51 (5.22)
30-16L35	L35	5	Box of 500	9.44 (4.28)
FACTORY CONTACT:			NOTES:	

REVISED: August 2024

REVISED: August 2024