# AOS Absolute Digimatic Caliper CD-AX/APX Series



**Bulletin No. 2129** 

A new series of digimatic calipers derived from 30 years of accumulated Mitutoyo technologies. Equipped with the electromagnetic induction type absolute encoder and AOS (Advanced Onsite Sensor) applied for ABS coolant-proof calipers.

- Patent registered (in Japan, USA, China, Germany, UK, France, Switzerland and India)
- Design patent pending (in Japan, USA, EU and China)






### **AOS Absolute Digimatic Caliper**

A new series of digimatic calipers derived from 30 years of accumul induction type absolute encoder and AOS (Advanced Onsite Sensor) a



## ated Mitutoyo technologies. Equipped with the electromagnetic applied for ABS coolant-proof calipers.

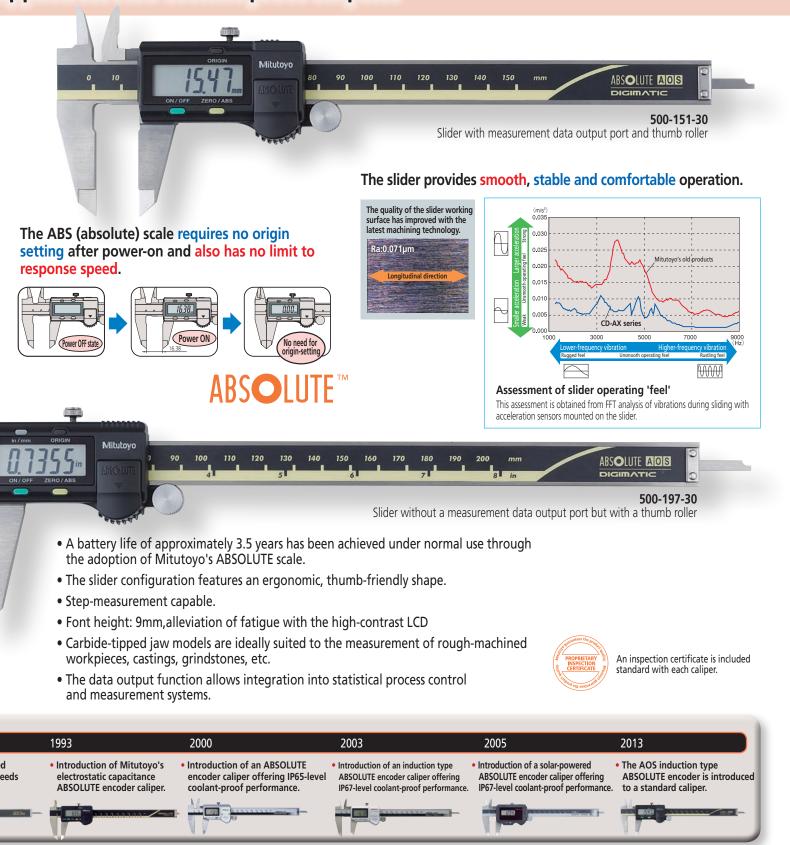

#### **Common Specifications**

- Resolution: 0.01mm
- Repeatability: 0.01mm
- Power supply: Button-type silver oxide battery SR44 (No. 938882), 1 piece supplied as standard (The standard supplied battery is for the monitor.)
- Battery life: Approx. 3.5 years under normal use
- Maximum response speed: Unlimited

#### **Functions**

#### ABS (absolute) measurement function:

Enables absolute-mode measurement to be started without any zero-setting after switch-on. The absolute origin position can be set, or reset, with the ORIGIN switch at any time.

#### INC (incremental) measurement function:

Enables the display value to be set to zero, temporarily, at the current slider position to enable easy incremental-mode measurement.

#### Low battery alarm:

Indicates (with a 'B' symbol in the display) that the battery needs replacing. This allows timely battery replacement before the caliper becomes unusable.

#### **External output function:**

Allows measurement data to be exported using the optional data cable.

#### **Hold function:**


Allows a display value to be held using the optional Data Hold unit. (This function cannot be used along with the external output function.)

#### **SPECIFICATIONS**

Metric	ı					
Order No.	Range	Accuracy	Mass	Measurement data output port	Thumb roller	Remarks
500-150-30	0-100mm	±0.02mm	143 g	<b>✓</b>	<b>✓</b>	Depth bar ø1.9mm rod
500-180-30				-	-	Deptil bar Ø1.9min rod
500-151-30	0-150mm		168 g	V	V	-
500-154-30						Carbide-tipped jaws for outside measurement
500-155-30						Carbide-tipped jaws for outside and inside measurement
500-158-30						Depth bar ø1.9mm rod
500-181-30				-	-	-
500-152-30	0-200mm		198 g	~	V	-
500-156-30						Carbide-tipped jaws for outside measurement
500-157-30						Carbide-tipped jaws for outside and inside measurement
500-182-30				_	-	-

incn						
Order No.	Range	Accuracy	Mass	Measurement data output port	Thumb roller	Remarks
500-170-30	0-4"	±0.001"	143 g	<b>✓</b>		Depth bar ø3/40" rod
500-195-30				_		
500-171-30	0-6"		168 g	~		-
500-174-30						Carbide-tipped jaws for outside measurement
500-175-30						Carbide-tipped jaws for outside and inside measurement
500-178-30						Depth bar ø3/40" rod
500-196-30				-		-
500-159-30						Carbide-tipped jaws for outside measurement
500-160-30						Carbide-tipped jaws for outside and inside measurement
500-172-30	0-8"		198 g	~		-
500-176-30						Carbide-tipped jaws for outside measurement
500-177-30						Carbide-tipped jaws for outside and inside measurement
500-197-30				-		-
500-163-30						Carbide-tipped jaws for outside measurement
500-164-30						Carbide-tipped jaws for outside and inside measurement


#### **External View/Dimensions Chart**

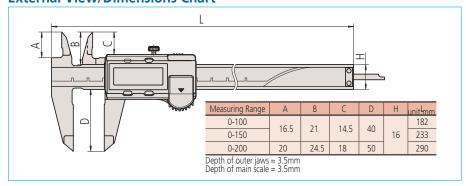

**Optional Accessories** These accessories are available only for those models with the measurement data output function.

 Data Hold unit Order No.959143





• USB direct input tool
USB-ITN-C (2m): Order No.06ADV380C

#### Connecting cable

Used for input tool DP-1VR or MUX-10F.

1m cable: Order No.959149 2m cable: Order No.959150



U-WAVE-T dedicated connecting cable
 Cable for standard use: Order No.02AZD790C
 Cable for foot switch: Order No.02AZE140C

**Note:** All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this printed matter as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. In addition, the latest applicable version of our General Trading Conditions will apply. Only quotations submitted by ourselves may be regarded as definitive.

Mitutoyo products are subject to US Export Administration Regulations (EAR). Re-export or relocation of our products may require prior approval by an appropriate governing authority.

#### **Trademarks and Registrations**

Designations used by companies to distinguish their products are often claimed as trademarks. In all instances where Mitutoyo America Corporation is aware of a claim, the product names appear in initial capital or all capital letters. The appropriate companies should be contacted for more complete trademark and registration information.



