

NON-CONTACT VOLTAGE TESTERS

DETECT PRESENCE OF AC VOLTAGE

- Four new NCVT's
- UL Listed
- CAT IV 1000V AC & CAT IV 600V AC models
- Dual and Single Range Models
- IP67 Dust Tight/Water Immersion Protection* (61-657 & 61-647)
- 2 Meter drop protection (61-657 & 61-647)
- Bright LED forward facing flashlight (3 models)



BUILT-IN
FLASHLIGHT

BUILT-IN
FLASHLIGHT

BUILT-IN
FLASHLIGHT



61-657
Dual Range
12 to 1000V AC
NCVT w/Flashlight
CAT IV 1000V




61-647
Single Range
50 to 1000V AC
NCVT w/Flashlight
CAT IV 1000V



61-637
Single Range
24 to 600V AC
NCVT w/Flashlight
CAT IV 600V



61-627
Single Range
50 to 600V AC
NCVT
CAT IV 600V

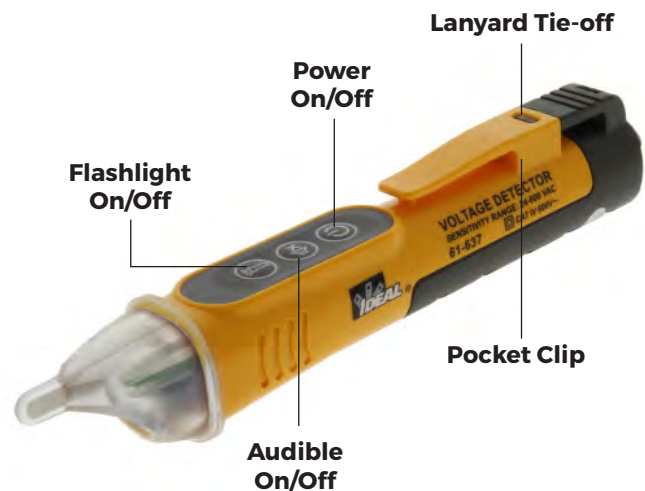


*Protection against the effects of water immersion in water between 5.9 in. (15cm) and 39.37 (1m) for 30 minutes.

NON-CONTACT VOLTAGE TESTERS

DETECT PRESENCE OF AC VOLTAGE

NON-CONTACT VOLTAGE TESTER SELECTION GUIDE	FOUR NEW NCVTs			
	 NEW	 NEW	 NEW	 NEW
FEATURES	61-657	61-647	61-637	61-627
CAT Rating (Safety)	CAT IV 1000V	CAT IV 1000V	CAT IV 600V	CAT IV 600V
Listing	cULus, CE, RCM	cULus, CE, RCM	cULus, CE, RCM	cULus, CE, RCM
Voltage Sensing Range	12 ~ 1000V AC	50 ~ 1000V AC	24 ~ 600V AC	50 ~ 600V AC
Dual Range	✓	—	—	—
Flashlight	✓	✓	✓	—
Drop Protection	6.6 ft. (2m)	6.6 ft. (2m)	3.3 ft. (1m)	3.3 ft. (1m)
Ingress Protection	IP67	IP67	—	—
Dual Range Sensitivity	✓	—	—	—
Audible Indication	✓	✓	✓	✓
Audible Defeat	✓	✓	✓	—
Visual Indication	Green On, Flashing Red	Green On, Flashing Red	Green On, Flashing Red	Green On, Flashing Red
Visual Range Indicator	Blue Low, Red High	—	—	—
Lanyard Compatible	✓	✓	✓	✓
Auto-Power Off (APO)	✓	✓	✓	✓
Low Battery Indication	✓	✓	✓	✓
Battery Type (Included)	2 x 1.5V AAA	2 x 1.5V AAA	2 x 1.5V AAA	2 x 1.5V AAA
Warranty	2-Year	2-Year	2-Year	2-Year




**Detects AC voltage
at outlets**
(including TR's
w/61-657)



**Detects AC voltage
on conductors**



**Detects AC voltage
at panels**



**2 x 1.5V AAA
Batteries**
(Included)



IDEAL INDUSTRIES, INC.