

P/N: 61201-1203

Copyright

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: 61201-1203
Commit: 35207
Language: en-US
Modified: 2016-04-27
Formatted: 2018-11-21



General description

The main purpose of the housing on the FLIR A315f is to increase the environmental specification of the standard FLIR A315 to IP66 without affecting any of the features available in the camera itself.

The built-in FLIR A315 camera has features and functions that make it the natural choice for anyone who uses PC software to solve problems and for whom 320 × 240 pixel resolution is sufficient. Among its main features are GigE Vision and GenICam compliance, which makes it plug-and-play when used with software packages such as IMAQ Vision and Halcon.

Key features:

- Encapsulation to IP66.
- Affordable.
- GigE compliant.
- GenICam compliant.
- Trigg/synchronization/GPIO.
- 16-bit 320 × 240 pixel images at 60 Hz, signal, temperature linear, and radiometric.
- Compliant with any software that supports GenICam, including National Instruments IMAQ Vision and Stemmers Common Vision Blox.

Typical applications:

- High-end infrared machine vision that needs temperature measurement.
- Slag detection.
- Food processing.
- Electronics testing.
- Power resistor testing.
- Automotive.

Imaging and optical data

IR resolution	320 × 240 pixels
Thermal sensitivity/NETD	< 0.05°C @ +30°C (+86°F) / 50 mK
Field of view (FOV)	25° × 18.8°
Minimum focus distance	0.4 m (1.31 ft.)
Focal length	18 mm (0.7 in.)
Spatial resolution (IFOV)	1.36 mrad
Lens identification	Automatic
F-number	1.3
Image frequency	60 Hz
Focus	Automatic or manual (built in motor)

Detector data

Detector type	Focal plane array (FPA), uncooled microbolometer
Spectral range	7.5–13 μm

Detector data	
Detector pitch	25 µm
Detector time constant	Typical 12 ms
Measurement	
Object temperature range	• -20 to +120°C (-4 to +248°F) • 0 to +350°C (+32 to +662°F)
Accuracy	±4°C (±7.2°F) or ±4% of reading
Measurement analysis	
Atmospheric transmission correction	Automatic, based on inputs for distance, atmospheric temperature and relative humidity
Optics transmission correction	Automatic, based on signals from internal sensors
Emissivity correction	Variable from 0.01 to 1.0
Reflected apparent temperature correction	Automatic, based on input of reflected temperature
External optics/windows correction	Automatic, based on input of optics/window transmission and temperature
Measurement corrections	Global object parameters
Ethernet	
Ethernet	Control and image
Ethernet, type	Gigabit Ethernet
Ethernet, standard	IEEE 802.3
Ethernet, connector type	RJ-45
Ethernet, communication	TCP/IP socket-based FLIR proprietary and GenICam protocol
Ethernet, image streaming	16-bit 320 × 240 pixels @ 60 Hz - Signal linear - Temperature linear - Radiometric GigE Vision and GenICam compatible
Ethernet, protocols	TCP, UDP, SNMP, RTSP, RTP, HTTP, ICMP, IGMP, ftp, SMTP, SMB (CIFS), DHCP, MDNS (Bonjour), uPnP
Digital input/output	
Digital input, purpose	Image tag (start, stop, general), Image flow control, (stream on/off), Input ext. device (programmatically read)
Digital input	2 opto-isolated, 10–30 VDC
Digital output, purpose	Output to ext. device (programmatically set)
Digital output	2 opto-isolated, 10–30 VDC, max. 100 mA
Digital I/O, isolation voltage	500 VRMS
Digital I/O, supply voltage	12/24 VDC, max. 200 mA
Digital I/O, connector type	6-pole jackable screw terminal



FLIR A315f 25°

Power system	
External power operation	The camera operates on 12/24 VDC, 9 W max. (allowed range: 10-30 VDC) and heaters on 24 VDC, 25 W max. In total: 34 W.
External power, connector type	2-pole jackable screw terminal
Voltage	Allowed range 10–30 VDC
Environmental data	
Operating temperature range	–25°C to +50°C (–13°F to +122°F)
Storage temperature range	–40°C to +70°C (–40°F to +158°F)
Humidity (operating and storage)	IEC 60068-2-30/24 h 95% relative humidity +25° C to +40°C (+77°F to +104°F)
EMC	• EN 61000-6-2 (Immunity) • EN 61000-6-3 (Emission) • FCC 47 CFR Part 15 Class B (Emission)
Encapsulation	IP 66 (IEC 60529)
Bump	5 g, 11 ms (IEC 60068-2-27)
Vibration	2 g (IEC 60068-2-6)
Physical data	
Weight	5 kg (11.0 lb.)
Size (L × W × H)	460 × 140 × 159 mm (18.1 × 5.5 × 6.3 in.)
Base mounting	
Housing material	Aluminum
System features	
External power operation (heater)	24 VDC, 25 W max.
External power, connector type (heater)	2-pole jackable screw terminal
Voltage (heater)	Allowed range 21-30 VDC
Automatic heaters	Clears window from ice
Shipping information	
Packaging, type	Cardboard box
List of contents	• Infrared camera with lens and environmental housing • FLIR Sensors Manager download card • FLIR Tools & Utilities CD-ROM • Lens cap • Printed documentation • Small accessories kit
Packaging, weight	
Packaging, size	534 × 207 × 230 mm (21.0 × 8.1 × 9.1 in.)
EAN-13	7332558006153
UPC-12	845188006464
Country of origin	Sweden

Supplies & accessories:

- T129252; Special temperature range -20 to +700 deg C
- T129253; Special temperature range -20 to +500 deg C
- T129254; High temperature measurement option -20 to +2000 deg C
- T130151; Special temperature range -20 to +2000 deg C
- T130152; Special temperature range +200 to +1200 deg C

1.800.561.8187



www.itm.com

information@itm.com



FLIR A315f 25°

-
- T911803; Power supply, 24 VDC, 2 A, 50 W
 - T951004ACC; Ethernet cable CAT6, 2 m/6.6 ft.
 - 1910586ACC; Power cable, pigtailed
 - T129785ACC; Dust control ring
 - T199721; ThermoVision EFD, max. 1 camera
 - T199722; ThermoVision EFD, max. 2 cameras
 - T199723; ThermoVision EFD, max. 3 cameras
 - T199724; ThermoVision EFD, max. 4 cameras
 - 324-0004-00; HARD CASE - WITH FOAM, F - SERIES
 - 500-1120-00; Pedestal Mount Assy, f series
 - 500-1121-00; Small Pole Adapter Assy, f series
 - 500-1123-00; Wall Mount Assy, f series
 - T198584; FLIR Tools
 - T198583; FLIR Tools+ (download card incl. license key)
 - APP-10002; FLIR Tools Mobile (Android Application)
 - T199233; FLIR Atlas SDK for .NET
 - T199234; FLIR Atlas SDK for MATLAB
 - T198567; ThermoVision™ System Developers Kit Ver. 2.6
 - T198566; ThermoVision™ LabVIEW® Digital Toolkit Ver. 3.3
 - INST-EW-0155; Extended Warranty 1 Year for A3xxf, T540, T600/bx, T610
 - INST-EWGM-0175; Premium Service Package for A310ex, A3xxf, A6xx, T620-T660
 - INST-GM-0155; General Maintenance Package for A3xxf, A310ex, A310pt, A6xx

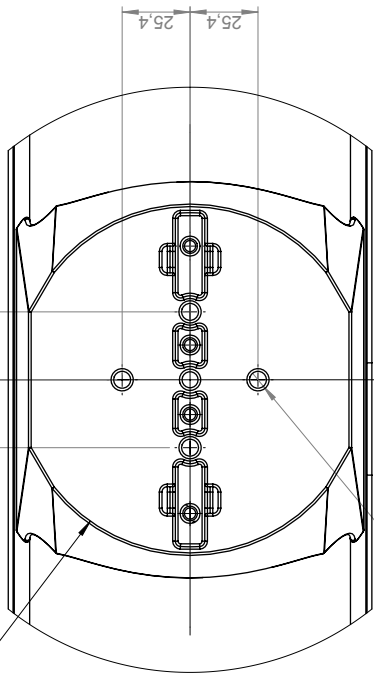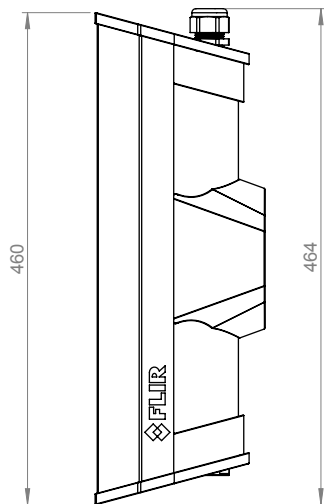

DETAIL A
SCALE 1:2

5x 1/4 - 20 ∇ 19 mm






Konstruktør/Drawn	H. ØSTLING	Datum/Date	2011-11-25	Kontroll/Check	HAOS	Material	-
Ändrad and/Modified by	H. ØSTLING	Ändrad/Modified	2011-11-28	Ytjärnsmått/Roughness	Ra	Ytbehandling/Surface treatment	-
Där ej annat anges/Unless otherwise stated		Benämning/Denomination					
Gen för ISO 2768-mK		Blad/Sheet 1(1)					
Ölning ut/Excerpt from ISO 2768-m		Storlek/Size A3					
0,5-6 +0,1 (6)-30 +0,2 (30)-100 +0,5 (100)-400 +0,8 (400)-1000		Rev A					
Hållskadad Flät rad Kanter bruna Ecken bröna		Ritn nr/Drawing No. T127376					

1.800.561.8187

www.itm.com

information@itm.com

Camera with built-in IR lens f=18 mm (25°)

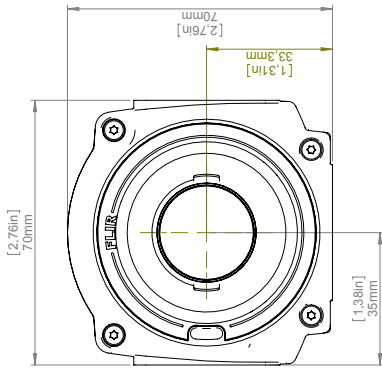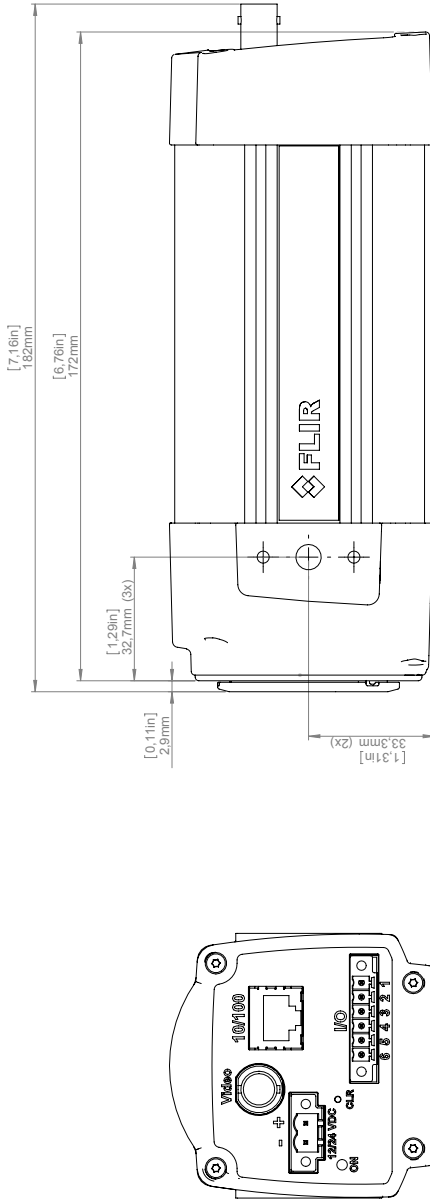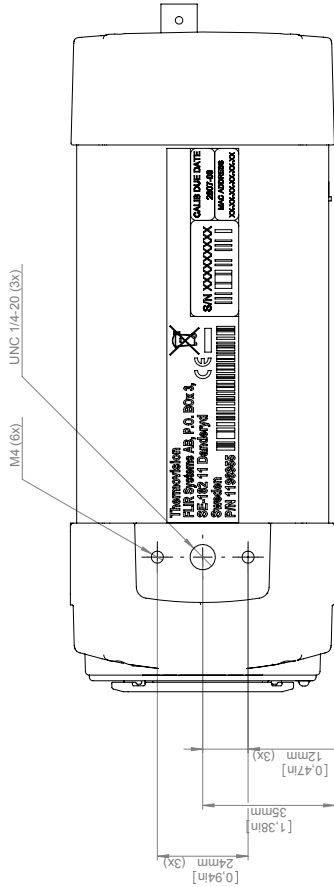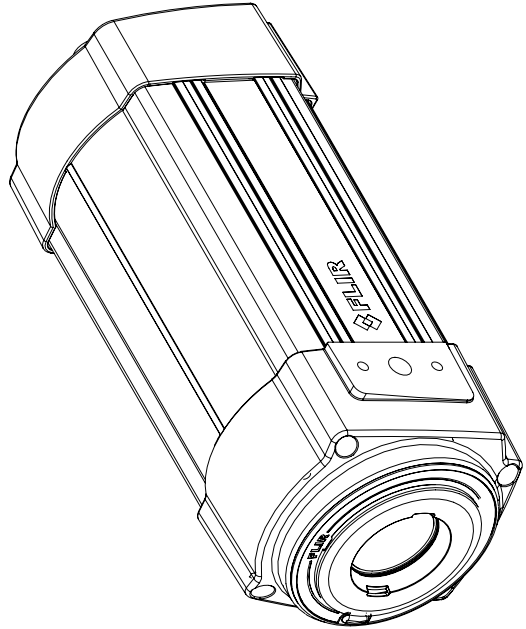

Modified
2012-04-18
Denomination

Checked
CAHA

Drawn by
R&D Thermography

Size
A3

Scale
1:1

Sheet
1(8)

Size
1125002

Basic dimensions FLIR A3xx/SC3xx


Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply.

1.800.561.8187

www.itm.com

information@itm.com

Camera with Lens IR f=4 mm (90°) incl support

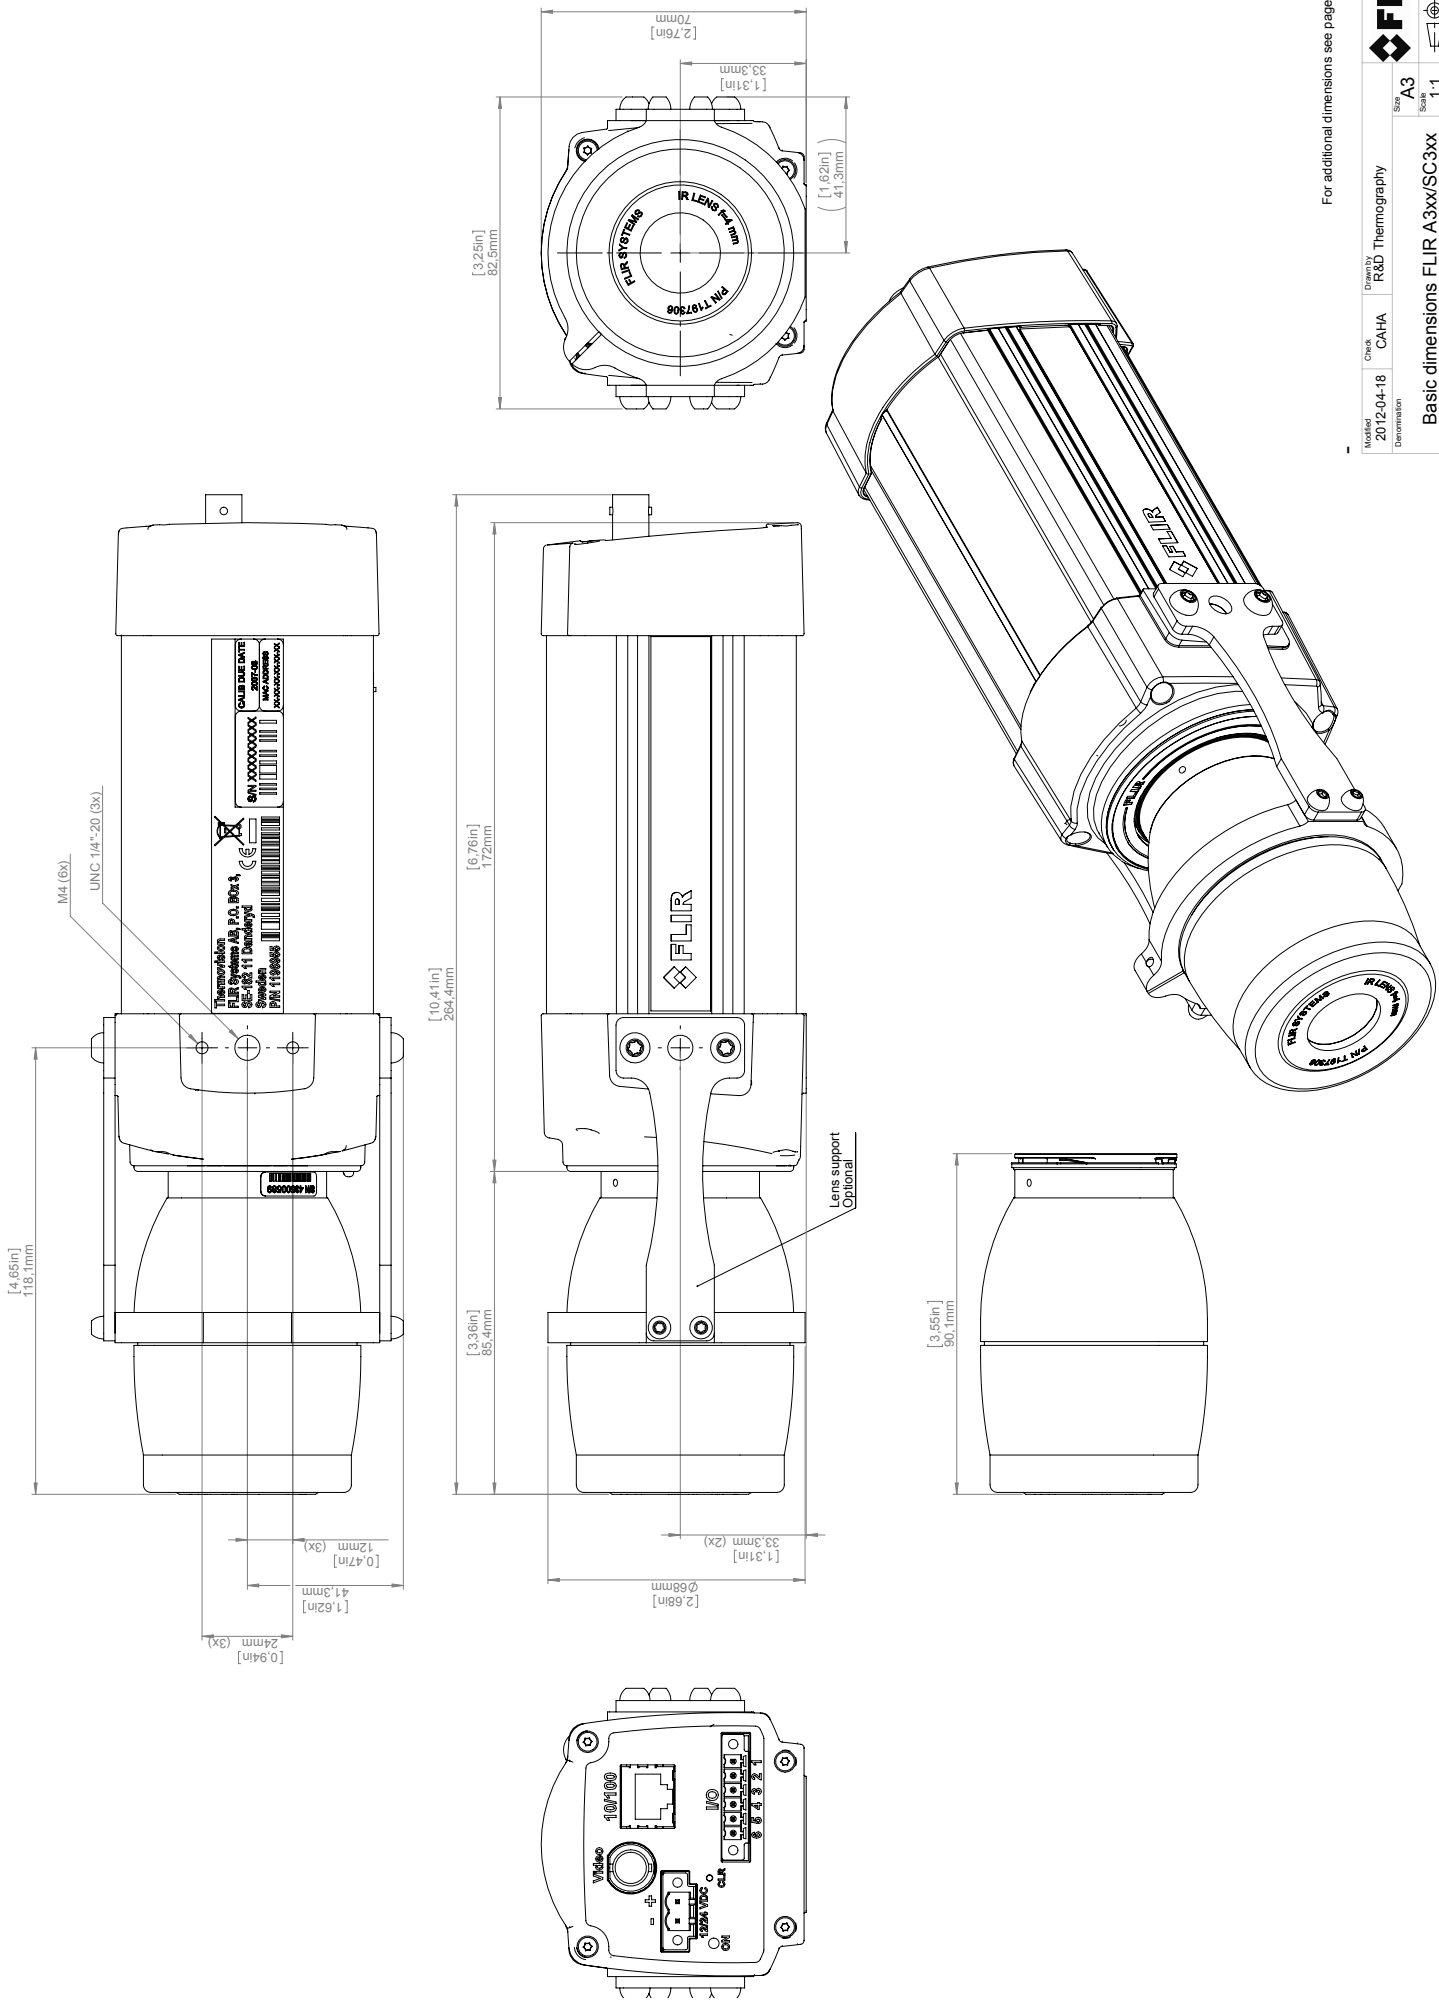

For additional dimensions see page 1

Modified	2012-04-18	Check	CAHA	Drawn by	R&D Thermography	Size	A3	Scale	1:1	Sheet	2(8)	Size	A
Basic dimensions FLIR A3xx/SC3xx													
Drawing No. T125002													








Product may be subject to US Export Regulations. No part of this drawing may be reproduced, stored in a retrieval system or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. All rights reserved worldwide. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

1.800.561.8187

www.itm.com

information@itm.com

Camera with Lens IR f=10 mm (45°)


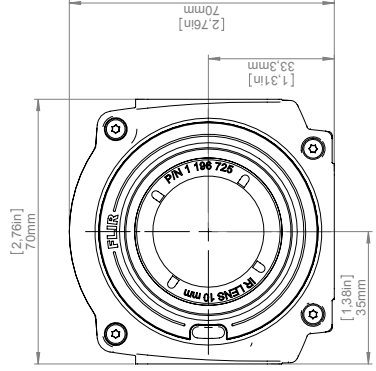

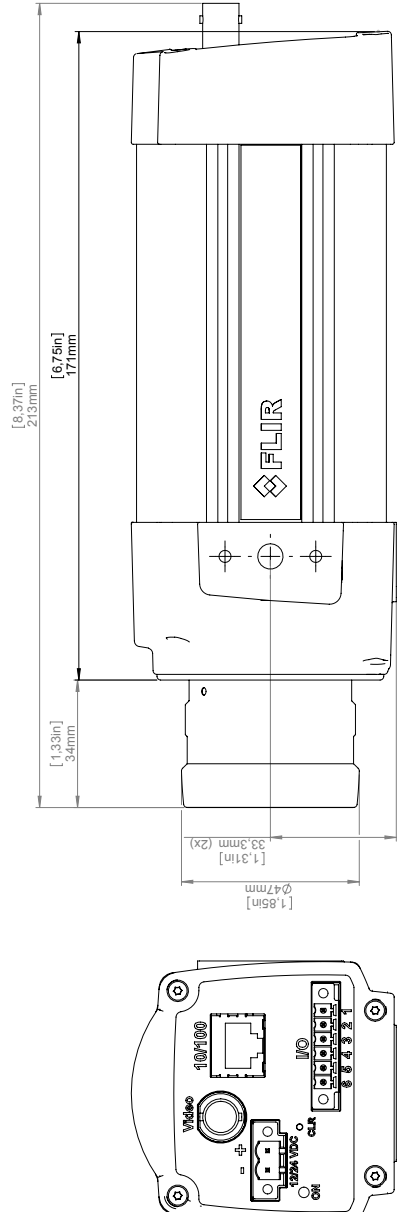
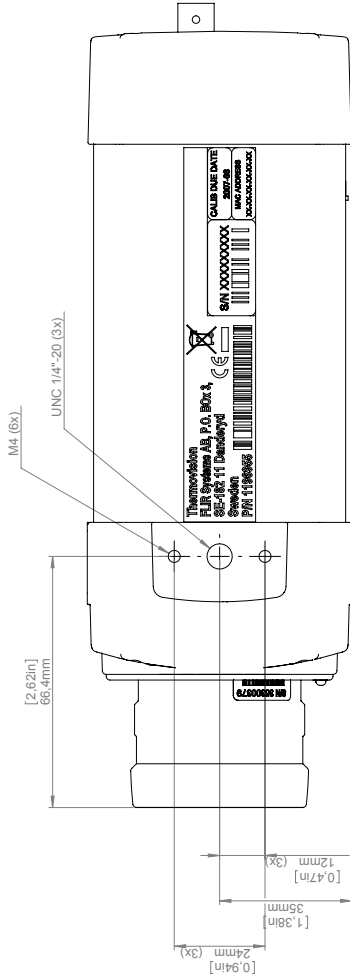
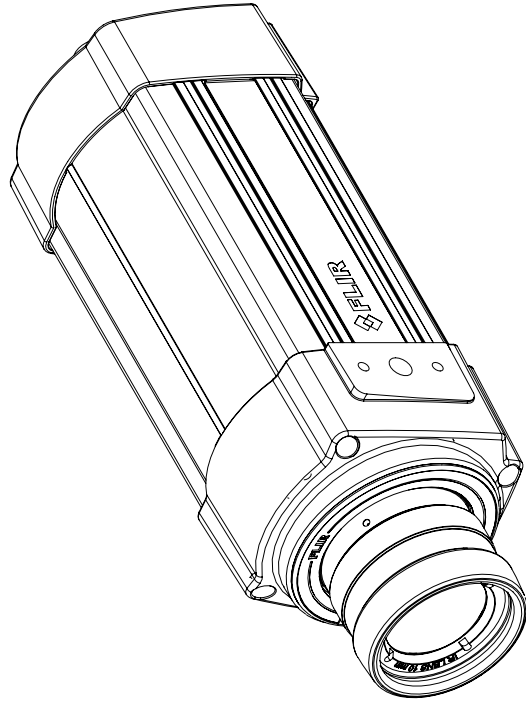


For additional dimensions see page 1

Modified 2012-04-18	Check CAHA	Drawn by R&D Thermography	Size A3	Scale 1:1	Sheet 3(8)	Size T125002	A
Basic dimensions FLIR A3xx/SC3xx							

© 2012 FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

Camera with Lens IR f=30 mm (15°)

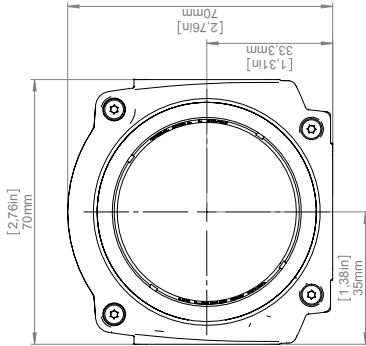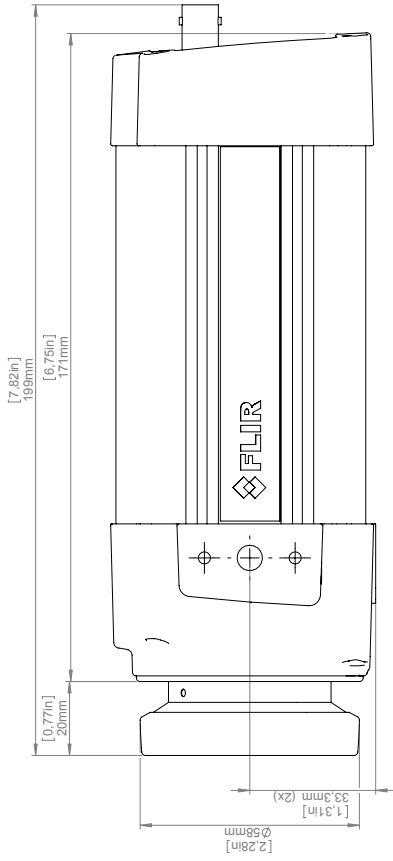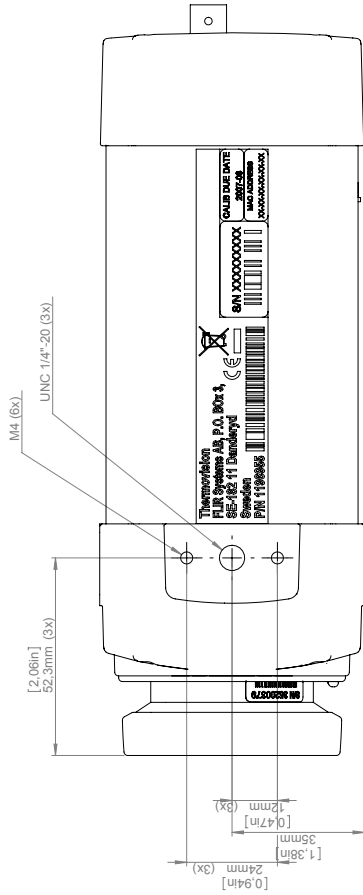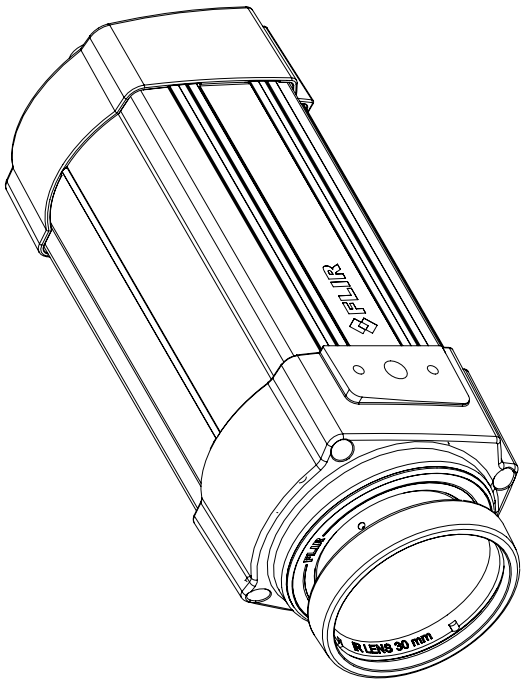

For additional dimensions see page 1

Modified 2012-04-18	Check CAHA	Drawn by R&D Thermography	Size A3	Scale 1:1	Sheet 4(8)	Size A
Basic dimensions FLIR A3xx/SC3xx			Drawing No. T125002			








mera with Lens IR f=76 mm (6°) incl support

1.800.561.8187


www.itn.com

information@itm.com

© 2012 CLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from CLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@clir.com with any questions. Dimensional conformity to US law is prohibited.

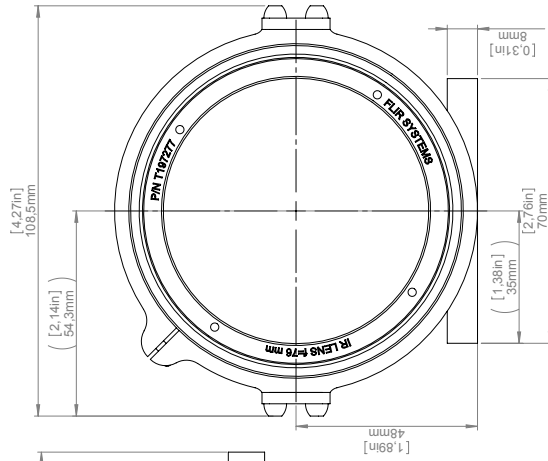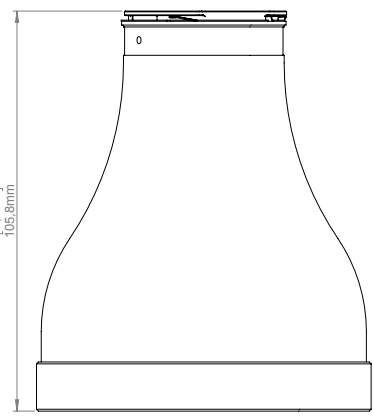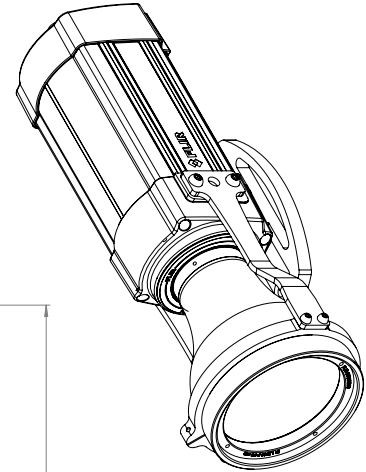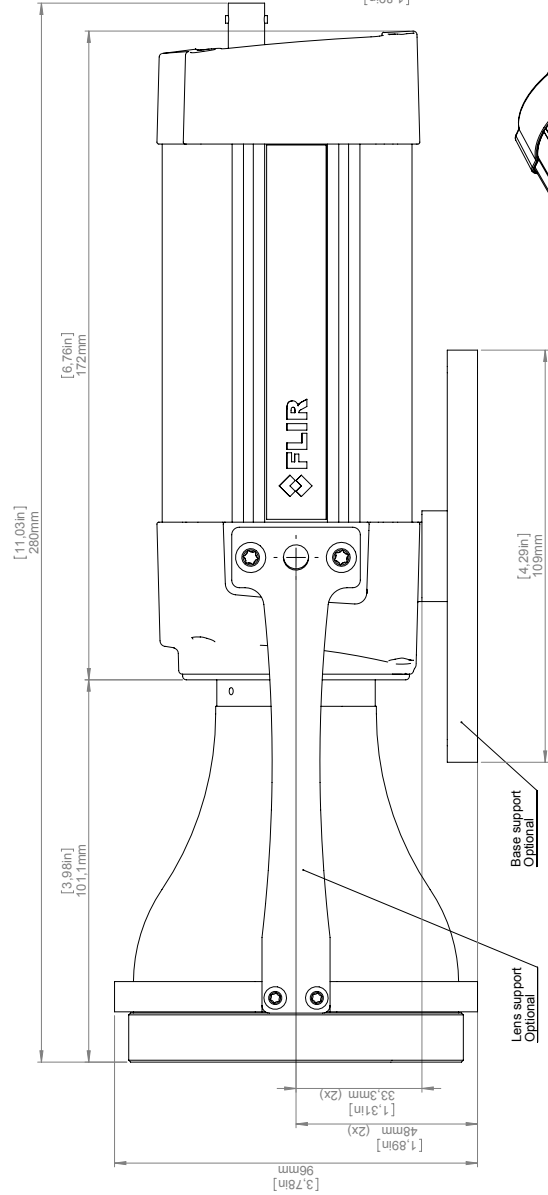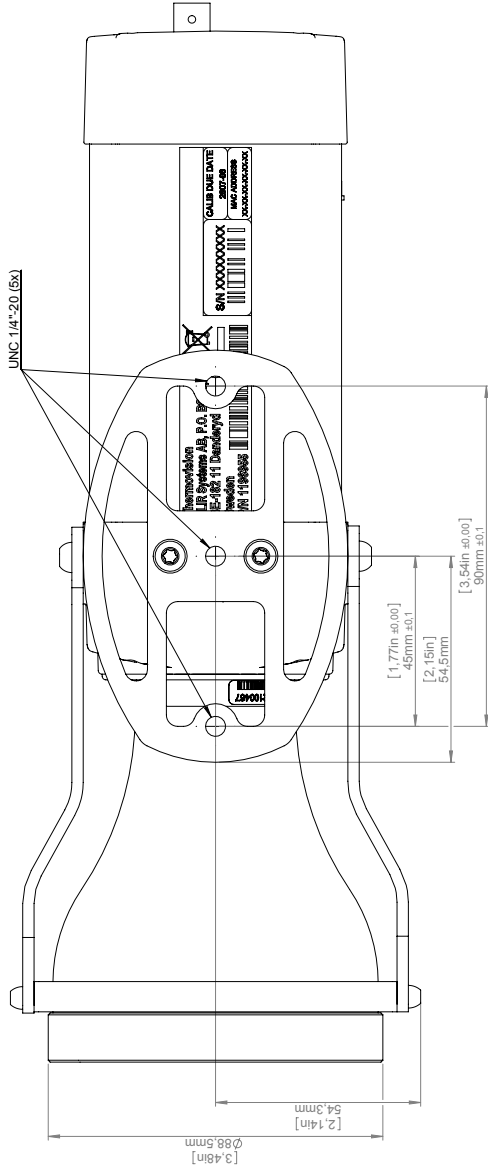

For additional dimensions see page 1




1.800.561.8187

www.itm.com

information@itm.com

mera with Close-up lens 1X (25 µm) incl support

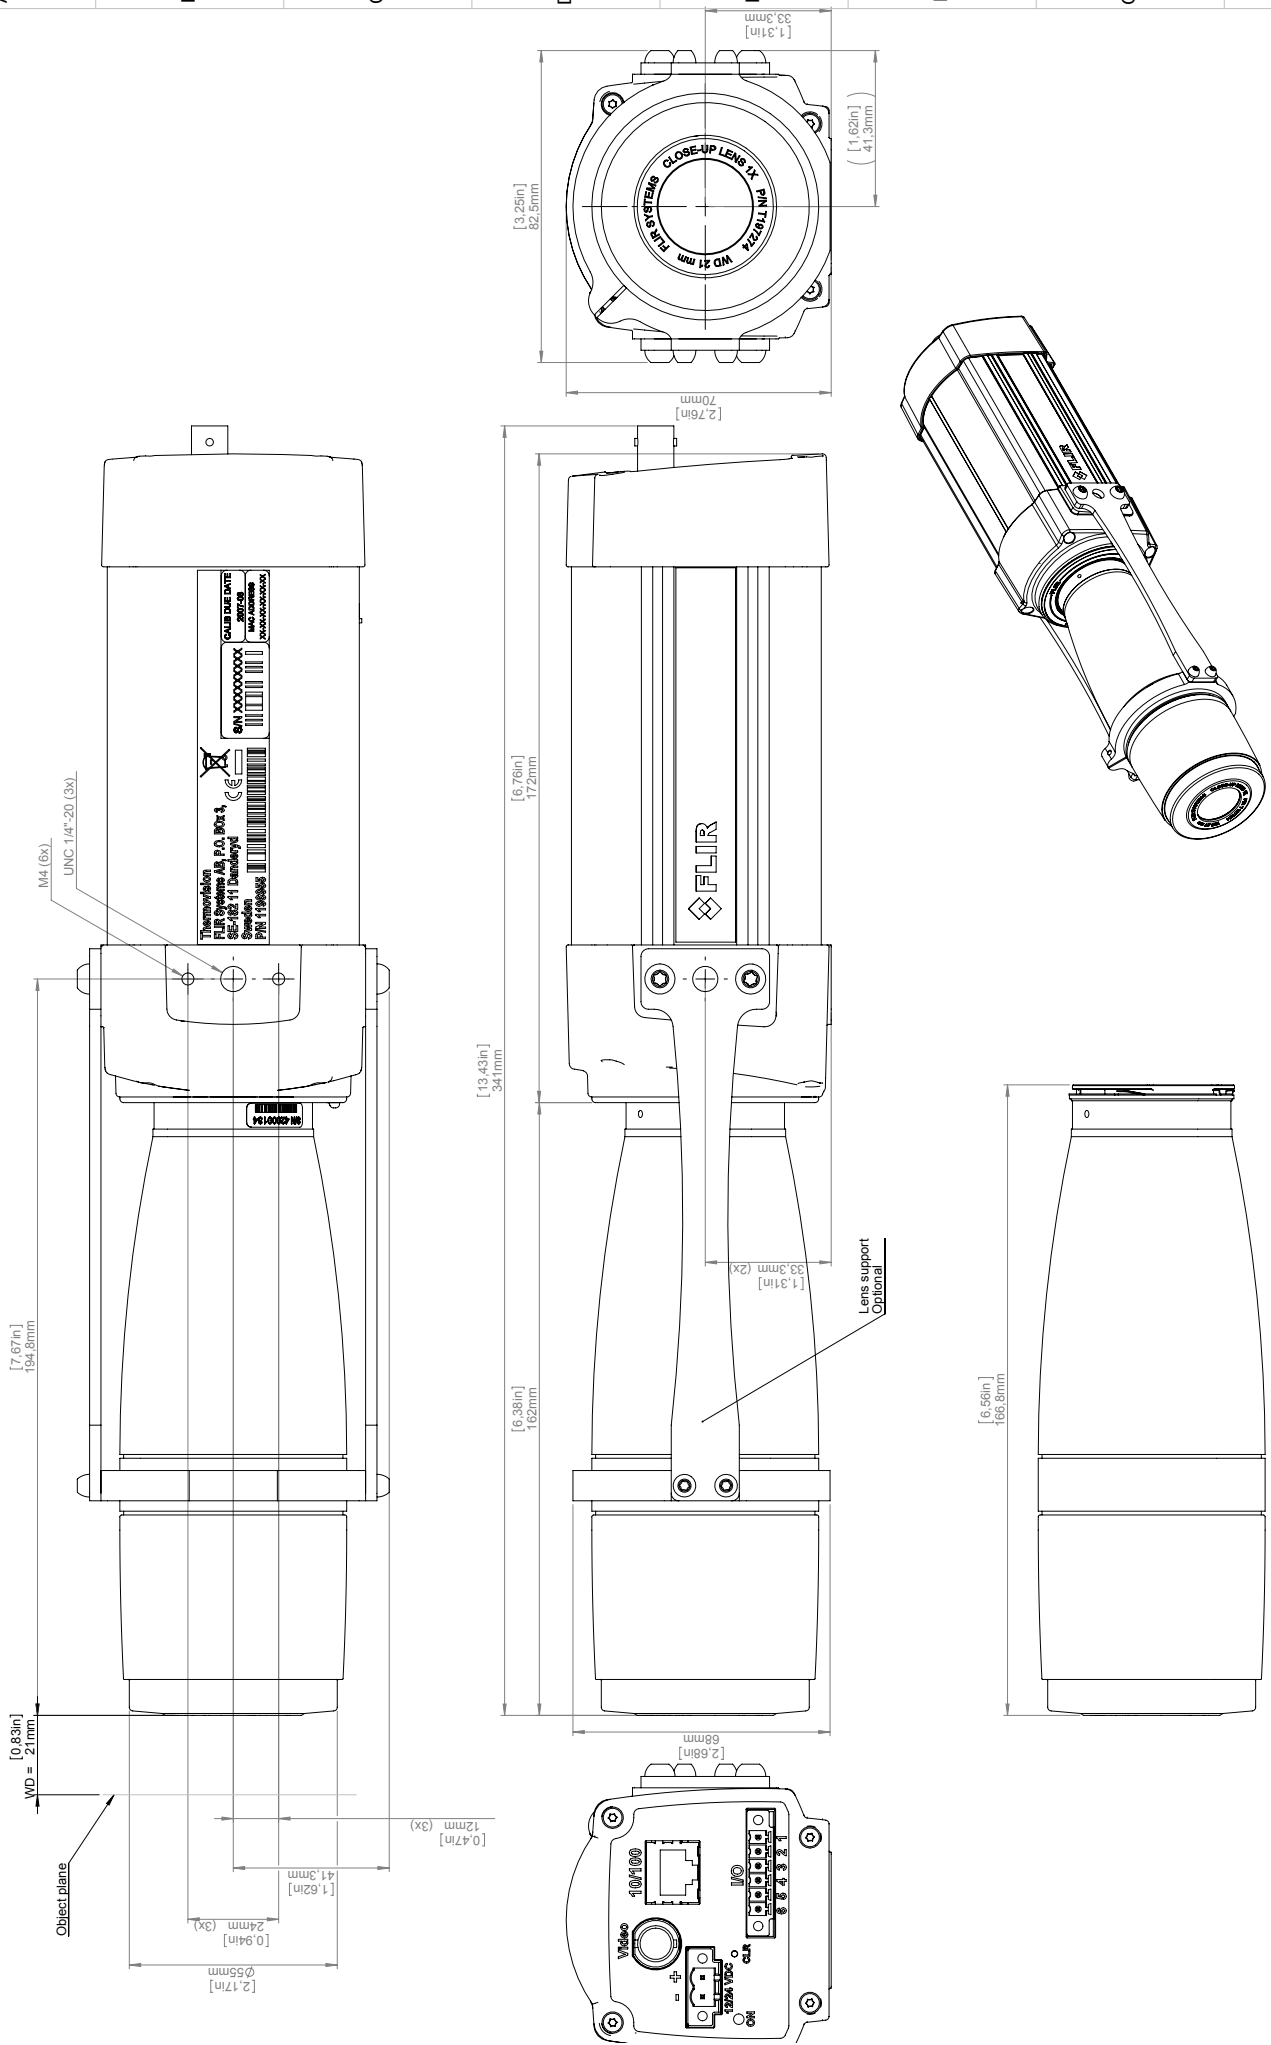

For additional dimensions see page 1






Modified	2012-04-18	Check	CAHA	Drawn by	R&D Thermography	Size	A3	Scale	1:1	Rev	6(8)	Size	A
Denotation												Drawing No.	T125002
Basic dimensions FLIR A3xx/SC3xx													

1.800.561.8187

www.itm.com

information@itm.com

Camera with Close-up lens 2X (50 µm)

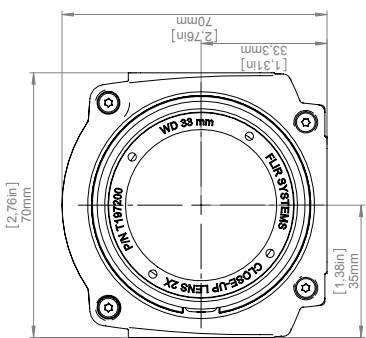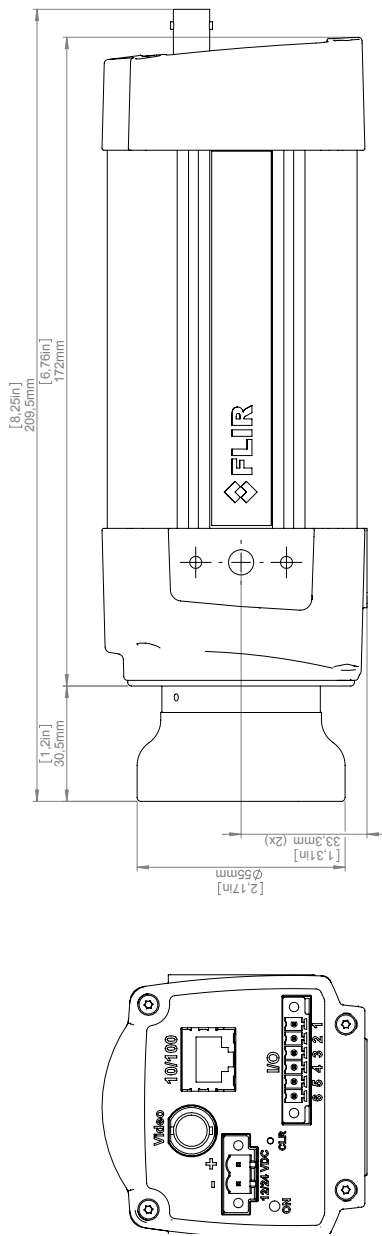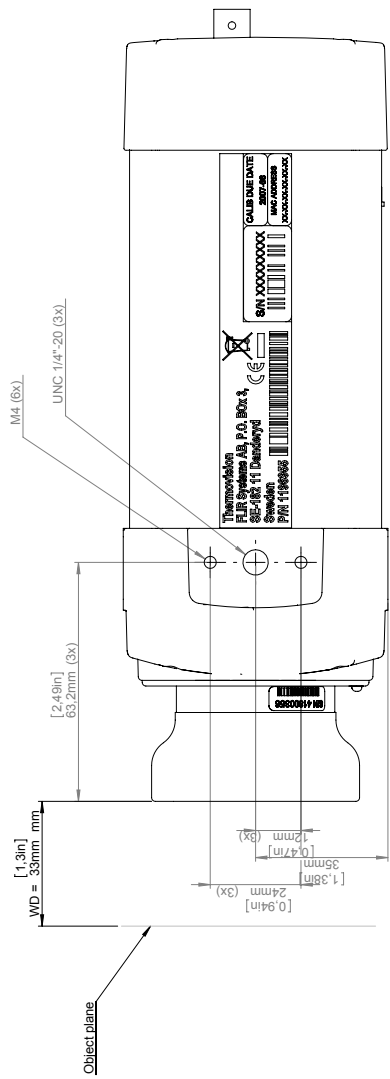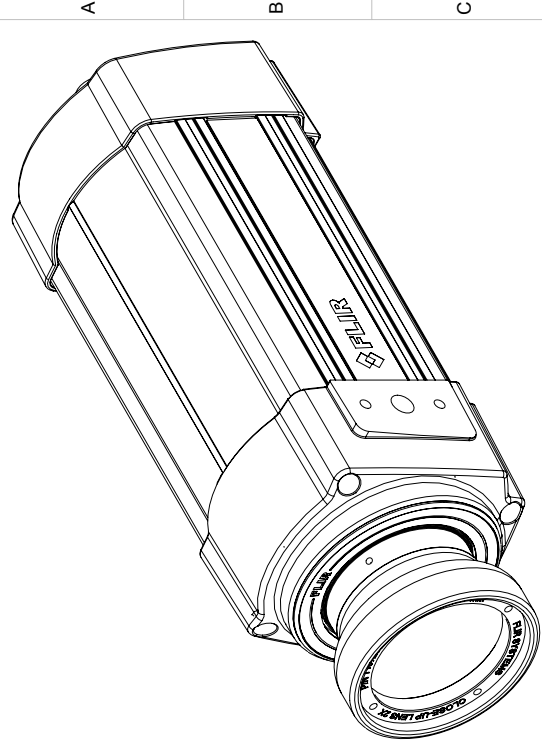

For additional dimensions see page 1

Modified 2012-04-18	Check CAHA	Drawn by R&D Thermography	Size A3	Scale 1:1	Sheet 7(8)	Size A
Basic dimensions FLIR A3xx/SC3xx						Sheet T125002

Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.
© 2012 FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply.

