



PORTABLE HC/O₂ DETECTOR

Gas Detection For Life

RX-8000 Series



Features

- Real-time detection for Combustibles 100%LEL/100vol%, O₂
- Strong sample drawing capability
- Intrinsically safe design
- IP 67 water/dust resistance
- Large display with auto back lighting
- Datalogging standard
- More than 15 hours of operation (NiMH batteries)

Applications


- Oil tanker
- Gas carrier
- Product tanker
- Refineries
- Petrochemical/Chemical plants
- Confined space
- Water/Wastewater treatment
- Power plant
- Utilities

The RX-8000 series portable gas monitors are designed to meet the requirements of the marine market for testing of cargoes and confined spaces for hydrocarbon and oxygen content. These models provide real time detection of hydrocarbons and methane up to 100 % volume, with the gas reading automatically ranging up and down from % LEL to % volume as the concentration changes. A long life electrochemical type oxygen sensor is also available with range of 0-25 % volume. Hydrocarbons and methane are detected using NDIR (non-dispersive infrared) sensors that can detect in inerted and ambient environments.

The RX series instruments are intrinsically safe (ATEX/IECEX Exia IIC T4) and MED certified, IP-67 compliant for water and dust resistance, and utilize a strong internal sample pump, with sample lines available in lengths up to 30m. Battery power is provided by either alkaline (3 AA) battery pack (10 hour operating time) or a rechargeable lithium Ion battery pack (15 hour operation). A loud (95dB) alarm buzzer and ultra bright LED lights provide warning of hazardous conditions.

RX-8000 Series

Target gas	Combustibles (i-C ₄ H ₁₀ or CH ₄ calibration)		Oxygen (O ₂)
Detection principle	Non-Dispersive Infrared Ray		Galvanic cell
Detection range (Increments)	0-100 vol% (0.5 vol%)	0-100 vol% (0.5% LEL)	0-40% (0.1%)
Accuracy	+/- 5 vol%	+/- 5% LEL	Range 0-25% : +/- 0.7% Range 26-40% : +/- 3.0%
Response time	T90 within 30 seconds		T90 within 20 seconds
Sampling method	Sample Draw: Minimum 0.75L/min		
Display	Digital display and Bar graph		
Power source	Lithium-ion battery (3 hours for a full charge) : Standard AA Alkaline battery (3pcs) : Option		
Continuous Operation	AA Alkaline battery: more than 10 hours Lithium-ion battery: more than 15 hours		
Operating temp & Humidity	-20 ~ + 50C (-4 ~ + 122 F) below 95% Rh (Non-condensing)		
Dimensions & Weight	Approx. 154 (W) x 81(H) x 127 (D) mm Aprox. 1.0 Kg (Aprox. 6.1" (W) x 3.1" (H) x 5.0" (D)mm Aprox. 2.4lb)		
Ingress proof rating	Equivalent to IP67		
Explosion Proof	EX ia II C T4		
Approvals	IECEX, ATEX, TIIS, MED, HK Complying to IEC60079-29-1, EN50104 } Pending		
Additional features	Indication to show energizing (pilot indicator and pump driving indicator), Activating confirmation beep and LED's flash (every one minute), Pump stop function, Bump test function, IrDA communication, Data logger, Password protection		
Standard accessories	Lithium-ion battery unit Bul-8000, AC powered charger (100V~240V), Gas sampling probe, Gas sampling hose (3.2 ft), Neck / shoulder strap, Filter tube, Fixing belt for filter tube, Manual		

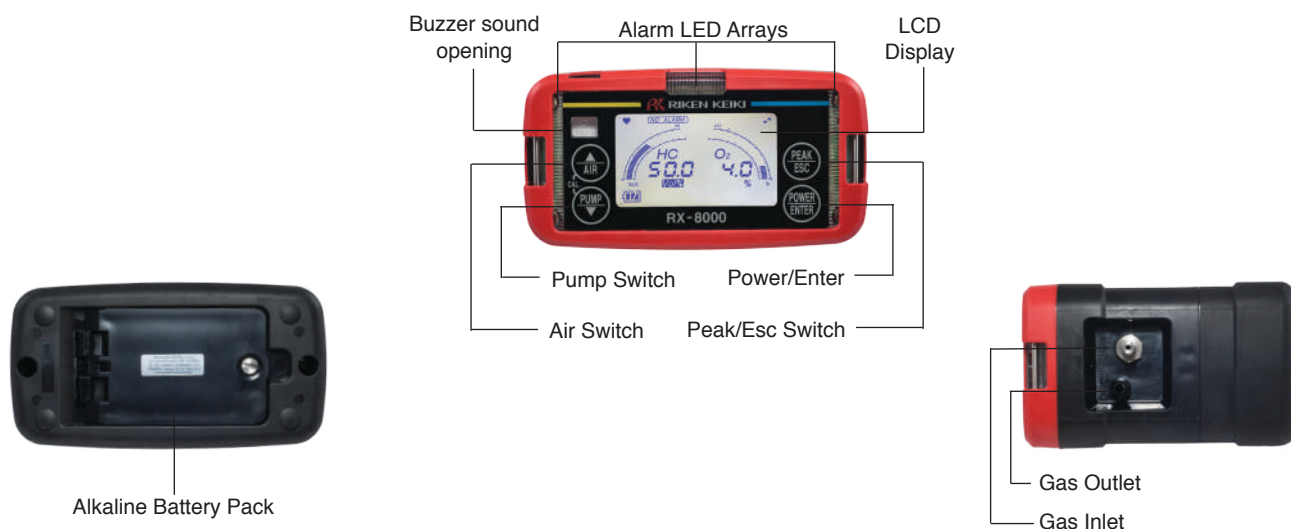

* Specifications subject to change without notice.

Authorized Distributor:

1.800.561.8187

www.itm.com

information@itm.com