



800 SERIES

- Proven 100 Ω platinum resistance sensor provides reliability, stability and unbeatable performance
- Economical price
- Standard temperature ranges from -40 °F to 120 °F through 50 °F to 400 °F
- Wide variety of temperature ranges and connections
- Quick response time
- 316 Stainless Steel housing
- Burnout protection from 3.3 mA to 23 mA
- Also available with our 1800 Series attachable loop indicator
- CE compliant to suppress RFI, EMI, and ESD

APPLICATIONS

- Water systems
- Storage tanks
- Industrial machinery and machine tools
- HVAC systems
- Refrigeration systems



Also available with our 1800 Series attachable loop indicator. See www.noshok.com for details.

SPECIFICATIONS

Output signals	4 mA to 20 mA 2-wire, 0 Vdc to 5 Vdc 3-wire 0 Vdc to 10 Vdc 3-wire, 1 Vdc to 5 Vdc 3-wire
Temperature ranges	Standard ranges from -40 °F to 400 °F
Accuracy	
Measuring element	Class B per EN 60751 (IEC 751)
Output	$\pm[0.30 + 0.005 \cdot t]$ °C $\pm 0.5\%$ full scale
Sensor protection	Burnout protected from 3.3 mA to 23 mA
Power requirement*	10 Vdc to 30 Vdc (4 mA to 20 mA, 2-wire) 10 Vdc to 30 Vdc (0 Vdc to 5 Vdc, 3-wire) 10 Vdc to 30 Vdc (1 Vdc to 5 Vdc, 3-wire) 14 Vdc to 30 Vdc (0 Vdc to 10 Vdc, 3-wire)
Load limitations	$\leq (V_{Power} - 10)/0.020$ Amp for 4 mA to 20 mA output $\leq 5,000 \Omega$ for 1 Vdc to 5 Vdc output $\leq 10,000 \Omega$ for 0 Vdc to 10 Vdc output $\leq 4,500 \Omega$ for 0.5 Vdc to 4.5 Vdc output
Wetted materials	316 Stainless Steel
Housing material	316 Stainless Steel
Max. operating pressure	6 mm: 725 psi 8 mm: 1,500 psi
Ambient temperature	-40 °F to 185 °F (-40 °C to 85 °C)
Storage temperature	-40 °F to 185 °F (-40 °C to 85 °C)
Environmental rating	IP65 according to EN 60529/IEC 529
Electromagnetic rating	CE compliant to EMC norm EN 61326:1997/A1:1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity, over-voltage and short circuit protection
Weight	Approximately 4 oz.

* Unregulated



WARNING: This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Thermowells are recommended for pressure, corrosive fluids and high velocity applications.



ORDERING INFORMATION					
SERIES	800				
TEMPERATURE RANGES	-40/120	-40 °F to 120 °F	0/200	0 °F to 200 °F	25/125 20 °F to 240 °F
	0/100	0 °F to 100 °F	0/250	0 °F to 250 °F	50/300 50 °F to 300 °F
	0/140	0 °F to 140 °F	20/240	20 °F to 240 °F	50/400 50 °F to 400 °F
ACCURACY	1 Class B + (±0.5% BFSL)				
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire	3	1 Vdc to 5 Vdc, 3-wire	
	2	0 Vdc to 5 Vdc, 3-wire	5	0 Vdc to 10 Vdc, 3-wire	
PROCESS CONNECTIONS	2	1/4" NPT Male			48 1/2" NPT Male w/adjustable compression fitting
	8	1/2" NPT Male			
ELECTRICAL CONNECTIONS	1	36" cable (connected to option 8)			14 Hirschmann connection w/ISO 4400 1/2 "NPT conduit
	8	Hirschmann (DIN EN 175301-803 Form A)			25 M12 x 1 (4-pin)
STEM LENGTHS	025	2.5"			060 6" 120 12"
	040	4"			090 9"
STEM DIAMETERS	6	6 mm			8 8 mm

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

EXAMPLE

Series	800	800 - 50/300 - 1 - 1 - 8 - 8 - 040 - 6
Temperature range	50 °F to 300 °F	
Accuracy	±0.5% BFSL	
Output signal	4 mA to 20 mA, 2-wire	
Process connection	1/2" NPT Male	
Electrical connection	Hirschmann	
Stem length	4"	
Stem diameter	6 mm	

800 Series Platinum Resistance Temperature Transmitter

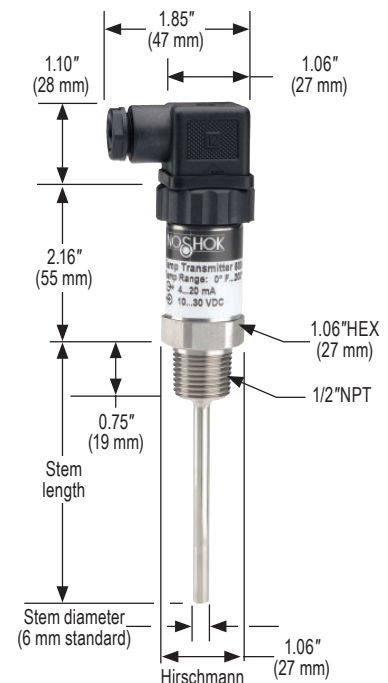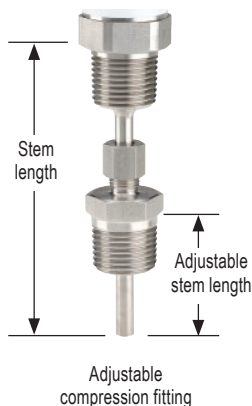

2-WIRE WIRING		
Wiring	Hirschmann	Cable
+ Supply	1	Red
+ Output	2	Black

3-WIRE WIRING		
Wiring	Hirschmann	Cable
+ Supply	1	Red
Common	2	Black
+ Output	3	White