
GEARWRENCH

User's Manual
42 in. 11-Drawer Industrial Rolling Cabinet

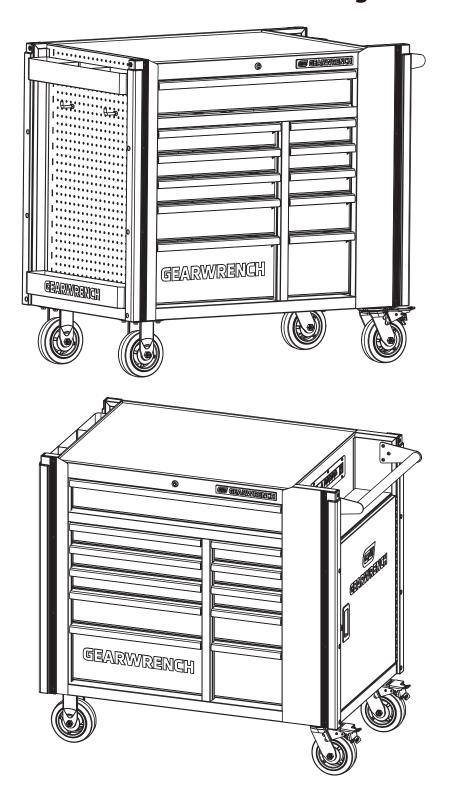

Safety Information

- 1. Do not pull this cabinet, push it when moving.
- 2. Use the brakes when this product is not being moved. This prevents the product from rolling.
- 3. Do not alter this product in any manner or it will void the warranty.
- 4. Before locking the cabinet, ensure the drawers are completely closed in order for the lock mechanism to work properly.
- Do not attach or mount this product to a vehicle or mobile trailers. This may cause personal injury or product damage. Mounting this product to any vehicle or mobile trailers in any manner will void warranty.
- 6. Be careful when opening more than one drawer. The product may become unstable and tip, which may cause personal injury orproduct damage.
- 7. Keep the product on level surfaces. The product may become unstable and tip if stored or moved on an unlevel surface, which may cause personal injury or product damage.
- 8. Lock the drawers before moving this product. The drawers could come open and make the product unstable and tip, which may cause personal injury or product damage.
- 9. Extension cord
 - Follow all manufacturers' Warnings and Operating Instructions for your extension cord.
- Only use a three-wire extension cord with all three prongs intact. Never remove the round grounding prong.
- Extension cord must be connected to a 125 Volt GFCI protected outlet with proper ground. If GFCI outlet is not available, use an extension cord with GFCI protection built in.
- Check the insulation and plugs of extension cord before using. Do NOT use cord if it is worn or damaged.
- □ Do NOT overload extension cord.
- Do NOT run over extension cord.
- □ Only use an extension cord that is rated for outdoor use.
- Do NOT connect extension cord to outlet that also supplies critical safety equipment with power.

10. Electrical Shock Hazard

- □ Do not plug cord into outlet with wet hands.
- Do not use this cabinet near a bathtub, a shower, or a swimming pool.
- □ Cabinet plugs must match the outlet.
- □ Never modify the plug in any way.
- □ Do not use any adapter plugs with earth (grounded) cabinet power strips.

NOTE: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- □ Reorient or relocate the receiving antenna.
- □ Increase the separation between the equipment and receiver.
- □ Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- $\hfill\Box$ Consult the dealer or an experienced radio/TV technician for help.

NOTE: This unit has one power supply cord. Make sure the cord is unplugged before any servicing or cleaning.

Specifications

Drawer load capacity 100 lbs
Bottom deep drawers load capacity 200 lbs
Heavy duty storage hook load capacity 35 lbs
Total weight capacity 2,500 lbs




Tools Required





*14 mm wrench or socket (not included)

Parts

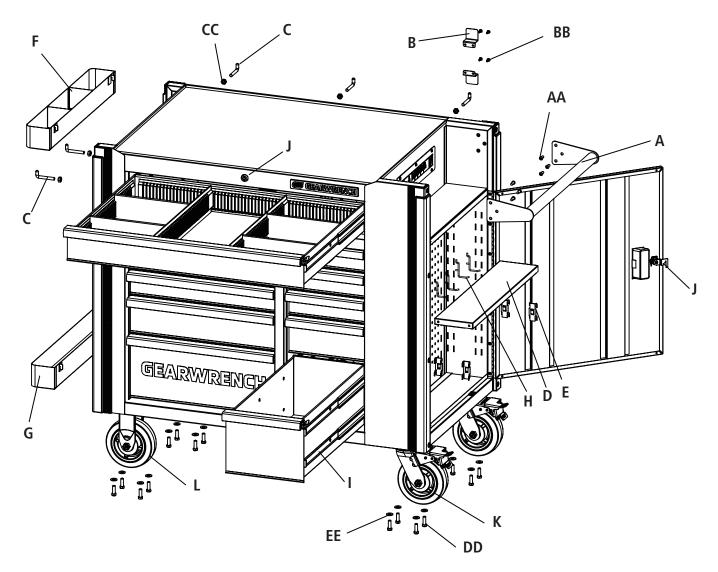


Part	Description	Quantity	Part ·	Description	Quantity
Α	Side Handle	1	J	Barrel Locks and Keys	2
В	Cord Storage Brackets	2	K	Swivel Caster	2
С	Heavy Duty Hooks	5	L	Rigid Caster	2
D	Shelf	1	AA	Screws M6x16mm	6
Е	Shelf Clips	4	BB	Screws M4x12mm	4
F	Parts Tray	1	CC	Nut M8	3
G	Storage Tray	1	DD	Bolts M8x25mm	16
Н	Peg Hooks	4	EE	Washers 19x8.5x2mm	16
ı	Drawer Slides	13 pair			

Assembly


Attaching the Side Handle

- □ Position the side handle (A) on the holes in the right of cabinet.
- □ Attach handle (A) with 6 screws (AA) and tighten with supplied hex key. Be careful not to over tighten. Note: The holes in the cabinet are tapped and do not require nuts.




Installing the Cord Storage Brackets

- □ Attach the brackets (B) to the back of the cabinet with two screws (BB) per bracket.
- □ Orient the brackets (B) with one pointed up and one pointed down so that the power outlet cord can be wrapped around the brackets (B) for storage.




Installing the Heavy Duty Storage Hooks

- □ Attach the nuts (CC) onto the hook (C) and then insert the hooks in the holes as shown.
- □ Be sure the hooks (C) are pointing upwards for installation, then hand-tighten the nuts (CC).
- □ Securely tighten the nuts (CC) with a 14mm wrench (not included). Be careful not to over tighten.

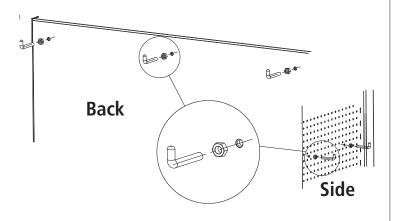

Installing the Shelf

- □ Put the 4 shelf clips (E) into the slots on the interior of the side cabinet as shown, installing two shelf clips (E) on each side of the interior.
- □ Be sure that all 4 shelf clips (E) are at the same level before installing the shelf (D). Shelf can be installed at desired level as long as the shelf clips are aligned correctly.





Installing Power Cord

- Until power cord located inside drawer.
- Gently pull cord plug through grommet.


Installing Two Storage Trays

□ To install parts tray (F) and storage tray (G), insert the hooks on the box into the desired holes on the left side panel of the cabinet. Be sure that the selected holes are aligned so that the box is level.

Operation


Removing the drawers

- Fully extend the empty drawer.
- Push up the one release lever while pulling down on the other release lever.
- Pull the drawer outward until it is released from the drawer slide.



Re-inserting the drawers

- Extend the drawer slides.
- Insert the brackets on each side of the drawer into the slots in the slides, being careful that they are properly positioned.
- Once properly inserted, completely close the drawer to set the slides in their proper positions.






Maintenance


Caster maintenance

 Grease the casters annually using high-quality bearing grease.



Drawer maintenance

 Lubricate the slides semi-annually with high-quality bearing grease.



- Periodically clean the drawer fronts, drawer trim, and other surfaces with a mild detergent and water.
- Remove grease and oil with a mild cleaning detergent.

Warranty

GearWrench® tool storage cabinets are warranted for 5 years from the date of purchase to be free of defects in material and workmanship.

Apex warrants to each original Customer of Products sold by Apex that such Products are, at the time of delivery to the Customer, free of material and workmanship defects, provided that no warranty is made with respect to:

- (a) any Product which has been modified, disassembled and/or reassembled or altered in any way or improperly installed;
- (b) any Product which has, in Apex's judgment, been subject to negligence, misuse, abuse, accident, improper storage or damage during shipment;
- (c) any Product which has not been operated and maintained in accordance with normal practice and in conformity with recommendations and published specifications of Apex; and
- (d) any Products which have been serviced or repaired by anyone other than an Authorized Repair Center of Apex or modified by anyone other than Apex. Normal wear and tear is also excluded.

These warranties set forth herein are the sole warranties applicable to Products and is in lieu of all other warranties, whether express, implied or statutory. The implied warranties of merchantability and fitness for a particular purpose are specifically excluded.

Remedies: Customer's sole and exclusive remedy for breach of this Warranty is, at the option of Apex, repair or replacement of the defective product.

The Apex Tool Group is not responsible for personal injury or damage resulting from improper tool usage, product modification, abuse or usage beyond expected product life.

GEARWRENCH® is a registered trademark of Apex Brands, Inc., a Division of Apex Tool Group, LLC

