
FIXED BLADE PRECISION SCREWDRIVER KITS

Narrow blades for work in tight spaces and low clearance areas







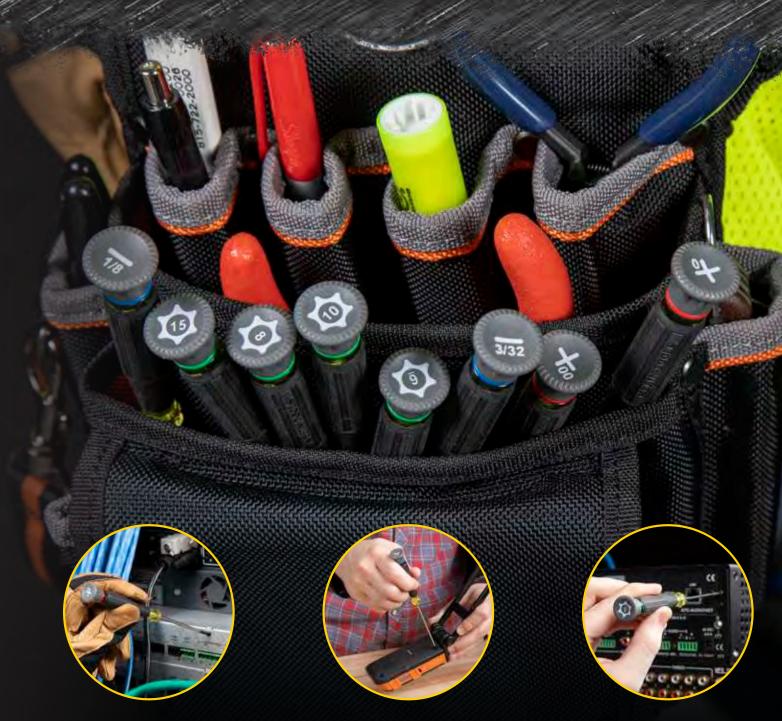

Kit 85617

Kit 85616

For Professionals
SINCE 1857™

| Kits Includes | Tip Size | #00 | #0 | 3/32" | 1/8" | T6H | T8H | T10H | T15H |
|---------------|----------------|-------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| | Tip Type | Phillips | | Slotted | | Tamperproof Torx | | | |
| | Shank Length | 2" (5.08 cm) | (7.62 cm) | (7.62 cm) | 4" (10.16 cm) | (7.62 cm) | (7.62 cm) | (7.62 cm) | (7.62 cm) |
| | Overall Length | 5.5" (13.97 cm) | 6.5" (16.51 cm) | 6.5" (16.51 cm) | 7.5" (19.05 cm) | 6.5" (16.51 cm) | 6.5" (16.51 cm) | 6.5" (16.51 cm) | 6.5" (16.51 cm) |
| Cat. No. | UPC 0-92644+ | | | | | | | | |
| 85615 | 85615-0 | • | • | • | • | | | | |
| 85616 | 85616-7 | | | | | • | • | • | • |
| 85617 | 85617-4 | • | • | • | • | • | • | • | • |
| MAG2 | 32446-8 | Magnetizer/Demagnetizer | | | | | | | |

TORX $\!\!\!^{\scriptscriptstyle \odot}$ is a registered trademark of Acument Intellectual Properties, I.I.C.



