

Unique Surface Probes



Adaptor Sold Separately

TAS-K-3


TAS-E-3

All the probes in this series meet the Standard Limits of Error.

**Model No. 88203(*)
Model No. 98203(*)
with Swivel Head**

For rotating, smooth metallic surfaces of 229 to 610 mm (9 to 24") in diameter. 90 m (300') per minute maximum surface velocity. Maximum surface temperature of 205°C (400°F).

Replacement elements not included, to purchase additional elements order Model No. 88203()-RE.*



TAS adaptor

All models supplied with a molded SMP or SMPW subminiature male connector. TAS adaptor sold separately.

**Model No. 88201(*)
Model No. 98201(*)
with Swivel Head**

A roller-surface probe, for use on moving or rotating, smooth surfaces with a velocity up to 61 m (200') per minute. Maximum surface temperature of 205°C (400°F).

Replacement elements not included, to purchase additional elements order Model No. 88201()-RE.*

Visit us online for dimensions.

**Model No. 88202(*)
Model No. 98202(*)
with Swivel Head**

A roller-surface probe, ideal for measuring outside wall temperatures of smooth plastic or steel piping. Can be used on moving or rotating surfaces of 559 to 1524 mm (22 to 60") in diameter, with 90 m (300') per minute maximum surface velocity. Maximum surface temperature of 205°C (400°F).

Replacement elements not included, to purchase additional elements order Model No. 88202()-RE.*

Ordering Example: 98201K, style 98201 swivel head roller surface probe in Type K thermocouple.


*** Specify Calibration:**

K: CHROMETM-ALOMEGATM


E: CHROMETM-Constantan




Unique Surface Probes Series 88000

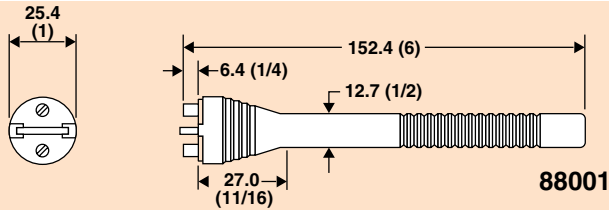


88001

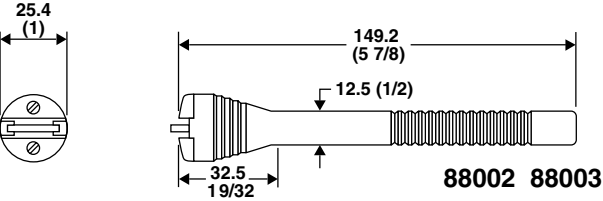


88002 88003

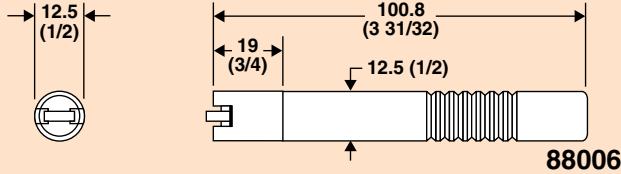


88006

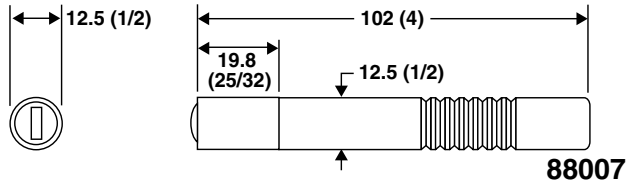


88007

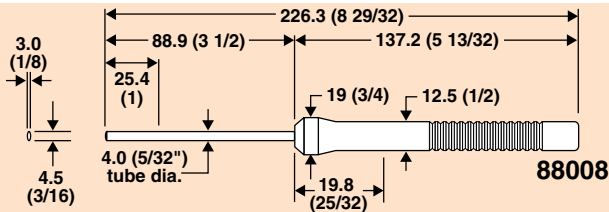


88008

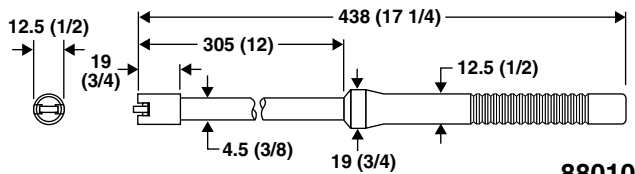


88010

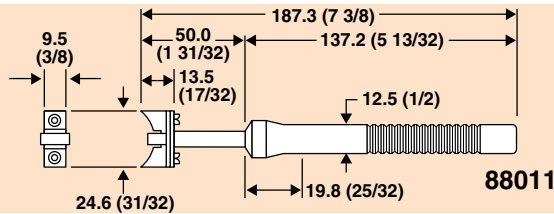


88011

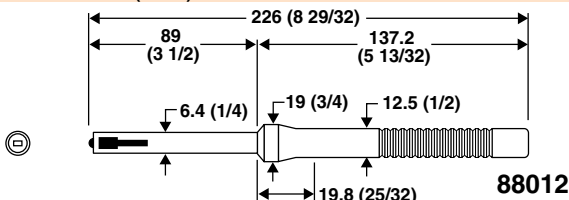


88012

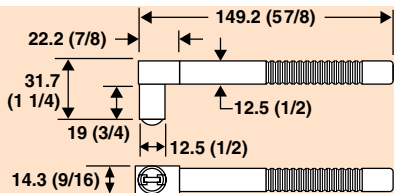


88016

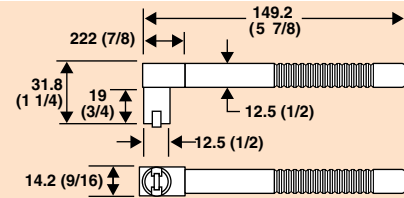


88026

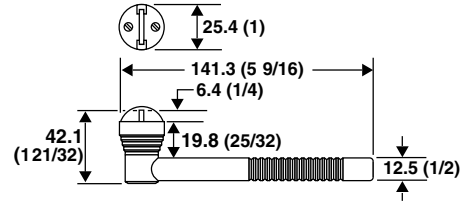


88101

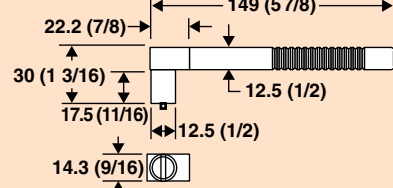


88102

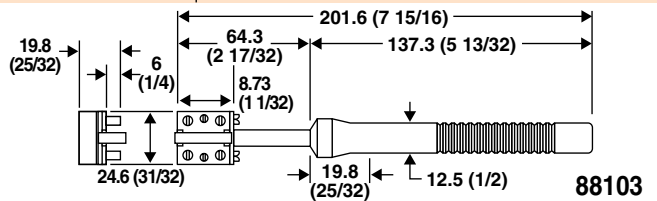


88103

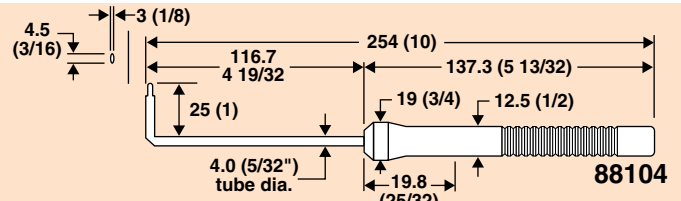


88104

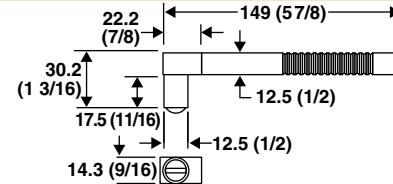

88105

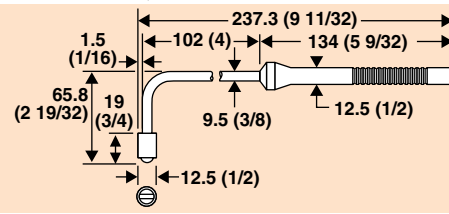


















88106

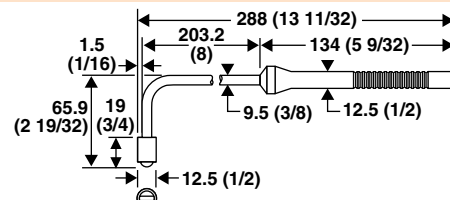

88107

Dimensions: mm (inches)


Unique Surface Probes Series 88000/98000

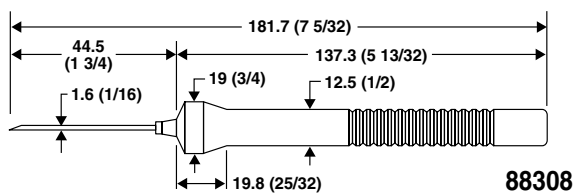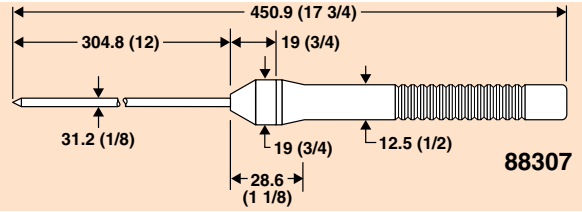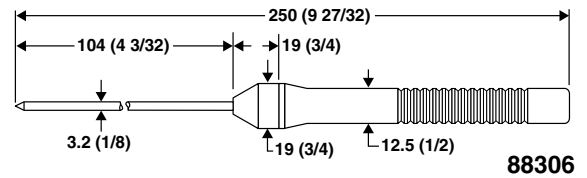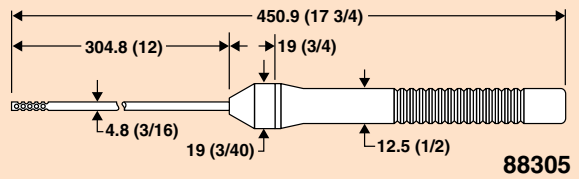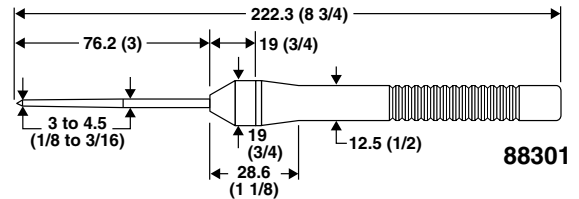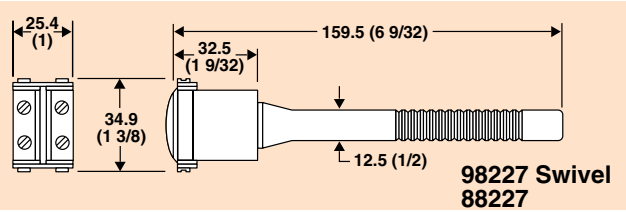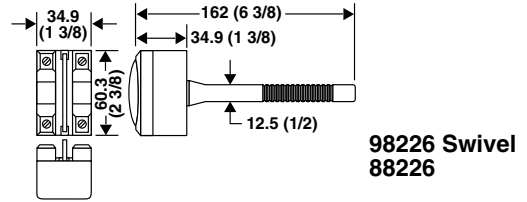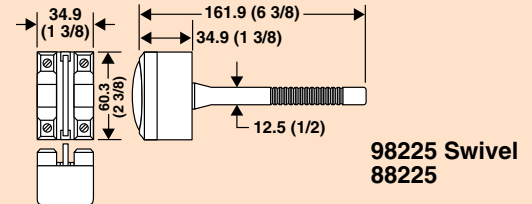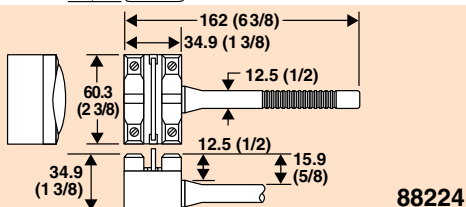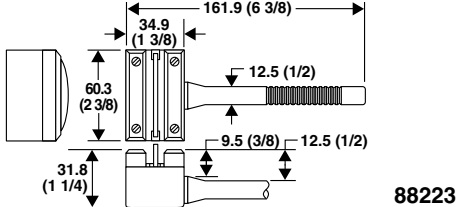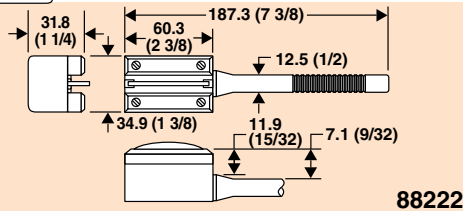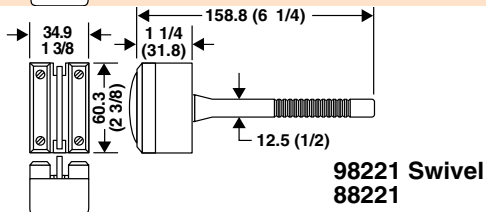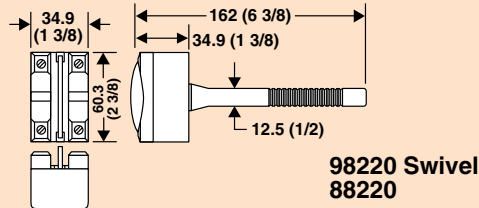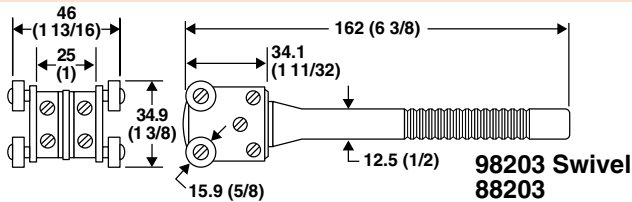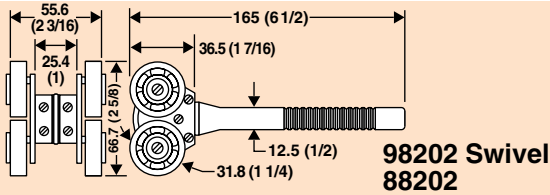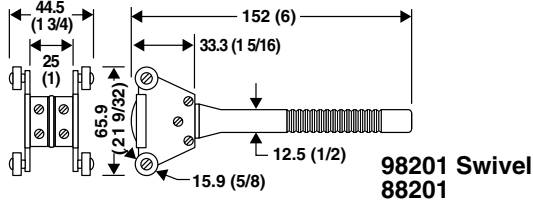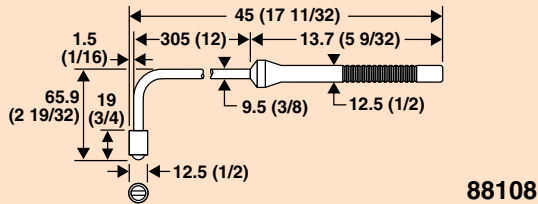


Dimensions: mm (inches)

Model 88009

1.5 (0.06) Max. Element Deflection

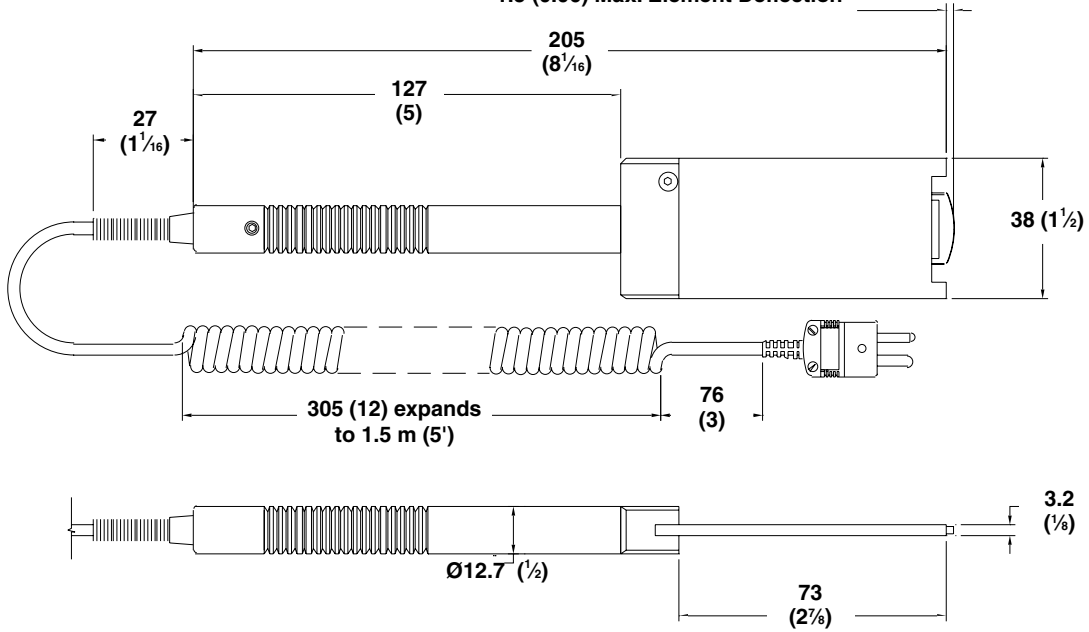

Model 88014

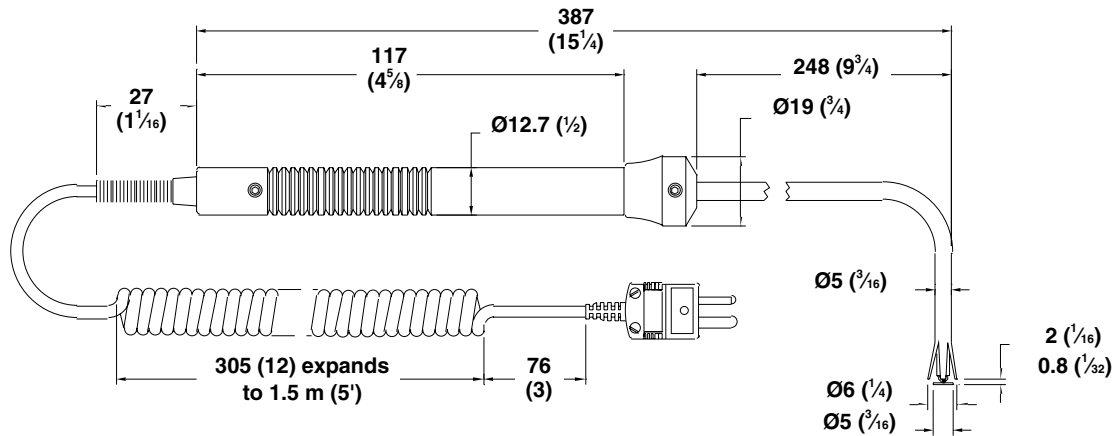

Model 88013

