

# TEMPEST

Fighting for performance

POWERFUL, LIGHTWEIGHT AND SELF-CONTAINED  
50-Minute Run Time with Removable Battery

## BATTERY BLOWER (BB-16 GEN2) BATTERY POWER BLOWERS



### 50-Minute Run Time

At Full Speed this powerful battery blower will run for 50 Minutes.



### Removable Battery

Removable Lithium-Ion with 3 hour quick charge.



### Built In Battery Charger

When plugged in, the battery is charging even while in use. (Charging occurs as long as the blower is not at 100% power)



### Only 51 Pounds w/Battery

#### 42 Pounds without battery

Lightweight highly durable build makes it easy to carry and deploy on site using shoulder strap.



### 10,940 CFM

The BB-16 produces a very powerful airflow tested to AMCA standards.



### WARRANTY

Blower: 3 Year Limited Warranty

Lithium-Ion Battery:

1 Year / 500 Charge Cycles



### ADJUSTABLE TILT

Tilt Range +65° to -90° with locking system (allows flat positioning to cover a utility hole)



### LED Flow-Path Lighting

Powerful LED lights positioned low for visibility below the smoke.



### Small Footprint

This Blower is half the size of a gas blower.

Dimensions: L x H x D  
22" x 21" x 11"

4708 North Blythe Avenue, Fresno, California 93722  
tempest.us.com • response@tempest.us.com • 800.346.2143

1.800.561.8187

www.itm.com

information@itm.com

# BATTERY BLOWER

(BB-16 GEN2)

TEMPEST POWER BLOWERS

tempest.us.com



## SPECIFICATIONS


Air Volume	10,940 CFM	Motor	0.8 HP / 600W Variable Speed Drive BLDC Totally Enclosed, Air over IP66
Weight	With battery 51 lbs. / Without battery 41 lbs.	Battery	Removable GEN 2 12.5AH / 585WH Li-Ion
Dimensions (L x H x D)	22"L x 21"H x 11"D	Charging Time	100% Charge in 3-hours with External Optional Charger
Propeller Diameter	16"	Ingress Protection	IP66
Run Time	50 Minutes at Full Speed	Drop Test	Designed to resist a Drop Test of 1.5M / 5'
Operating Temperature	-4°F to +130°F	Noise Level	76.3dB at 3m / 10'

## AVAILABLE OPTIONS

PART NUMBER	PRODUCT	INCLUDES
910-1815A	BB16-110V (Standard)	Electric PPV Blower, Variable Speed Drive, 16" Impeller Brushless DC Electric motor, with 1 GEN2 Battery, 1 Shoulder Strap, No external quick charger
910-1815B	BB16-110V (Standard Plus)	Electric PPV Blower, Variable Speed Drive, 16" Impeller Brushless DC Electric motor, with 1 GEN2 Battery, 1 Shoulder Strap, 1 external quick charger
910-1815C	BB16-110V (Deluxe)	Electric PPV Blower, Variable Speed Drive, 16" Impeller Brushless DC Electric motor, with 2 GEN2 Batteries, 1 Shoulder Strap, 1 external quick charger
910-1816A	BB16-220V (Standard)	Electric PPV Blower, Variable Speed Drive, 16" Impeller Brushless DC Electric motor, with 1 GEN2 Battery, 1 Shoulder Strap, No external quick charger
910-1816B	BB16-220V (Standard Plus)	Electric PPV Blower, Variable Speed Drive, 16" Impeller Brushless DC Electric motor, with 1 GEN2 Battery, 1 Shoulder Strap, 1 external quick charger
910-1816C	BB16-220V (Deluxe)	Electric PPV Blower, Variable Speed Drive, 16" Impeller Brushless DC Electric motor, with 2 GEN2 Batteries, 1 Shoulder Strap, 1 external quick charger

## AVAILABLE ACCESSORIES

585-007		Li-Ion GEN2 Battery 12.5 AH / 585 WH, IP65-Rated	i63-20.025		Deployed and connected in seconds, the ventilation spiral ducts are easy to install.
585-037		External Quick Charger GEN 2 for BB-16 Battery	i60-20.105		High Expansion foam adapter with 1.5" BSP M Premix inlet. Delivered with 35mm - 115' of PE Plastic film.
725-200		Easy to attach with Velcro straps rehab misting collar with 3/4" NH coupling	i63.20.030		Carrying Harness (Chest or Back Position)

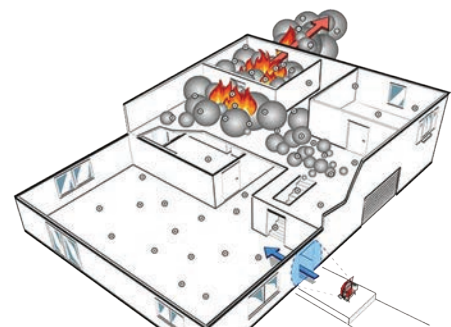

of 2

1.800.561.8187

www.itm.com

information@itm.com