



Edge Devices

Accessory Guide

© 2024 Teledyne FLIR LLC All rights reserved. No parts of this material may be copied, translated, or transmitted (in any medium) without the prior written permission of Teledyne FLIR LLC.

Names and marks appearing on the products herein are either registered trademarks or trademarks of Teledyne FLIR LLC and/or its subsidiaries. All other trademarks, trade names, or company names referenced herein are used for identification only and are the property of their respective owners.

Protected by one or more patents and patent applications. Learn more here: www.flir.com/patentnotice.

Photographs and images appearing in this manual may have been modified for illustrative purposes using commercial image editing software and may not always reflect an actual product configuration. The contents of this document are subject to change without notice.

Important Instructions and Notices to the User:

Modification of a Teledyne FLIR device without the express authorization of Teledyne FLIR LLC may void the user's authority under FCC rules to operate the device.

Document History

Revision	Date	Comment
100	September 2019	Initial Teledyne FLIR release
110	March 2020	Updated PoE injector information; updated discontinued accessories list
120	August 2020	Added cameras and accessories
130	November 2020	Updated cameras and accessories; updated PoE injector camera support
140	March 2021	Updated cameras and accessories
150	September 2021	Changed document title; updated devices and accessories
160	March 2022	Changed document title; updated devices, accessories, and discontinued accessories; added accessory information
170	December 2023	Changed document title; updated devices and accessories; added accessory information
180	April 2024	Updated accessories and discontinued accessories list

Product Registration and Warranty Information

Register your Product with Teledyne FLIR at <https://customer.flir.com>.

Table of Contents

1. Introduction	1
2. Quasar™ Visible Cameras	2
2.1 CB-640x Bullet Cameras	3
2.2 CF-6308 Fixed Box Camera	4
2.3 CM-6308 Panoramic Camera	5
2.4 CM-640x Mini-Dome Cameras	6
2.5 CP-6xxx PTZ Cameras	8
3. Ariel™ Visible Cameras	10
3.1 CB-330x Bullet Cameras	11
3.2 CC-3103 Corner Camera	12
3.3 CC-3405 Corner Camera	13
3.4 CM-3202 Mini-Dome Camera	14
3.5 CM-330x Mini-Dome Cameras	16
4. F-, FH-, and PT-Series Thermal Cameras	18
4.1 F-Series Cameras	19
4.2 FH-Series Cameras	20
4.3 PT-Series Cameras	22
5. Elara™ Devices	23
5.1 DX-Series Cameras	24
5.2 FB-Series Cameras	26
5.3 FC-Series Cameras	27
5.4 R-Series Radars	28
6. Saros™ Thermal Cameras	29
6.1 DH-390 Dome Camera	30
6.2 DM-Series Cameras	32
7. TRK-101 Analytics Encoder	34
8. Accessory Specifications	35
9. Power Accessories	47
10. Discontinued Accessories	49

1 Introduction

This guide lists and describes the accessories available for FLIR Security edge devices. For example, you can use this guide to select mounting accessories for FLIR Security cameras.

The guide is organized by device family:

- [Quasar™ Visible Cameras](#)
- [Ariel™ Visible Cameras](#)
- [F-, FH-, and PT-Series Thermal Cameras](#)
- [Elara™ Devices](#)
- [Saros™ Thermal Cameras](#)
- [TRK-101 Analytics Encoder](#)

With separate sections for:

- [Accessory Specifications](#)—including dimensions, shipping sizes / weights, and additional compatibility information
- [Power Accessories](#)—including PoE (power over Ethernet) injectors
- [Discontinued Accessories](#)—including suggested replacements, if available



How to use this guide

1. Go the section for a device.
2. Determine the appropriate accessories for your needs.
3. Go to [Accessory Specifications](#), and search for the accessories. Make sure the accessory specifications satisfy your requirements. If relevant, make sure accessories are compatible with each other.
4. Go to [Power Accessories](#) and find the appropriate power accessory for the device.

If you have any questions, contact Teledyne FLIR Support at <https://support.flir.com/>.

2 Quasar™ Visible Cameras


You can use this section to select accessories for the following Quasar visible cameras:

- [CB-640x Bullet Cameras](#)
- [CF-6308 Fixed Box Camera](#)
- [CM-6308 Panoramic Camera](#)
- [CM-640x Mini-Dome Cameras](#)
- [CP-6xxx PTZ Cameras](#)

2.1 CB-640x Bullet Cameras



The following accessories are available for Quasar Premium Bullet cameras:


Part number / item code	Description	Images (not to scale)
CM-CAPX-W32	Wall mount with pendant cap kit • Minimum wall thickness: 50mm (2") • Can use with CX-POLE-G32 pole mount kit	 <i>With camera</i>
CB-FCRK-64	Replacement for broken or scratched front cover	 <i>Replacement completed</i>

For more information about these and other accessories, see [Accessory Specifications](#).

2.2 CF-6308 Fixed Box Camera



The following accessories are available for the Quasar 4K Fixed Box camera:

Part number / item code	Description	Images (not to scale)
CF-ENCL-63	Outdoor environmental housing with AC 24V fan, heater, and sunshield	 <i>Without sunshield</i> 
CF-POLE-63	Pole mount kit for CF-ENCL-63, including straps • Pole diameter range $\varnothing$ 2.5-8.5" (63.5-215.9mm)	
CF-L308-11-I	Ultra HD i-CS Lens (3.9-10mm)	<i>Images not available</i>
CF-L308-21-I	Ultra HD i-CS Lens (9-50mm)	
CF-L304-21-P	Quad HD (1440p) lens, 12-50mm, F1.5, 1/1.8", P-Iris, IR corrected, CS mount	

For more information about these and other accessories, see [Accessory Specifications](#).

2.3 CM-6308 Panoramic Camera



The following accessories are available for the Quasar 4 x 2K Panoramic camera:

Part number / item code	Description	Images (not to scale)
CM-CAPX-63P	Pendant cap with 1.5" PF outer thread • Heavy-duty aluminum vandal mount • Ideal for indoor / outdoor & corrections applications • 0.75" conduit connection • Can use with CX-xxxx-G3, -G32, and other 1.5" PF inner thread mounting hardware	 CM-CAPX-63P  With camera
CM-IMG5-63P	5th imager	



For more information about these and other accessories, see [Accessory Specifications](#).

2.4 CM-640x Mini-Dome Cameras



The following accessories are available for Quasar Premium Mini-Dome and Quasar Premium Mini-Dome AI cameras:

Part number / item code	Description	Images (not to scale)
CM-CAPS-G3	Pendant cap with 1.5" PF outer thread • Can use with ○ CX-ARMX-G3 wall mount bracket ○ CX-ELBX-G3 wall mount bracket with power box ○ CX-GSNK-G32 gooseneck pipe ○ CX-XTND-G3 extendable gooseneck mount	 <i>With Camera</i>
421-0068-00 DH-PDST-00	Pendant mount shroud with 1.5" PF outer thread • Can use with CX-xxxx-G3, -G32, and other 1.5" PF inner thread mounting hardware	
421-0069-00 DH-PDST-01	Pendant mount kit, including 421-0068-00 pendant mount shroud and CX-ARMX-G3 wall mount bracket • Attaches directly to a wall • Can use with ○ DH-Series corner mount (421-0066-00) and pole mount (421-0067-00) kits ○ CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits	
CM-SECA-W4	Side conduit adapter kit, with cable housing attached • Replaces mounting bracket included in the camera kit • Attaches to standard electrical box or directly to mounting surface	

Part number / item code	Description	Images (not to scale)
CM-RCSD-G4	Recessed mount kit, including ceiling sticker template and trim ring • Supports conduit connections	 <i>Mounted with camera</i>
CM-SNSHLD-G4	Sunshield	
CM-CLEAR-64-11	Clear bubble	
CM-SMOKE-64-11	Smoked bubble	

For more information about these and other accessories, see [Accessory Specifications](#).


2.5 CP-6xxx PTZ Cameras

CP-6xxx-xx-I and -P models



The following accessories are available for the following cameras:

- Quasar 1080p IR PTZ Camera (CP-6302-31-I)
- Quasar 1080p FHD Dome Outdoor Pendant Mount PTZ Camera (CP-6302-31-P)
- Quasar 4K IR PTZ Cameras (CP-6408-21-I and CP-6408-31-I)

Part number / item code	Description	Images (not to scale)
CX-XTND-G3	Extendable gooseneck mount kit with cable box and wall mount plate (1.5" PF inner thread)	
CX-GSNK-G32	Gooseneck mount kit, including base plate and pipe (1.5" PF inner thread) • Can use with CX-GSNK-G32-B mounting bracket	
CX-DRP-G32-B	Ceiling mount kit, including base and 20cm drop-down pipe (1.5" PF inner thread) • Can use with CX-PIPE-G325 50 cm extension pipe	

Part number / item code	Description	Images (not to scale)
CX-ARMX-G3	Wall mount bracket (1.5" PF inner thread) Can use with CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits	
CX-ELBX-G3	Wall mount bracket (1.5" PF inner thread) with IP66 electrical box enclosure Can use with CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits	
CX-GSNK-G3	Gooseneck mount (1.5" PF inner thread) with IP66 electrical box enclosure - Attaches directly to a wall - Can use with CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits	
CP-63CLEAR-P	Clear bubble for CP-6302-31-P	<i>Images not available</i>
CP-63SMOKE-P	Smoked bubble for CP-6302-31-P	

CP-6302-30-R model

The following accessories are available for the Quasar 1080p FHD Dome Indoor Recessed Mount PTZ Camera:

Part number / item code	Description
CP-63CLEAR-R	Clear bubble
CP-63SMOKE-R	Smoked bubble



For information about mounting the CP-6302-30-R model, see the *Quasar Gen III Installation Manual*.

For more information about these and other accessories, see [Accessory Specifications](#).

3 Ariel™ Visible Cameras


You can use this section to select accessories for the following Ariel visible cameras:

- [CB-330x Bullet Cameras](#)
- [CC-3103 Corner Camera](#)
- [CC-3405 Corner Camera](#)
- [CM-330x Mini-Dome Cameras](#)
- [CM-3202 Mini-Dome Camera](#)

3.1 CB-330x Bullet Cameras



The following mounting accessories are available for Ariel 4K UHD and Ariel Quad HD Bullet Cameras:

Part number / item code	Description	Images (not to scale)
CB-WLBX-31	Wall junction box mount kit • IP66 cable management box • Heavy-duty aluminum with 1/2" conduit connection	 <i>CB-WLBX-31</i>  <i>Mounted with camera</i>
CB-PLBX-31	Pole mount kit, including pole mount adapter and CB-WLBX-31 wall junction box • Pole diameter range $\varnothing$ 130-152mm (5.12-5.99")	
CB-4S-31	4S electrical box mount adapter plate • For indoor or weather-protected applications	

For more information about these and other accessories, see [Accessory Specifications](#).

3.2 CC-3103 Corner Camera



The following accessory is available for the Ariel 3MP Corner Camera:


Part number / item code	Description	Images (not to scale)
CC-COVR-31	Replacement cover	

For more information about this accessory and about other accessories, see [Accessory Specifications](#).

3.3 CC-3405 Corner Camera



The following accessory is available for the Ariel Corner Camera:



Part number / item code	Description	Images (not to scale)
CC-BKBX-34	Back box • Supports 3/4" NPT thread conduit connections	 <i>With camera</i>
CC-COVR-34	Replacement for broken or scratched front cover	

For more information about this accessory and about other accessories, see [Accessory Specifications](#).

3.4 CM-3202 Mini-Dome Camera



The following accessories are available for the Ariel CM-3202 Camera:

Part number / item code	Description	Images (not to scale)
CM-CAPS-G3	Pendant cap with 1.5" PF outer thread - Requires CM-4S-32 adapter plate - Can use with - CX-ARMX-G3 wall mount bracket - CX-ELBX-G3 wall mount bracket with power box - CX-GSNK-G32 gooseneck pipe - CX-XTND-G3 extendable gooseneck mount	<i>Image not available</i>
CM-4S-32	4S electrical box mount adapter plate - For outdoor applications - Can use with DH-Series pendant mount accessories	
CM-RCSD-G2A	Recessed mount kit, including mounting template guide sticker, trim ring, and CM-4S-32 adapter plate	
CM-WLBX-42	Wall & surface junction box mount kit Heavy-duty aluminum mount	
CM-CAPX-W32	Pendant cap and wall mount kit, including mounting arm and pendant cap - Minimum wall thickness: 50mm (2") - Can use with CX-POLE-G32 pole mount kit	 <i>With camera</i>

Part number / item code	Description	Images (not to scale)	
CM-CADPT-W32	Pendant mount adapter kit for 1.5" inner thread mounting hardware, including pendant cap, mounting pad, and thread adapter • Can use to mount a CM-3202 mini-dome camera onto existing mounting hardware for CM-3102 mini-dome camera • Can use with CX-xxxx-G3, -G32, and other 1.5" PF inner thread mounting hardware	 With camera	
CM-CLEAR-32-11	Clear bubble for CM-3202 mini-dome camera		
CM-SMOKE-32-11	Smoked bubble for CM-3202 mini-dome camera	CM-CLEAR-32-11	CM-SMOKE-32-11

For more information about these and other accessories, see [Accessory Specifications](#).

3.5 CM-330x Mini-Dome Cameras



The following accessories are available for Ariel 4K UHD and Ariel Quad HD Mini-Dome Cameras:

Part number / item code	Description	Images (not to scale)
CM-CAPX-31	Pendant cap with 1.5" PF outer thread - Indoor or outdoor applications 0.75" female EMT conduit connection - Can use with CX-xxx-G3, -G32, and other 1.5" PF inner thread mounting hardware	 CM-CAPX-31  With camera
CM-RCSD-G2	Recessed mounting kit, including peel & stick template - Top mounted 4S electrical box attachment points - Supports conduit connections - Maximum surface thickness: 42mm (1.75")	 With camera
CM-BKBX-31	Back box - Ideal for indoor/outdoor & corrections applications - Heavy-duty aluminum vandal mount - IP67 & IK10 ratings 0.75" conduit connection	 CM-BKBX-31  With camera

Part number / item code	Description	Images (not to scale)
CM-4S-31	4S electrical box mount adapter plate For indoor or weather-protected applications Note: All CM-33xx cameras can directly mount to standard round electrical boxes without additional accessories.	
CM-CLEAR-31-11	Clear bubble for CM-330x varifocal series	Image not available

For more information about these and other accessories, see [Accessory Specifications](#).

4 F-, FH-, and PT-Series Thermal Cameras

You can use this section to select accessories for the following thermal cameras:

- [F-Series Cameras](#)
- [FH-Series Cameras](#)
- [PT-Series Cameras](#)

4.1 F-Series Cameras



The following mounting accessory is available for F-Series cameras:

Part number / item code	Description	Images (not to scale)
500-1123-00	Wall mount assembly • Can use with other F-, FH-, FC-, and PT-Series mounting accessories	
500-1120-00	Pedestal mount assembly	

For more information about this accessory and other accessories, see [Accessory Specifications](#).

4.2 FH-Series Cameras



The following mounting accessories are available for FH-Series ID and FH-Series R non-PTZ cameras. They do not support FH-Series R PTZ cameras, which are designed to be mounted on a motorized pan-tilt unit (PTU).

Part number / item code	Description	Images (not to scale)
421-0086-00	Illuminator mount bracket	
421-0087-00	Wall mount assembly Can use with other F-, FH-, FC-, and PT-Series mounting accessories	
500-1120-00	Pedestal mount assembly	

For more information about these and other accessories, see [Accessory Specifications](#).

FH-Series ID and FH-Series R non-PTZ cameras support the following Raytec IR LED illuminators, according to model / lens:

FH-Series model	Raytec products				Images (not to scale)
	Illuminator model	Angles	Lens model	Distances	
FH-369	VAR2-i6-1	120 x 50°	VAR-i6-LENS-12050 (Optional)	30m (98ft)	
FH-324		35 x 10°	Fitted as standard	100m (394ft)	

FH-Series model	Raytec products				Images (not to scale)
	Illuminator model	Angles	Lens model	Distances	
FH-669	VAR2-i6-2	60 x 25° per panel	Included	Narrow: 99m (325ft) at 60° Wide: 70m (230ft) at 120°	
FH-313	VAR2-i8-1	35 x 10°	Fitted as standard	165m (541ft)	
FH-625					
FH-644		60 x 25°	Included	95m (311ft)	
FH-612	VAR2-i8-2	10 x 10° per panel	Included	Narrow: 500m (1640ft) at 10° Wide: 354m (1161ft) at 20°	
FH-617	VAR2-i16-1	35 x 10°	Fitted as standard	250m (820ft)	
FH-610		10 x 10°	Included	500m (1640ft)	
FH-608					

4.3 PT-Series Cameras



The following mounting accessory is available for PT-Series cameras:

Part number / item code	Description	Images (not to scale)
500-1110-00	Wall mount assembly • Can use with other F-, FH-, FC-, and PT-Series mounting accessories	

For more information about this accessory and other accessories, see [Accessory Specifications](#).

5 Elara™ Devices


You can use this section to select accessories for the following Elara devices:

- [DX-Series Cameras](#)
- [FB-Series Cameras](#)
- [FC-Series Cameras](#)
- [R-Series Radars](#)

5.1 DX-Series Cameras



The following mounting accessories are available for Elara DX-Series PTZ cameras:

Part number / item code	Description	Images (not to scale)
CX-XTND-G3	Extendable gooseneck mount kit with cable box and wall mount plate (1.5" PF inner thread)	
CX-GSNK-G32	Gooseneck mount kit, including base plate and pipe (1.5" PF inner thread) Can use with CX-GSNK-G32-B mounting bracket	
CX-DRP-G32-B	Ceiling mount kit, including base and 20cm drop-down pipe (1.5" PF inner thread) Can use with CX-PIPE-G325 50 cm extension pipe	
CX-ARMX-G3	Wall mount bracket (1.5" PF inner thread) Can use with CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits	

Part number / item code	Description	Images (not to scale)
CX-ELBX-G3	Wall mount bracket (1.5" PF inner thread) with IP66 electrical box enclosure • Can use with CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits	
CX-GSNK-G3	Gooseneck mount (1.5" PF inner thread) with IP66 electrical box enclosure • Attaches directly to a wall • Can use with CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits	

For more information about these and other accessories, see [Accessory Specifications](#).

5.2 FB-Series Cameras



The following mounting accessories are available for Elara FB-Series cameras:

Part number / item code	Description	Images (not to scale)
CB-WLBX-62	Wall junction box mount kit • IP66 cable management box • Heavy-duty aluminum with 1/2" conduit connection	A white, circular wall junction box mount kit, shown from a top-down perspective.
CB-PLBX-62	Pole junction box mount kit, including straps • IP66 cable management box with 1/2" conduit connection • Pole diameter range $\varnothing$ 64-216 mm (2 1/2-8 1/2")	A white, circular pole junction box mount kit, shown from a side perspective with its lid open, revealing internal components and a strap.

For more information about these and other accessories, see [Accessory Specifications](#).

5.3 FC-Series Cameras



The following accessories are available for Elara FC-Series cameras:



Part number / item code	Description	Images (not to scale)
4129742	Concealed cable wall mount • Can use with other F-, FH-, FC-, and PT-Series mounting accessories	
4132982	Large pole mount kit for use with 4129742 wall mount assembly • Concealed cables • Pole diameter range ø 75-180 mm (3-7")	

For more information about these and other accessories, see [Accessory Specifications](#).

5.4 R-Series Radars



The following mounting accessories are available for the Elara R-Series Radars:

Part number / item code	Description	Images (not to scale)
421-0066-00 DH-CRNR-00	Corner mount kit	
421-0067-00 DH-POLE-00	Pole mount kit, including straps • Pole diameter range $\varnothing$ 150-230mm (6.0-9.0")	
421-0083-00	180° dual-unit wall mount kit	

For more information about these and other accessories, see [Accessory Specifications](#).

6 Saros™ Thermal Cameras



You can use this section to select accessories for the following Saros thermal cameras:

- [DH-390 Dome Camera](#)
- [DM-Series Cameras](#)

6.1 DH-390 Dome Camera



The following mounting accessories are available for the Saros DH-390 Dome camera:

Part number / item code	Description	Images (not to scale)
CM-CAPS-G3	Pendant cap with 1.5" PF outer thread - Can use with - CX-ARMX-G3 wall mount bracket - CX-ELBX-G3 wall mount bracket with power box - CX-GSNK-G32 gooseneck pipe - CX-XTND-G3 extendable gooseneck mount	<i>Image not available</i>
421-0066-00 DH-CRNR-00	Corner mount kit	
421-0067-00 DH-POLE-00	Pole mount kit Pole diameter range $\varnothing$ 150-230mm (6.0-9.0")	
421-0068-00 DH-PDST-00	Pendant mount shroud with 1.5" PF outer thread Can use with CX-xxx-G3, -G32, and other 1.5" PF inner thread mounting hardware	
421-0069-00 DH-PDST-01	Pendant mount kit, including 421-0068-00 pendant mount shroud and CX-ARMX-G3 wall mount bracket - Attaches directly to a wall - Can use with DH-Series corner mount (421-0066-00) and pole mount (421-0067-00) kits	


Part number / item code	Description	Images (not to scale)
	○ CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits	
421-0083-00	180° dual-unit wall mount kit	

For more information about these and other accessories, see [Accessory Specifications](#).

6.2 DM-Series Cameras



The following mounting accessories are available for Saros DM-Series PTZ cameras:

Part number / item code	Description	Images (not to scale)
CX-XTND-G3	Extendable gooseneck mount kit with cable box and wall mount plate (1.5" PF inner thread)	
CX-GSNK-G32	Gooseneck mount kit, including base plate and pipe (1.5" PF inner thread) Can use with CX-GSNK-G32-B mounting bracket	
CX-DRP-G32-B	Ceiling mount kit, including base and 20cm drop-down pipe (1.5" PF inner thread) Can use with CX-PIPE-G325 50 cm extension pipe	
CX-ARMX-G3	Wall mount bracket (1.5" PF inner thread) Can use with CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits	

Part number / item code	Description	Images (not to scale)
CX-ELBX-G3	Wall mount bracket (1.5" PF inner thread) with IP66 electrical box enclosure • Can use with CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits	
CX-GSNK-G3	Gooseneck mount (1.5" PF inner thread) with IP66 electrical box enclosure • Attaches directly to a wall • Can use with CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits	

For more information about these and other accessories, see [Accessory Specifications](#).

7 TRK-101 Analytics Encoder

The following accessory is available for the TRK-101 analytics encoder:

Part number / item code	Description	Images (not to scale)
ACC-PNL-TRK101	10-unit rack mount kit	

8 Accessory Specifications

This section provides specifications such as dimensions and shipping box size / weight, along with compatibility information, for FLIR Security Edge Device accessories. If relevant, you can jump directly to:

- [CX-xxxx-G3 and -G32 Accessories](#)
- [DH-Series Accessories](#)
- [F-, FH-, PT-, and FC-Series Accessories](#)

Part number / item code	Description and specifications
CM-CAPX-W32	Pendant cap and wall mount kit, including mounting arm and pendant cap, for CB-640x bullet camera and for CM-3202 mini-dome camera • Minimum wall thickness: 50mm (2") • Can use with CX-POLE-G32 pole mount kit Dimensions 244 x 152 x 142 mm Color FLIR White
CF-ENCL-63	Outdoor environmental housing for CF-6308-00-0 fixed box camera with AC 24V fan, heater, and sunshield Power 24VAC @20W Housing Top: Aluminum Bottom: Aluminum Sunshield: Aluminum Compliance IK10 / IP68 Suitable camera size 85 (W) x 90 (H) x 200 (L) mm Dimensions including sunshield 157 (W) x 130 (H) x 360 (L) mm Temperature range -20 to +50C (-4 to +122F) Color White Shipping box size 28 x 18 x 46 cm Shipping box weight 3.88 kg
CF-POLE-63	Pole mount kit for CF-ENCL-63, including straps Dimensions 152 (L) x 161 (W) x 73 (D) mm Pole diameter range ø 2.5-8.5" Color White Shipping box size 17.5 x 17 x 8.5 cm Shipping box weight 1.29 kg
CF-L308-11-I	Ultra HD i-CS Lens (3.9-10mm) for CF-6308-00-0 fixed box camera Shipping box size 49 x 36 x 33 cm Shipping box weight 10 kg

Part number / item code	Description and specifications
CF-L308-21-I	Ultra HD i-CS Lens (9-50mm) for CF-6308-00-0 fixed box camera Shipping box size 49 x 36 x 33 cm Shipping box weight 10 kg
CF-L304-21-P	Quad HD (1440p) lens for CF-6308-00-0 fixed box camera, 12-50mm, F1.5, 1/1.8", P-Iris, IR corrected, CS mount Shipping box size 66 x 38 x 39 cm Shipping box weight 20 kg
CM-CAPX-63P	Pendant cap for CM-6308 panoramic camera • Heavy-duty aluminum vandal mount • IP67 & IK10 ratings w/ 0.75" conduit • Ideal for indoor / outdoor & corrections applications
CM-IMG5-63P	5th imager for CM-6308 panoramic camera Dimensions 104.4 x 77.3 x 48.8 mm Color Black
CM-SECA-W4	Side conduit adapter kit for CM-640x mini-dome cameras : • Includes cable housing attached Dimensions 191 x 157 x 52 mm Color Grey Shipping box size 234 x 234 x 128 mm Shipping box weight 2.83 kg
CM-RCSD-G4	Recessed mount kit for CM-640x mini-dome cameras , including ceiling sticker template and trim ring • Supports conduit connections Dimensions 212 x 212 x 76 mm Trim ring color FLIR White Shipping box size 234 x 234 x 128 mm Shipping box weight 1.11 kg
CM-SNSHLD-G4	Sunshield for CM-640x mini-dome cameras Dimensions 175.68 x 200.51 x 87.66 mm Color FLIR White Shipping box size 234 x 234 x 128 mm Shipping box weight 0.47 kg
CM-CLEAR-64-11	Clear bubble for CM-640x mini-dome cameras Dimensions 161 x 161 x 100 mm Outer ring color FLIR White
CM-SMOKE-64-11	Shipping box size 234 x 234 x 128 mm Shipping box weight 0.65 kg Smoked bubble for CM-640x mini-dome cameras


Part number / item code	Description and specifications
CP-63CLEAR-P	Clear bubble for CP-6302-31-P pendant PTZ camera Dimensions $\varnothing$ 193 x 127.7 (max) mm Color FLIR White
CP-63SMOKE-P	Shipping box size 260 x 255 x 170 mm Shipping box weight 0.60 kg Smoked bubble for CP-6302-31-P pendant PTZ camera
CP-63CLEAR-R	Clear bubble for CP-6302-30-R recessed PTZ camera Dimensions $\varnothing$ 212.4 x 102 mm Color FLIR White (with logo printing)
CP-63SMOKE-R	Shipping box size 260 x 255 x 170 mm Shipping box weight 0.55 kg Smoked bubble for CP-6302-30-R recessed PTZ camera
CB-WLBX-31	Wall junction box mount kit for CB-330x bullet cameras • IP66 cable management box • Heavy-duty aluminum with 1/2" conduit connects Dimensions 47.5 x 120 mm Color FLIR White Shipping box size 66 x 29 x 18 cm Shipping box weight 6.5 kg
CB-PLBX-31	Pole mount kit for CB-330x bullet cameras , including pole mount adapter and CB-WLBX-31 wall junction box Dimensions Pole bracket 240 x 180 x 60 mm Junction box 47.5 x 120 mm Pole diameter range $\varnothing$ 130-152 mm Color FLIR White
CB-4S-31	4S electrical box mount adapter plate for CB-330x bullet cameras • For indoor or weather-protected applications Dimensions 107 x 107 x 3 mm Color Silver
CC-COVR-31	Replacement cover for CC-3103 corner camera Dimensions 185 x 180 x 32.3 mm Color FLIR White

Part number / item code	Description and specifications
CC-BKBX-34	Backbox for CC-340x corner cameras • Supports conduit connections Dimensions 147.97 x 158.22 x 36.76 mm (5.83 x 6.23 x 1.45") Shipping box size 15.0 x 14.0 x 4.0 cm Shipping box weight 1 kg
CC-COVR-34	Replacement for broken or scratched CC-3405 camera front cover Dimensions 165 x 154.16 mm (6.50 x 6.07") Color FLIR White
CM-CAPX-31	Pendant cap with 1.5" PF outer thread for CM-330x mini-dome cameras • Indoor or outdoor applications • 0.75" female EMT conduit connection • Can use with CX-xxx-G3, -G32, and other 1.5" PF inner thread mounting hardware
CM-RCSD-G2	Recessed mounting kit for CM-330x mini-dome cameras , including peel & stick template • Top mounted 4S electrical box attachment points • Supports conduit connections • Maximum surface thickness: 42mm (1.75") Color White
CM-BKBX-31	Conduit back box for CM-330x mini-dome cameras : • Ideal for indoor/outdoor & corrections applications • Heavy-duty aluminum vandal mount • IP67 & IK10 ratings • 0.75" conduit connection Dimensions 147.9 x 147.9 x 58.2 mm Color FLIR White
CM-4S-31	4S electrical box mount adapter plate for CM-330x mini-dome cameras • For indoor or weather-protected applications Note: All CM-330x cameras can directly mount to standard round electrical boxes without accessory parts. Dimensions 107 x 107 x 3 mm Color Silver
CM-CLEAR-31-11	Clear bubble for CM-330x varifocal series Dimensions 139 x 139 x 39.7 mm Color FLIR White


Part number / item code	Description and specifications
CM-4S-32	4S electrical box mount adapter plate for CM-3202 mini-dome camera - For outdoor applications - Can use with DH-Series pendant mount accessories Dimensions 142 (D) x 5 (H) mm Color FLIR White
CM-RCSD-G2A	Recessed mount kit for CM-3202 mini-dome camera, including mounting template guide sticker, trim ring, and CM-4S-32 adapter plate Dimensions 223 (D) x 7.3 (H) mm Color FLIR White
CM-WLBX-42	Wall & surface junction box mount kit for CM-3202 mini-dome camera Heavy-duty aluminum mount Dimensions 147 (D) x 60 (H) mm Color FLIR White
CM-CADPT-W32	Pendant mount adapter kit for mounting a CM-3202 mini-dome camera onto 1.5" inner thread mounting hardware, including pendant cap, mounting pad, and thread adapter - Can use to mount a CM-3202 mini-dome camera onto existing mounting hardware for CM-3102 mini-dome camera - Can use with CX-xxx-G3, -G32, and other 1.5" PF inner thread mounting hardware Dimensions 150 (D) x 88.3 (H) mm Color FLIR White Shipping box size 177 x 165 x 101 mm Shipping box weight 800 g
CM-CLEAR-32-11	Clear bubble for CM-3202 mini-dome camera Dimensions 124 (D) x 99 (H) mm Color FLIR White
CM-SMOKE-32-11	
CB-WLBX-62	Wall junction box mount kit for FB-Series cameras - IP66 cable management box - Heavy-duty aluminum with 1/2" conduit connection Shipping box size 17.3 x 17.3 x 10.7 cm Shipping box weight 0.84 kg

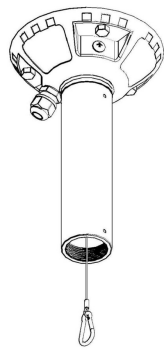
Part number / item code	Description and specifications
CB-PLBX-62	Pole junction box mount kit for FB-Series cameras, including straps • IP66 cable management box with 1/2" conduit connection • Pole diameter range $\varnothing$ 64-216 mm (2 1/2-8 1/2") Junction box material Heavy-duty aluminum Strap, housing, and screw material Stainless steel Shipping box size 17.3 x 17.3 x 16.7 cm Shipping box weight 1.03 kg
421-0083-00	Dual-unit 180° wall mount kit for R-Series radars and DH-390 dome camera

CX-xxxx-G3 and -G32 Accessories

Part number / item code	Description and specifications	Images (not to scale)
CM-CAPS-G3	Pendant cap with 1.5" PF outer thread for: • Quasar Premium Bullet AI camera (CB-650x) • Quasar Premium Mini-Dome camera (CM-640x) • Ariel CM-3202 Mini-Dome camera—requires CM-4S-32 adapter plate • Saros DH-390 Dome camera Can use with • CX-ARMX-G3 wall mount bracket • CX-ELBX-G3 wall mount bracket with power box • CX-GSNK-G32 gooseneck pipe • CX-XTND-G3 extendable gooseneck mount Dimensions $\varnothing$ 172 x 102.5 mm ($\varnothing$ 6.77 x 4.04") Color FLIR White Shipping box size 19 x 19.5 x 12 cm (0.75 x 0.77 x 0.47") Shipping box weight 0.7 kg (1.54 lbs)	 With CM-640x Camera
CX-XTND-G3	Extendable gooseneck mount kit with cable box and wall mount plate (1.5" PF inner thread) Unit dimensions 900-1140 (L) x 256 (W) x 975 (H) mm (35.43-44.88 x 10.08 x 38.39") Unit weight 12.29 kg (27.09 lbs) Color White Shipping box size 89 x 54 x 15.5 cm (35.04 x 21.26 x 6.10") Shipping box weight 12.4 kg (27.34 lbs)	


Part number / item code	Description and specifications	Images (not to scale)
CX-ARMX-G3	Wall mount (1.5" PF inner thread) Can use with CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits Dimensions 249 (L) x 140 (W) x 227 (H) mm Color White Shipping box size 29 x 16 x 21 cm Shipping box weight 1.27 kg	
CX-ELBX-G3	Wall mount (1.5" PF inner thread) with IP66 electrical box enclosure Can use with CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits Dimensions 316 (L) x 185 (W) x 228(H) mm Color White Shipping box size 29.5 x 21.5 x 22 cm Shipping box weight 3.1 kg	

Part number / item code	Description and specifications	Images (not to scale)
CX-GSNK-G3	Gooseneck mount (1.5" PF inner thread) with IP66 electrical box enclosure - Attaches directly to a wall - Can use with CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits Dimensions 515 x 256 x 1043 mm Color White Shipping box size 89 x 54 x 15.5 cm Shipping box weight 13.55 kg	
CX-CRNR-G3	90-degree exterior angle corner mount kit Can use with CX-ELBX-G3 and CX-ARMX-G3 wall mount kits; and with CX-GSNK-G3 gooseneck mount Dimensions 404 (L) x 239 (D) x 200 (H) mm Color White Shipping box size 38 x 21 x 12.5 cm Shipping box weight 4.67 kg	
CX-POLE-G3	Pole mount kit, including straps Can use with CX-ELBX-G3 and CX-ARMX-G3 wall mount kits; and with CX-GSNK-G3 gooseneck mount Pole diameter range $\varnothing$ 150-230 mm (2.5-8.5") Dimensions 240 (L) x 161(w) x 72.5 (D) mm Color White Shipping box size 25 x 18 x 8 cm Shipping box weight 2.1 kg	
CX-POLE-G32	Pole mount kit, including straps, for use with CM-CAPX-W32 wall mount with pendant cap kit Dimensions 240 x 180 x 60 mm Pole diameter range $\varnothing$ 130~152mm Color Cool Gray 2C	
CX-GSNK-G32	Gooseneck mount kit, including base plate and pipe (1.5" PF inner thread) Can use with CX-GSNK-G32-B mounting bracket Dimensions $\varnothing$ 113 x 838 (L) x 450 (W) mm Weight 5.56 kg Color White Shipping box size 89 x 54 x 13 cm Shipping box weight 6.5 kg	

Part number / item code	Description and specifications	Images (not to scale)
CX-GSNK-G32-B	Gooseneck mounting bracket for use with CX-GSNK-G32 gooseneck mount kit Dimensions 220 (L) x 125 (W) x 47.5 (H) mm Weight 1.09 kg Color White Shipping box size 25 x 18 x 8 cm Shipping box weight 1.35 kg	
CX-DRP-G32-B	Ceiling mount kit, including base and 20cm drop-down pipe (1.5" PF inner thread) • Can use with CX-PIPE-G325 50 cm extension pipe Dimensions ø 165 x 257.5 mm Weight 0.94 kg Color White Shipping box size 21 x 10 x 21 cm Shipping box weight 1.02 kg	
CX-PIPE-G325	50cm long extender pipe (1.5" PF outer & inner threads) • Can use with CX-DRP-G32-B ceiling mount kit Dimensions ø 54 X 520 mm Weight 1.6 kg Color White Shipping box size 55 x 6.5 x 6.5 cm Shipping box weight 1.66 kg	Image not available




DH-Series Accessories


Part number / item code	Description and specifications	Images (not to scale)
421-0068-00 DH-PDST-00	Pendant mount shroud with 1.5" PF outer thread • For use with CM-3202-11-I camera, requires CM-4S-32 adapter plate • Can use with CX-xxxx-G3, -G32, and other 1.5" PF inner thread mounting hardware	

Part number / item code	Description and specifications	Images (not to scale)
421-0069-00 DH-PDST-01	Pendant mount kit, including 421-0068-00 pendant mount shroud and CX-ARMX-G3 wall mount bracket - For use with CM-3202-11-I camera, requires CM-4S-32 adapter plate - Attaches directly to a wall - Can use with DH-Series corner mount (421-0066-00) and pole mount (421-0067-00) kits - Can use with CX-CRNR-G3 corner mount and CX-POLE-G3 pole mount kits	
421-0066-00 DH-CRNR-00	Corner mount - Can use with DH-390 dome camera and with R-Series radar - Can use with 421-0069-00 pendant mount Overall dimensions (W x H) 262.34 x 139.4 mm Color FLIR White	
421-0067-00 DH-POLE-00	Pole mount kit, including straps - Can use with DH-390 dome camera and with R-Series radar - Can use with 421-0069-00 pendant mount Pole diameter range $\varnothing$ 150-230mm (6.0-9.0") Color FLIR White	

F-, FH-, PT-, and FC-Series Accessories

Part number / item code	Description and specifications	Images (not to scale)
500-1123-00	Wall mount assembly for F-Series cameras	
500-1120-00	Pedestal mount assembly for F-Series and FH-Series cameras Dimensions (H x W) 328mm (12.9") x $\varnothing$ 216 mm (8.5") Color FLIR White	
421-0086-00	Illuminator mount bracket for FH-Series cameras Dimensions 123 x 40 x 110 mm Color Black Shipping box size 178 x 165 x 140 mm (7 x 6.5 x 5.5 in) Shipping box weight 0.66 kg (1.45 lbs)	

Part number / item code	Description and specifications	Images (not to scale)
421-0087-00	Wall mount assembly for FH-Series cameras Dimensions 373.42 x 148 x 174.53 mm Weight 1.3 kg (2.87 lbs) Color White Shipping box size 420 x 180 x 130 mm (16.5 x 7 x 5 in) Shipping box weight 2.15 kg (4.75 lbs)	
500-1110-00	Wall mount assembly for PT-Series cameras	
500-1117-00	Pedestal mount assembly for PT-Series cameras Dimensions (base) ø 215.90 mm (8.5") Color FLIR White	
500-1116-00	Large pole mount kit, including straps, for use with: • 500-1123-00 F-Series wall mount assembly • 421-0087-00 FH-Series wall mount assembly • 500-1110-00 PT-Series wall mount assembly Pole diameter range ø 150-230 mm (6-9") Color FLIR White	
500-1121-00	Small pole mount kit for use with • 500-1123-00 F-Series wall mount assembly • 421-0087-00 FH-Series wall mount assembly • 4129742 FC-Series concealed cable wall mount Dimensions (H x W) 115 x 173 mm (4.5 x 6.8") Pole diameter range ø 65-110 mm (2.6-4.3") Color FLIR White	
500-1119-00	Corner mount kit for use with: • 500-1123-00 F-Series wall mount assembly • 421-0087-00 FH-Series wall mount assembly	
500-1118-00	Corner mount kit for use with 500-1110-00 PT-Series wall mount assembly	

Part number / item code	Description and specifications	Images (not to scale)
4129742	Wall mount assembly for FC-Series cameras	
4132982	Large pole mount kit for use with 4129742 wall mount assembly • Concealed cables • Pole diameter range ø 75-180 mm (3-7") Bracket material Aluminum Bracket finish Clear hardcoat anodize	

9 Power Accessories

The following power accessories are available for FLIR Security cameras and other devices.

PoE Injectors

Part number / item code	Description and notes	Images (not to scale)
CP-POE-90W-US Microsemi product: PD-9601GC/AC-US	Inline 90W over 4 pairs Power over Ethernet (PoE) injectors - Support FLIR Security devices that can be powered by PoE: - IEEE 802.3bt Type 4-compliant - PD-9501GR/AC: IEEE 802.3at-compliant - Teledyne FLIR CP-POE-90W-US is Microsemi product PD-9601GC/AC-US. Other Microsemi power cord options: -UK, -BR (Brazil), -AU (Australia), -JP (Japan) 100-240VAC input	
CP-POE-4P-60W-US Microsemi products: PD-9501GC/AC PD-9501GR/AC	Inline 60W over 4 pairs Power over Ethernet (PoE) injectors - Support FLIR Security devices that can be powered by PoE: - CP-POE-4P-60W-US / PD-9501GC/AC: IEEE 802.3bt-compliant - PD-9501GR/AC: IEEE 802.3at-compliant - Teledyne FLIR CP-POE-4P-60W-US is the Microsemi PD-9501GC/AC-US. Other Microsemi power cord options: -EU (Europe), -UK, -BR (Brazil), -AU (Australia), -JP (Japan) 100-240VAC input	
4210755 FC-PWR-00	Inline 30W IEEE 802.3at PoE injector - Supports FLIR Security edge devices that can be powered by PoE IEEE 802.3at. Does <i>not</i> support: - CP-6xxx - DM-Series - DX-Series - FH-Series 100-240VAC input	
T911183	Gigabit 16W PoE IEEE 802.3af injector with multiple plugs - Supports R-Series 100-240VAC input	

24VAC Power Supply

Part number	Description and notes	Image (not to scale)
4124857	UL-listed and -approved 300W 24VAC power supply for F-Series, PT-Series, FH-Series, DX-Series, DM-Series, and CP-6xxx cameras Ratings: NEMA 4X weather-resistant enclosure Input: 115VAC 60Hz @ 3A, or 230VAC 50Hz @ 1.5A Output: 24VAC @ 12.5 Amps, or 28VAC @ 10 Amps Fuse rating: 10A/32V Safety: UL / CUL	
T912422	UL approved 24VAC power supply for FH-series R PTZ Input: 100- 240VAC @ 2.6A 50/60Hz Output: 24 VDC 10A Operating Temperature: -25°C ~ 70°C Certification: CE, FCC, RoHS	

10 Discontinued Accessories

The following accessories are no longer available:

Discontinued part / item	Suggested replacement(s)
CP-POE-90W-EU	N/A - Other market variations remain available; for example, CP-POE-90W-US
CX-POLE-G63	N/A - Adapter for end-of-life accessories
CF-ENCL-63E-0	N/A - End-of-life
CF-ENCL-63E-I	N/A - End-of-life
CF-L304-11-P	Product end of life by supplier
CM-CLEAR-31-01	N/A - Accessory for end-of-life product
CF-L131-31	N/A - Accessory for end-of-life product
CX-PRWR-241	4124857 UL-listed and -approved 24VAC power supply
CF-L131-05-50	N/A - Accessory for end-of-life product
500-0463-00 pedestal mount	500-1120-00 pedestal mount
421-0057-00	De-ice kit for FC Series lens 75mm