


PROFESSIONAL BIDIRECTIONAL DIAGNOSTIC TOOL



OE-LEVEL DIAGNOSTICS ON YOUR SMART DEVICE

IMPORTANT: Before using the device, please read the precautions in the operating guide or the user manual thoroughly. Improper operation or use in an unsuitable environment may result in personal loss and void the warranty.

Product Walkaround

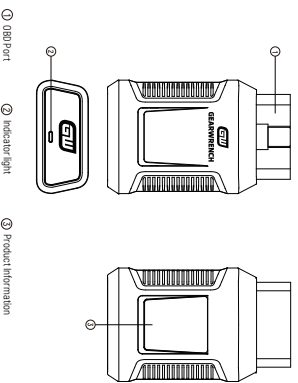

Specifications


Items	Specifications
Processor	ARM Cortex-M4
Indicator	Green light on: Power on Green light flashing: Firmware updating Blue light on: Device paired Blue light flashing: Device communicating Red light: Device error
Working Voltage	DC 7-36V
Working Temp.	-20-60°C / -4-140°F

Scan the below QR code to download the free GWSMARTBI app




Getting Started

1

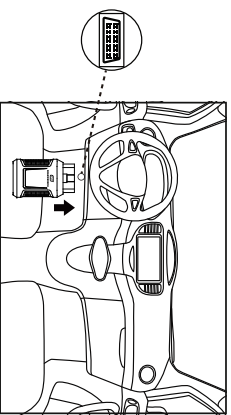


Connect the Vehicle Control Interface (VCI) to the vehicle's OBDII port.

2

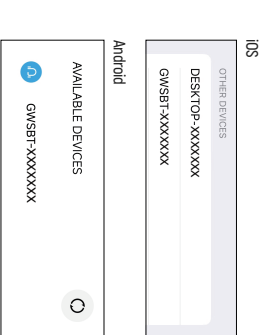

Open the system settings on your mobile device and tap on Bluetooth. Look for a device with a name that matches the S/N on your GWSMARTBI. Tap on it to pair with the device.

3

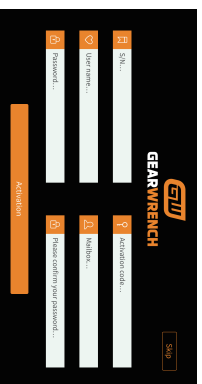

Start the GWSMARTBI app and enter the serial number (S/N) of your device, the activation code from your Product Identification Information card, and your preferred username, email address, and password. After entering this information, hit the 'Activate' button to finalize your device's registration.

4



Navigate to the 'More' section within the GWSMARTBI app, select 'Settings', then 'Bluetooth'. Locate the device you've recently paired; it will be indicated by a blue light, signaling a successful connection. Once this is confirmed, you're all set for diagnostics.