

Hawk 3 Digital Panel Meter / Controller



File # E199939



- All parameters set from easy to understand front panel access
- One, two or four 5-amp relays optional
- Five user-selectable brightness levels
- 1/8 DIN, shallow depth case, 3.24"
- RS485 digital communications optional (H345)
- 12 or 24 DCV Excitation output optional, maximum 30mA @ 12V and 20mA @ 24V
- 4-20mA or 0-10 DCV analog retransmission optional
- NEMA 4X rated front panel

Hawk 3 Digital Panel Meter / Controller

Specifications

DISPLAY	
Type	7- segment, red LED, 4 or 5 digits
Height	0.56" (14.2mm)
Brightness	5 settings, user programmable
Decimal Point	4 or 5 position, user programmable
Overrange Indication	Display flashes "EEEE" indicating Maximum Value Exceeded (Example: H335)
Underrange Indication	Display flashes "-EEE" indicating Minimum Value Exceeded (Example: H335)
Alarm Indicators	4 LED indicators for up to four independent setpoints
Linearization	H335 2 points H345 16 points


POWER REQUIREMENTS		
AC	85 to 250 VAC or 120VAC @ 10VA	
DC	9 to 36 DCV @ 10VA	
Isolation	250V RMS MAX	
Note: Each supply is shown at the maximum and minimum values except the 120 VAC unit, which is allowed ± 10%		
ACCURACY @ 25°C as % of rdg		
	4-1/2 digit	3-1/2 digit
DC Current		
High (5A, 2A)	± 0.2% of reading ± 1 count	± 0.3% of reading ± 1 count
All others	± 0.05% of reading ± 1 count	± 0.1% of reading ± 1 count
DC Volts		
High (600V)	± 0.1% of reading ± 1 count	± 0.2% of reading ± 1 count
All others	± 0.05% of reading ± 1 count	± 0.1% of reading ± 1 count
Resistance		
All ranges	± 0.1% of reading ± 2 counts	± 0.1% of reading ± 2 counts
* AC Current		
High (2A, 5A)	± 0.2% of reading ± 2 counts	± 0.3% of reading ± 2 counts
All others	± 0.1% of reading ± 2 counts	± 0.2% of reading ± 2 counts
* AC Volts		
High (600V)	± 0.1% of reading ± 1 count	± 0.2% of reading ± 1 count
All others	± 0.05% of reading ± 1 count	± 0.1% of reading ± 1 count
* AC functions measured at 50 hz, include ± 1 count for each additional 100 Hz above 50 Hz		

Specifications - Con't	
ENVIRONMENTAL	
Operating Temperature	0 to 50°C
Storage Temperature	-10 to +60°C
Relative Humidity	< 80% for the temp. up to 31°C and decreasing linearly to 50% relative humidity at 50°C
Ambient Temp	25°C
Temperature Drift	± 100 ppm /°C
Warmup time	10 minutes
NOISE REJECTION	
NMRR	60 dB @ 50-60 Hz
CMRR	70 db @ 50-60 Hz
For indoor use to an altitude up to 200m	
A TO D CONVERSION	
Technique	Successive approximation with oversampling
Sample Rate	10 conversions per second
Display Rate	User Programmable from 1 - 420 updates / minute (240 default)
RS-485 Specications (only available on H345)	
2 wire / Half duplex, Baud rate: 9600 baud, 1ms delay per character, 32 Nodes Maximum on Bus. Optically and magnetically isolated for ground loop elimination	
MECHANICAL	
Bezel	3.92" x 2.0" x 0.52" (99.8mm x 51.9mm x 132mm)
Depth	3.24" (82.3mm) behind panel
Panel cutout	3.62" x 1.77" (92mm x 45mm) 1/8 DIN
Weight	10 oz. (283.5 g)
Cover	NEMA 4X Rated front panel
ELECTRICAL	
Accuracy	Listed as % of reading at 25°C. Add 100ppm/°C to compensate for drift. Tested at 50Hz, include +/-1 count for every 100Hz above 50 Hz
Transient Overvoltage	Installation Category III, Pollution Degree 2
Analog Output	Sampling Rate = 100 mSec. Reaction Time 0 to Full Scale = 10 μ Sec

Hawk 3 Digital Panel Meter / Controller

Ordering Information -



Hawk 3 Indicators can be configured by making an entry into each section. Example: H335-3-71-0-4-1

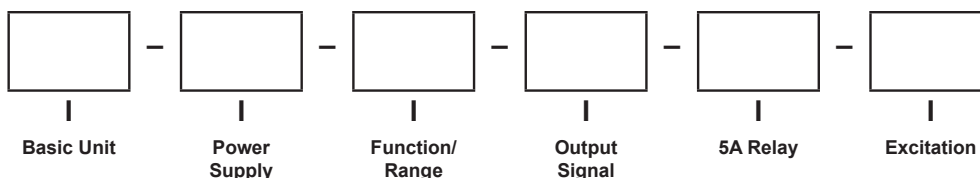

Select From Each One Below									
Basic Unit			Function/Range			Output Signal			
	H335	3-1/2 digit, Red LED		41	200 ACμA		0	None	
	H345	4-1/2 digit, Red LED		42	2 ACmA		1	4-20 DCmA	
				43	20 ACmA		2	0-10 DCV	
				44	200 ACmA		6	RS-485 (4-1/2 only)	
				45	2 ACA				
				46	5 ACA				
	1	120 ACV (3-1/2 only)		51	200 ACmV TRMS		0	None	
	2	85-250 ACV (4-1/2 only)		52	2 ACV TRMS		1	One	
	3	9-36 DCV		53	20 ACV TRMS		2	Two	
	4	85-250 ACV (3-1/2 only)		54	200 ACV TRMS		4	Four	
				55	600 ACV* TRMS				
	11	200 DCmv		61	200 ACμA TRMS		0	None	
	12	2 DCV		62	2 ACmA TRMS		1	12 DCV	
	13	20 DCV		63	20 ACmA TRMS		2	24 DCV	
	14	200 DCV		64	200 ACmA TRMS				
	15	600 DCV *		65	2 ACA TRMS				
				66	5 ACA TRMS				
	21	200 DCμA		71	4-20 DCmA Process				
	22	2 DCmA		72	0-10 DCV Process				
	23	20 DCmA							
	24	200 DCmA							
	25	2 DCA							
	26	5 DCA							
	31	200 ACmV		81	200 Ohm				
	32	2 ACV		82	2K Ohm				
	33	20 ACV		83	20K Ohm				
	34	200 ACV		84	200K Ohm				
	35	600 ACV							
* Awaiting UL approval									

Hawk 3 Digital Panel Meter / Controller

Installation and Panel Cutout - H335, H340, H345




Mounting Requirements

The Hawk 3 Advanced Digital Controller 1/8 DIN meters require a panel cutout of 1.77" (45mm) high by 3.62" (92mm) wide.

To install the Hawk 3 meter into a panel cutout, remove the clips from the side of the meter.


Slide the meter through the panel cutout, then slide the mounting clips back on the meter. Press evenly to ensure a proper fit. Tighten screws.

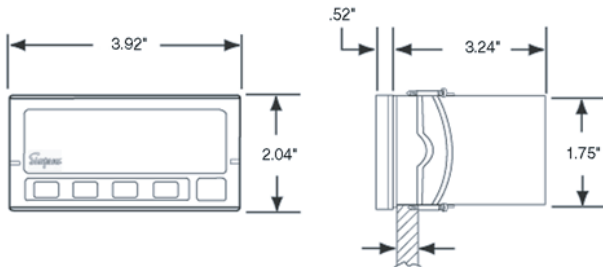

Engineering Label Placement

To replace the engineering unit label, place the tip of a ballpoint pen into the small hole at the base of the engineering label in the bezel.

Slide the label up until it pops out. Grasp and remove. Slide the new label half the distance in, then use the ballpoint pen to slide it down into place.

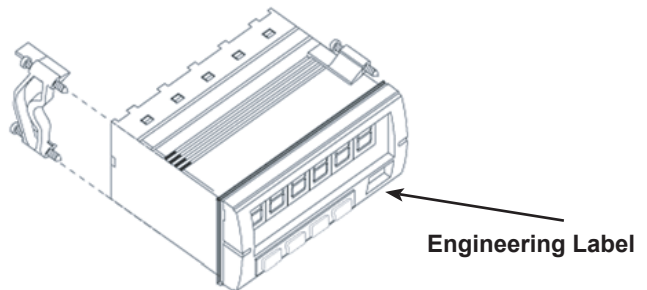

Hawk 3 Digital Panel Meter / Controller

Inputs

DC Voltage				
Range	Resolution 4-1/2	Resolution 3-1/2	Input Impedance	Overload
200 mV	10 μ V	.1 mV	1M Ω	5 DCV
2 V	.1 mV	1 mV	1M Ω	5 DCV
20 V	1 mV	10 mV	1M Ω	300 DCV
200 V	10 mV	.1 V	1M Ω	300 DCV
600 V	.1 V	1 V	1M Ω	1K DCV

AC Voltage (same for TRMS @ 60 Hz)				
Range	Resolution 4-1/2	Resolution 3-1/2	Input Impedance	Overload
200 mV	10 μ V	.1 mV	200K Ω	5 DCV
2 V	.1 mV	1 mV	200K Ω	5 DCV
20 V	1 mV	10 mV	1M Ω	300 DCV
200 V	10 mV	.1 V	1M Ω	300 DCV
600 V	.1 V	1 V	1M Ω	1K DCV

DC Current				
Range	Resolution 4-1/2	Resolution 3-1/2	Input Impedance	Overload
200 μ A	10 nA	.1 μ A	1K Ω	4.5 mA DC
2 mA	.1 μ A	1 μ A	100 Ω	45 mA DC
20 mA	1 μ A	10 μ A	10 Ω	200 mA DC
200 mA	10 μ A	.1 mA	1 Ω	600 mA DC
2 A	.1 mA	1 mA	.013 Ω	5.5 A DC
5 A	1 mA	10 mA	.013 Ω	5.5 A DC

AC Current (same for TRMS @ 60 Hz)				
Range	Resolution 4-1/2	Resolution 3-1/2	Input Impedance	Overload
200 μ A	10 nA	.1 μ A	1K Ω	4.5 mA DC
2 mA	.1 μ A	1 μ A	100 Ω	45 mA DC
20 mA	1 μ A	10 μ A	10 Ω	200 mA DC
200 mA	10 μ A	.1 mA	1 Ω	600 mA DC
2 A	.1 mA	1 mA	.013 Ω	5.5 A DC
5 A	1 mA	10 mA	.013 Ω	5.5 A DC

Resistance				
Range	Resolution 4-1/2	Resolution 3-1/2	Input Impedance	Overload
200 Ω	10 m Ω	.1 Ω	1.2K Ω	$\pm$ 5 DCV
2K Ω	.1 Ω	1 Ω	12K Ω	$\pm$ 5 DCV
20K Ω	1 Ω	10 Ω	121K Ω	$\pm$ 5 DCV
200K Ω	10 Ω	100 Ω	1.2M Ω	$\pm$ 5 DCV