

The Tramex Hygro-i ® relative humidity probe is the most advanced, resilient and reusable RH probe on the market today, allowing the user to perform in situ and hood type RH testing to comply with international standards BS 8201, 8203, 5325 and ASTM F2170, F2420 for the Flooring Industry, and is ideal for use by Flood & Water Damage Restoration and Indoor Air Quality professionals.

MEETING THE STANDARDS

For the evaluation of moisture conditions of concrete and other floor slabs, and ambient air conditions, by relative humidity measurement as per international standards BS 8201, 8203, 5325 and ASTM F2170, F2420.



Hygro-i-EU 05/14 REV.1.1




The Hygro-i ® probe is available in packs of:

Number of probes	Product code
1	HIPP1
3	HIPP3
6	HIPP6
12	HIPP12
25	HIPP25
50	HIPP50
100	HIPP100

FEATURES

- Fast acclimation time.
- Reusable Hygro-i ® Relative Humidity probes prove to be the lowest cost per BS 8201 and ASTM F2170 tests.
- Accurate, durable and best in class.
- Giving in situ relative humidity and ambient RH, temperature, dew point temperature & grams per kilo mixing ratio shown simultaneously on the clear display.
- Relative Humidity range: 0% to 99%
- Temperature Range: -40°C to 80°C (-40°F to 176°F)

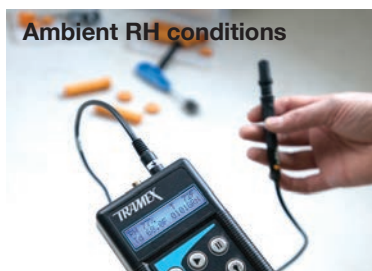

1.800.561.8187

www.itm.com

information@itm.com

PRODUCT DESIGN

Used in conjunction with the Tramex CMEX II or the Tramex MRH III non-destructive moisture meters, the Hygro-i® probe provides measurements of relative humidity, temperature, dew point and grams per kilo in structural materials such as concrete flooring and walls, as well as the ambient conditions within the building envelope, all shown simultaneously on one clear display.

The Hygro-i® probes are reusable, paying for themselves after a few uses compared to single-use, disposable RH probes. Calibration checks can be carried out at any time using the calibration check salts.

INSTRUMENTS

The Hygro-i® probe is used with the CMEX II or the MRH III for relative humidity testing of flooring slabs and ambient conditions.



Product order code: CMEX2



Product order code: MRH3

TESTS


The Hygro-i® probe is used to carry out in situ RH tests and hood RH tests per BS 8201, 8203, 5325 and ASTM F2170, F2420.

SPECIFICATIONS

Hygro-i® probe

Reusable Ambient RH Probe tests:	Temperature, RH %, Dew Point, Mixing Ratio
Humidity Range:	0% - 99% RH
Temperature Range:	-40°C to 80°C (-40°F to 176°F)
RH Response time:	8 sec
Temperature Response time:	min. 5 secs. - max. 30 secs.
Humidity Accuracy:	10% to 90%RH +/-1.8% @ 25°C / 77°F
Temperature Accuracy:	+/- 0.5°F / 0.3°C
NIST traceable.	(National Institute of Standards and Technology)

HOW IT WORKS

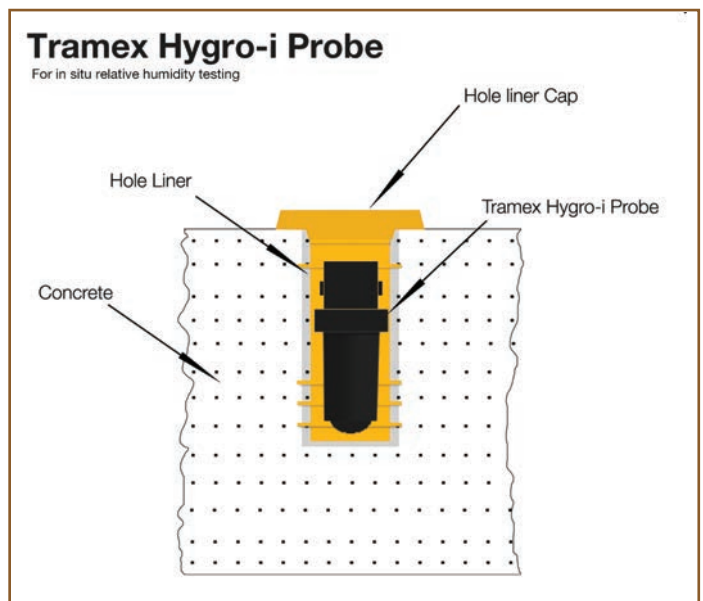

KITS

The Hygro-i® Probe is an integral part of the following kits:

- Concrete Inspection Kits
- Flooring Inspection Kits
- Roof Inspection Kits
- Water Damage Restoration Kits
- Indoor Air Quality Kits

