

METRAHIT | 27M, 27I and H+E CAR

Milliohm Resistance Meter and Digital Multimeter, Insulation Tester and Data Logger

3-349-206-03
11/8.14

- The **METRA HIT 27M** is a compact milliohm resistance meter plus multimeter and thermometer for the measurement of low-value contact resistance on aircraft outer skins (lightning protection, wick test), and for general low-resistance measurements.
- The **METRA HIT 27I** is used additionally for service and repair work performed on airplane and helicopter electrical systems (voltage, insulation, milliohm and temperature measurement). In addition to its own multimeter functions for electrical quantities, the instrument also includes a mega-ohm measuring function with insulation test voltages of 50, 100, 250 and 500 V, as well as temperature measurement with Pt100 and Pt1000 sensors.
- **METRA HIT H+E CAR** Megatester for service and repair of electric and hybrid vehicles (features and technical data identical with METRA HIT 27I)



METRA HIT 27M Features

- **All-in-one:**
Milliohm resistance meter, multimeter and data logger
Compact and rugged for service under harsh conditions and laboratory use, a single device for many applications
- **Kelvin connection (4-wire measurement)**
Suppresses influence from conductor and contact resistances on measuring results
- **Measuring current can be selected according to the measuring task:**
Adaptation to various resistance measuring requirements and optimized battery service life
- **DATA Hold**
For quick, reliable measurement and storage of individual measured values, e.g. voltages at discrete cells in batteries and emergency power supplies
- **Overload protection**
Protects the instrument in the event of inadvertent connection to mains power
- **DAkkS calibration certificate as standard feature**
Reduced operating costs for use within ISO 9000 quality systems, documented traceability
- **Operation with storage batteries**
3 NiMH storage batteries are included as a standard feature.

METRA HIT 27I / METRA HIT H+E CAR Features

Includes all METRA HIT 27M functions plus:

- **Insulation resistance tester**
Testing with 50 to 500 V for components, cables and conductors, for example in aircraft and in on-board electrical systems
- **LCD panel with background illumination**
High contrast, even under adverse ambient light conditions
- **Compact and multifunctional**
Can be used advantageously in aircraft cockpits as well as in other constricted spaces, which would otherwise require the use of several individual instruments.
- **Mains power or storage battery operation**
Furnished with 3 NiMH storage batteries and a mains power battery charger as standard equipment for optimized instrument availability and low operating costs
- **DAkkS calibration certificate as standard feature**
Reduced operating costs for use within ISO 9000 quality systems, documented traceability

Special version for use in explosive atmospheres: **METRA HIT | 27EX**, see separate datasheet.

METRAHIT | 27M, 27I and H+E CAR

Milliohm Resistance Meter and Digital Multimeter, Insulation Tester and Data Logger

Applications

The METRA HIT 27 is a compact, rugged and reliable instrument, which is equally suitable for precision measuring and recording tasks in the factory, for on-site service and in the laboratory:

- Adjustment of shunts in instrumentation
- Testing of electrical connections at conductor bars for open-pit mining, in potential bonding systems, and for industrial and household applications
- Testing of cable resistance, wiring, shunt resistors in PCBs and thick-film circuits
- Measurement of contact resistance in relays, contactors and power interrupters
- Testing of resistance in fuses, as well as conductor resistance in heavy current circuits
- Testing of winding resistance in transformers, coils, small motors etc.
- Testing of discharge resistance on aircraft, and at aircraft outer skin components
- Contact resistance testing in uninterruptible power supplies
- Measurement of cell voltages, for example in on-board batteries and emergency power supplies
- Contact resistance testing at welding seams

The new **METRA HIT H+E CAR** (hybrid & E-CAR) is a measuring instrument for testing the electrical safety of electric and hybrid vehicles. It includes, among others, the following tests and measurements:

- Protection against direct contact during charging and discharging
- Protection against indirect contact during discharging (battery in the vehicle) and charging of the traction battery
- Insulation and dielectric strength (insulation resistance between all electric components of the high voltage system and the vehicle frame)
- Insulation of the battery (insulation resistance between the high voltage battery poles and the metallic tray/vehicle frame)
- Voltage of capacitors
- Protection type of electric equipment
- Testing of charging regulators
- Testing of electric motor (nominal voltage, power, speed)

General


The METRA HIT 27 milliohm resistance meters are the modern alternative for the well known TH2 (Thomson) and Wh2 (Wheatstone) measuring bridges. They provide an expanded measuring range, greater accuracy and easier reading. As universal measuring and test instruments, they acquire and record values to an integrated memory module including resistance in the milliohm and micro-ohm ranges, as well as "normal multimeter resistance values" in the ohm to mega-ohm ranges by feeding a measuring current to the resistor, conductor or contact under test. The respective measuring current is determined by the rotary selector switch setting and lies within a range of 1 to 0.02 A in the milliohm ranges. The instrument also measures and records insulation resistance (METRA HIT 27I only) with test voltage selectable in steps, for example in order to test resistance in on-board electrical systems for aircraft, ocean going

Easy Operation

Operation is very easy. Simply connect the low-resistance device under test to the instrument with the included measurement cables, Kelvin clips or 4-pole probes (KC27), and select the ideal measuring range.

Integrated Measured Value Memory and Interface

Each METRA HIT 27 is equipped with a measured value memory module and can thus be utilized as a data logger or a recording instrument for all measuring functions. Measurement results can be transmitted to a PC either off-line via the optical interface which is furnished as standard equipment, or online with an optional bidirectional adapter. In this way, for example, characteristic voltage and temperature curves (see figure below) can be displayed and analyzed in line recorder format relative to real-time, or individual measured values, e.g. voltages for each of the cells in a storage battery, can be saved with the DATA Hold function and analyzed at a PC in tabular form.

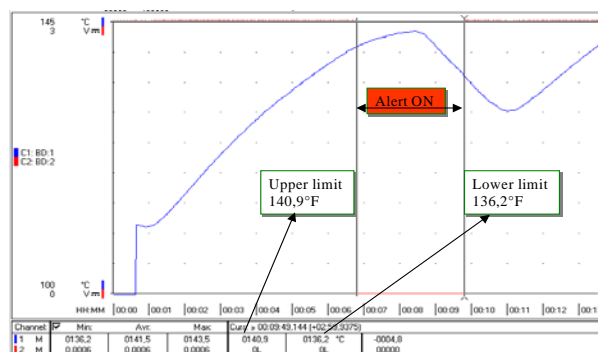

METRAwin®10/METRA HITMETRAwin®10/METRA HIT (software option):

Recorded characteristic temperature curve and triggering characteristics (2-channel recording with 2 METRA HIT instruments) plus evaluation at a PC

METRAwin®10/METRA HIT Software Option

Measurement data recorded to the measured value memory module can be evaluated at a PC if required with the help of the IR interface supplied as standard equipment and a bidirectional IR adapter (BD adapter) with conversion to the RS 232 protocol.

METRAwin®10/METRA HIT software (see above figure) is recommended to this end, and is suitable for display, analysis and documentation of measurement results using Windows® XP, VISTA or 7. The software is available as an accessory. User-friendly complete packages (e.g. the BD Pack or the complete METRA HIT 27 AS case) are easy to connect and install and include everything required for high performance measurement data processing.

Offset Balancing

Automatic offset balancing is provided for the lower measuring ranges. Manual offset balancing, as required with the METRA HIT 17 predecessor model, is thus no longer necessary.

Protection Against Operator Error

The METRA HIT 27 is safeguarded against erroneous short-term connection to devices under test with fault voltages of up to 600 V by means of protective devices.

Test Functions and Automatic Functions

All METRA HIT 27 instruments are equipped with diode and

METRAHIT | 27M, 27I and H+E CAR

Milliohm Resistance Meter and Digital Multimeter, Insulation Tester and Data Logger

Protective Cover for Harsh Conditions

The device features a very compact, rugged design. Beyond this, it is protected against damage in the event of impacts or dropping

by means of a soft rubber cover with tilt stand. The rubber material also assures that the instrument does not wander if it is set up on a vibrating surface.

Characteristic Values

| Measuring Function | Measuring Range | Resolution at Upper Range Limit 4% 30000 / 3% 3000 ¹⁾ | | Input Impedance | | Intrinsic Uncertainty at Max. Resolution under Reference Conditions | | Overload Capacity ³⁾ | |
|--------------------|-----------------------|---|--------------------------------|---|----------------------------------|---|----------------------------------|---------------------------------|--|
| | | | | | | ±(... % rdg. + ... d) | ±(... % rdg. + ... d) | | |
| | | | | | | DC | AC ⁶⁾ | | |
| V | 3 V | 100 μV | 2.1 MΩ | 2.1 MΩ // < 50 pF | 0.1 + 10 ⁴⁾ | 0.2 + 10 (>500 d) | 600 V | Cont. | |
| | 30 V | 1 mV | 2.1 MΩ | 2.1 MΩ // < 50 pF | 0.1 + 5 | 0.2 + 10 (>500 d) | DC | | |
| | 300 V | 10 mV | 2.1 MΩ | 2.1 MΩ // < 50 pF | 0.1 + 5 | 0.2 + 10 (>500 d) | AC | | |
| | 600 V | 100 mV | 2.1 MΩ | 2.1 MΩ // < 50 pF | 0.1 + 5 | 0.2 + 10 (>500 d) | eff sine | | |
| | | | Open-Circuit Voltage | Measuring Current, Approx. | ±(... % rdg. + ... d) | | | | |
| mΩ @1A (4 L) | 3 mΩ | 0.001 mΩ | 3.5 ... 4 V | 1 A ⁷⁾ | 1 + 10 | | ±0.6 V ¹¹⁾ | Cont. | |
| | 30 mΩ | 0.001 mΩ | 3.5 ... 4 V | 1 A ⁷⁾ | 0.5 + 10 (Valid as of 10% of R) | | | | |
| | 300 mΩ | 0.01 mΩ | 3.5 ... 4 V | 1 A ⁷⁾ | 0.5 + 10 | | | | |
| mΩ (4 L) | 30 mΩ | 0.01 mΩ | 3.5 ... 4 V | 200 mA | 0.25 + 10 | | ±0.6 V ¹¹⁾ 4) | Cont. | |
| | 300 mΩ | 0.01 mΩ | 3.5 ... 4 V | 200 mA | 0.25 + 10 (Valid as of 10% of R) | | | | |
| | 3 Ω | 0.1 mΩ | 3.5 ... 4 V | 20 mA | 0.25 + 10 | | | | |
| | 30 Ω | 1 mΩ | 3.5 ... 4 V | 20 mA | 0.25 + 10 | | | | |
| Ω (2 L) | 300 Ω | 10 mΩ | 3.5 ... 4 V | 1 mA | 0.1 + 10 ⁴⁾ | | 600 V DC AC eff sine | max. 10 s | |
| | 3 kΩ | 100 mΩ | 3.5 ... 4 V | 100 μA | 0.1 + 5 ⁴⁾ | | | | |
| | 30 kΩ | 1 Ω | 3.5 ... 4 V | 20 μA | 0.1 + 5 | | | | |
| | 300 kΩ | 10 Ω | 3.5 ... 4 V | 20 μA | 0.1 + 5 | | | | |
| | 3 MΩ | 100 Ω | 3.5 ... 4 V | 10 μA | 0.1 + 5 | | | | |
| | 30 MΩ | 1 kΩ | 3.5 ... 4 V | 10 μA | 1.5 + 10 | | | | |
| Ω ₀) | 300 Ω | 0.1 Ω | 3 V | 1 mA | 1 + 5 | | | | |
| → | 3 V | 0.1 mV | 3 V | 1 mA | 1 + 5 | | | | |
| MΩ @ ... V | | | Test Voltage | Measuring Current | | | | | |
| | 30 MΩ | 0.01 MΩ | 50/100/250/500 V | < 1.5 mA | 2 + 10 | | 600 V DC/AC | max. 10 s | |
| | 300 MΩ | 0.1 MΩ | 50/100/250/500 V | | 2 + 10 | | | | |
| | 3000MΩ ¹⁰⁾ | 1 MΩ | 50/100/250/500 V | | 3 + 10 | | | | |
| | | | f _{min} ²⁾ | | ±(... % rdg. + ... d) | | | | |
| Hz | 300 Hz | 0.01 Hz | 1 Hz | | 0.05 + 5 ⁵⁾ | | 600 V AC | Cont. | |
| | 3 kHz | 0.1 Hz | | | | | | | |
| | Temperature Sensor | Measuring Range | Resolution | Intrinsic Uncertainty at Max. Resolution under Reference Conditions ±(... % rdg. + ... d) ⁸⁾ | | | | | |
| °C / °F | Pt 100 ⁹⁾ | -200.0 ... +100.0 °C | 0.1 °K | 1 K + 5 | | 600 V DC AC eff sine | max. 10 s | | |
| | | +100.0 ... +600.0 °C | | 0.5 + 5 | | | | | |
| | Pt 1000 | -200.0 ... +100.0 °C | | 1 K + 5 | | | | | |
| | | +100.0 ... +600.0 °C | | 0.5 + 5 | | | | | |
| | Ni 100 | -60.0 ... +180.0 °C | | 0.5 + 5 | | | | | |
| | Ni 1000 | -60.0 ... +180.0 °C | | 0.5 + 5 | | | | | |

- 1) Display: 3% places in following ranges: 3 mΩ @ 1A, 30 mΩ, Ω₀, MΩ@...V, a different sampling rate can also be selected in the rAtE menu for saving and transmitting measured values.
- 2) Lowest measurable frequency for sinusoidal measuring signals symmetrical to the zero point
- 3) At 0° to + 40° C
- 4) ZERO is displayed for "zero balancing" function.
- 5) Range 3 V~: U_E = 0.15V_{eff/rms} ... 3 V_{eff/rms}
30 V~: U_E = 1.5V_{eff/rms} ... 30 V_{eff/rms}
300 V~: U_E = 15 V_{eff/rms} ... 300 V_{eff/rms}
600 V~: U_E = 300 V_{eff/rms} ... 600 V_{eff/rms}
For voltages > 100 V: power limiting of 1.8 · 10³ V · Hz
- 6) 20 ... 45 ... 65 Hz ... 1 kHz sine, see influences on page 4.
- 7) Pulsating measuring current with interval of T = 1 s
- 8) Plus sensor deviation
- 9) Temperature value is based upon the characteristic curve per EN 60751.
- 10) In the case of high resistance values of greater than 300 MΩ, the capacitive influence of the person performing the measurement or the measurement cable may distort the measured value. Use short or shielded measurement cables for this reason.
- 11) In the event of an overcharge, the integrated 5E 1.6 A/1000 V fuse blows.

Key

rdg. = reading (measured value), R = measuring range, d = digit(s),
2/4 L = 2/4-wire measurement

Applicable Regulations and Standards

| | |
|--|--|
| IEC 61010-1 DIN EN 61010-1 VDE 0411 Part 1 | Safety requirements for electrical equipment for measurement, control and laboratory use Part 1: General requirements |
| EN 60529 VDE 0470-1 | Test instruments and test procedures Protection provided by enclosures (IP code) |
| DIN EN 61326-1 VDE 0843-20-1 | Electrical equipment for measurement, control and laboratory use – EMC requirements – Part 1: General requirements |

1.800.561.8187

www.itm.com

information@itm.com

METRAHIT | 27M, 27I and H+E CAR

Milliohm Resistance Meter and Digital Multimeter, Insulation Tester and Data Logger

Influencing Quantities and Influence Error

| Influencing Quantity | Sphere of Influence | Measured Quantity / Measuring Range ¹ | Influence Error $\pm (... \% \text{ rdg.} + d) / 10 \text{ K}$ |
|----------------------|--------------------------------------|--|--|
| Temperature | 0 ... +21 °C and +25... +40 °C | V DC | 0.1 + 5 |
| | | V AC | 0.5 + 5 |
| | | mΩ @ 1 A 4L | 1 + 5 |
| | | mΩ @ 200 mA 4L | 1 + 5 |
| | | 300 Ω ... 300 kΩ 2L | 0.2 + 5 |
| | | 3 MΩ 2L | 0.5 + 5 |
| | | 30 MΩ 2L | 1 + 5 |
| | | Insulation, 30 MΩ ... 3 GΩ | 2 + 5 |
| | | Hz | 0.1 + 5 |
| | | °C (RTD) | 0.5 + 10 |

¹ With zero balancing

| Influencing Quantity | Frequency | Measured Quantity / Measuring Range | Influence Error ¹ $\pm (... \% \text{ rdg.} + d)$ |
|------------------------------|-------------------|-------------------------------------|--|
| Frequency V _{AC} | > 20 Hz ... 45 Hz | 3 V to 600.0 V | 2 + 10 |
| | > 65 Hz ... 1 kHz | | |

¹ Specified error valid as of display values of 10% of the measuring range

| Influencing Quantity | Sphere of Influence | Measured Quantity / Measuring Range ¹ | Influence Error |
|----------------------|---------------------------------|--|---------------------|
| Relative Humidity | 75% 3 days instrument off | all measured quantities | 1 x intrinsic error |

¹ With zero balancing

| Influencing Quantity | Sphere of Influence | Measuring Range | Damping $\pm \text{dB}$ |
|----------------------------------|--|-----------------|-------------------------|
| Common Mode Interference Voltage | Interference quantity max. 600 V ~ 50 Hz, 60 Hz sine | V DC | > 90 dB |
| | | 30 V ~ | > 80 dB |
| | | 300 V ~ | > 70 dB |
| | | 600 V ~ | > 60 dB |
| Series Mode Interference Voltage | Interference quantity: V~, respective nominal value of the measuring range, max. 600 V ~, 50 Hz, 60 Hz sine | V = | > 60 dB |
| | | V ~ | > 60 dB |

Real-Time Clock

| | |
|-----------------------|---------------------|
| Accuracy | ±1 minute per month |
| Temperature Influence | 50 ppm/K |

Reference Conditions

| | |
|------------------------------|--|
| Ambient temperature | +23 °C ± 2 K |
| Relative humidity | 40 ... 60% |
| Measured quantity frequency | 45 ... 65 Hz |
| Measured quantity wave shape | Sinusoidal, deviation between RMS and rectified value < 0.1% |
| Storage battery voltage | 3.6 V ± 0.2 V |

Response Time (after manual range selection)

| Measured Quantity / Measuring Range | Response Time for Digital Display | Measured Quantity Step Function |
|-------------------------------------|-----------------------------------|---|
| V DC, V AC | 1.5 s | from 0 to 80% of upper range limit value |
| mΩ @ 1 A 4L | 2 s | from ∞ to 50% of upper range limit value |
| mΩ | 1.5 s | |
| 300 Ω ... 3 MΩ | 2 s | |
| 3 GΩ * | 5 s | |
| ↔ Continuity | < 50 ms | |
| ↔ | 1.5 s | from 0 to 50% of upper range limit value |
| °C Pt100 | max. 3 s | |
| >10 Hz | 1.5 s | |

* Without parallel connected capacitance

Display

LCD panel (65 mm x 30 mm) with display of up to 3 measured values, unit of measure, type of current and various special functions.

Display / char. height 7-segment characters
Main display: 12 mm
Auxiliary displays: 7 mm
4 3/4 places, ≥ 30999 steps
“OL” appears
“-” sign is displayed if plus pole is connected to ⊥

LCD Test All display segments available during operation of the METRA HIT 27 are activated after the instrument is switched on.

Background illumination

METRA HIT 27I only

Power Supply

Storage batteries 3 ea. 1.2 V/2100 mAh NiMH (AA size)
Service life with 2100 mAh NiMH storage battery set

| Measuring Function | Current [mA] / 3.6 V | Operating Hours [h] |
|-----------------------|----------------------|---------------------|
| V, Hz, Ω, ↔, °C | 70 | 30 |
| mΩ @ 1A | 700 | 3 |
| mΩ @ 200mA | 260 | 8 |
| mΩ @ 20mA | 85 | 24 |
| MΩ @ ... V / 1 MΩ | 100 | 21 |
| Standby (MEM + clock) | 0.15 | approx. 1 year |

Additional consumption for:

Interface operation: 0.5 mA
LCD illumination: 25 mA at 3.6 V. If voltage drops below 2.7 V, the instrument is switched off automatically.

Storage battery test ↔ is displayed automatically if storage battery voltage drops to below approx. 3.3 V

Storage battery charging with NA HIT 2x (Z218H) mains power battery charger (2100 mAh storage battery set: recharging time 20 hours)
or
with external NiMH quick charger Z206D:

1.800.561.8187

www.itm.com

information@itm.com

METRAHIT | 27M, 27I and H+E CAR

Milliohm Resistance Meter and Digital Multimeter, Insulation Tester and Data Logger

Fuses

Fuse links for all mΩ measuring ranges FF (UR) 1.6 A/1000 V AC/DC, 6.3 mm x 32 mm, 10 kA switching capacity at 1000 V AC /DC and ohmic load

Acoustic Signal For display > 610 V in 600 V range (intermittent tone, 250 ms on/off)

Electrical Safety

Safety class II per IEC/EN 61010-1:2001 /VDE 0411-1:2002

Measurement category II

Operating voltage 600 V

Fouling factor 2

Test voltage 3.5 kV~ per IEC/EN 61010-1:2001/ VDE 0411-1:2002

Electromagnetic Compatibility (EMC)

Interference emission EN 61326-1:2006 class B

Interference immunity EN 61326-1:2006
EN 61326-2-1:2006

Data Interface

With BD232 interface adapter as accessory:

Data transmission Optical via infrared light through the housing

Type RS 232 C, serial, per DIN 19241

Bidirectional baud rate (read and write)
SI232-II: all baud rates
BD232: 9600 baud

Ambient Conditions

Accuracy range 0 °C ... +40 °C

Operating temp. -10 °C ... +50 °C

Storage temperature -25 °C ... +70 °C (w/o storage batteries)

Relative humidity 40% ... 60%,
no condensation allowed

Elevation to 2000 m

Deployment Indoors only, except within specified ambient conditions

Mechanical Design

Protection Housing: IP 54, connector jacks: IP 20

Extract from table on the meaning of IP codes

| IP XY (1 st digit X) | Protection against foreign object entry | IP XY (2 nd digit Y) | Protection against the penetration of water |
|------------------------------------|--|------------------------------------|--|
| 0 | not protected | 0 | not protected |
| 2 | ≥ 12.5 mm dia. | 2 | vertically falling drops with enclosure tilted 15° |
| 4 | ≥ 1.0 mm dia. | 4 | splashing water |
| 5 | dust protected | 5 | water jets |

Dimensions 84 mm x 195 mm x 35 mm

Weight approx. 420 gr. with storage batteries
(without GH18 protective rubber cover)

Standard Equipment

METRA HIT 27M (M227A) including

- 1 GH18 protective rubber cover with carrying strap
- 3 size AA NiMH storage batteries
- 1 KS17-S measurement cable set
- 1 abbreviated operating instructions
- 1 operating instructions D/GB/F
- 1 DAkkS calibration certificate

METRA HIT 27I (M227B) including

- 1 GH18 protective rubber cover with carrying strap
- 3 size AA NiMH storage batteries
- 1 NA HIT 27 mains power battery charger
- 1 KS17-S measurement cable set
- 1 set of Kelvin clips KC4 (1 set = 2 each)
- 1 abbreviated operating instructions
- 1 operating instructions D/GB/F
- 1 DAkkS calibration certificate

METRA HIT 27AS (M227C) avionics set consisting of

- 1 METRA HIT 27I
- 1 GH18 protective rubber cover with carrying strap
- 3 size AA NiMH storage batteries
- 1 NA HIT 27 mains power battery charger
- 1 KS17-S measurement cable set
- 1 set of Kelvin clips KC4 (1 set = 2 each)
- 1 set of Kelvin probes KC27 (1 set = 2 each)
- 1 HC30 hard case
- 1 abbreviated operating instructions
- 1 operating instructions D/GB/F
- 1 adapter USB-HIT including USB cable and system software METRAWin®10/METRA HIT on CD-ROM
- 1 DAkkS calibration certificate



METRAHIT | 27M, 27I and H+E CAR

Milliohm Resistance Meter and Digital Multimeter, Insulation Tester and Data Logger

METRA HIT 27I Set Set (M227S) consisting of

- 1 **METRA HIT 27I**
- 1 protective rubber cover green
- 3 size AA NiMH storage batteries
- 1 NA HIT 27 mains power battery charger
- 1 KS17-2 measurement cable set
- 1 set of Kelvin clips KC4 (1 set = 2 each)
- 1 HC30 hard case
- 1 abbreviated operating instructions
- 1 operating instructions D/GB/F
- 1 DAkKS calibration certificate

METRA HIT H+E CAR (M227T) including

- 1 protective rubber cover orange
- 3 size AA NiMH storage batteries
- 1 NA HIT 27 mains power battery charger
- 1 abbreviated operating instructions
- 1 operating instructions D/GB/F
- 1 DAkKS calibration certificate

METRA HIT H+E CAR Set (M227U) consisting of

- 1 **METRA HIT H+E CAR**
- 1 orange protective rubber cover
- 3 size AA NiMH storage batteries
- 1 NA HIT 27 mains power battery charger
- 1 abbreviated operating instructions
- 1 operating instructions in German/English/French
- 1 DAkKS calibration certificate
- 1 orange hybrid test case kit with
 - 1 pair of fused test probes
 - 1 pair of lantern fronted probes
 - 1 pair of measuring cables (2 meters long)
 - 1 pair of Kelvin measuring cables with crocodile clips

Accessories

Hybrid Diagnostic-Kit (Z227U) consisting of

- 1 orange hard case
- 1 pair of fused test probes red/black 1000 V CAT III
- 1 pair of lantern fronted probes red/black 1000 V CAT II/CAT III
- 1 pair of measuring cables red/black 1000 V CAT III
- 1 pair of Kelvin measuring cables with crocodile clips
- inserts for additional accessories



ADK Automotive Diagnostic Kit (Z227T) consisting of

- 1 hard case in black, large set of flexible adapter cables (heat resistant silicon cables with 4 mm safety right angle plug on one side and individual automotive flat and round connectors, male or female type, on the other side, 35 cm long)
- 1 Cord Pro cable extension on cable reel, black, 6 meters long
- 1 pair of needle-shaped test probes, angled, red/black
- 1 pair of test probes, red/black
- 2 pair of T-Sockets, red/black
- 4 miniature slim test probes (Back Probing Probes Mini)
- 1 pair of measuring cables 1.2 meters, red/black
- 1 long reach cable piercer, red/black
- 1 standard cable piercer, red/black
- 1 pair of crocodile clips, red/black



METRAHIT | 27M, 27I and H+E CAR Milliohm Resistance Meter and Digital Multimeter, Insulation Tester and Data Logger

Accessories

(See also table "Order Information" below)

The following accessories, some of which are included as standard equipment, are recommended for use with the METRA HIT 27 or METRA HIT H+E CAR respectively:

Mains power battery charger with broad range input

NA HIT 2x (Z218H): AC 90 ... 250 V DC 5 V
600 V CAT IV, 1000 V CAT III

NA HIT 27 (Z218I): AC 90 ... 250 V DC 5 V
600 V CAT II



NiMH quick charger Z206D

Microprocessor-controlled quick charging unit for 1 to 4 NiMH or NiCd storage batteries, AA or AAA type (micro and/or mignon) with a 100 ... 240 V AC power supply unit and 10 ... 15 V DC motor vehicle charging cable.

Milliohm Measurement with Type KC4 Kelvin Clips

Kelvin clips are suitable for establishing contact between the METRA HIT 27 and low-resistance devices under test. They compensate for influence resulting from cable and contact resistance. The KC4 set includes two clips with insulated, twist-resistant jaws and good clamping action. They can be used for establishing contact with very fine wires, up to rails and rods with a maximum diameter of 15 mm. 4-pole connection is highly advisable for the measurement of values of less than 30 Ω .



Milliohm Measurement with Type KC27 Kelvin Probe

Same usage as KC4, but with two 2 spring loaded steel tips for piercing insulation coatings (e.g. on the outer skin of aircraft) and oxide layers (e.g. at oxidized battery contacts), in order to assure good contact for milliohm measurements, as well as for current and voltage measurements.



Temperature Measurement with Z3409 / Current Measurement with CP330

The Z3409 is just one of many temperature sensors which can be selected from a wide ranging product spectrum. For further information regarding temperature and current sensors, as well as other accessories,



Z3409

CP330

Ever-Ready Cases and Hard Cases

The following hard-shell cases are available:

HC20 with space for one METRA HIT and accessories.

HC30 with space for 2 METRA HIT instruments, one 2-channel PC recording system with software, adapter, cable and accessories.

F836 imitation leather carrying pouch for one METRA HIT and accessories (dimensions: 175 x 210 x 75 mm)

F840 imitation leather carrying pouch for two METRA HIT instruments, 2 adapters and accessories (dimensions: 305 x 285 x 70 mm)



HC20

HC30



F836



F840 (with sample contents)

1.800.561.8187

www.itm.com

information@itm.com

METRAHIT | 27M, 27I and H+E CAR

Milliohm Resistance Meter and Digital Multimeter, Insulation Tester and Data Logger

Cordura belt pouch HitBag

for multimeters of the METRA HIT and METRAport series



Recording System with BD Pack

This option includes all additionally required hardware and software components for creating a PC supported measuring and recording system together with the METRA HIT 27. A full version of METRAwin®10/METRA HIT is included with this package, which can be run with Windows XP, VISTA or 7 (see figure on page 2).



USB-HIT Interface Adapter

Regarding its functions, this adapter conforms to the BD232 interface adapter, except that the bidirectional transmission takes place between the IR and USB interface.

It is not possible to establish a multi-channel system with this adapter.



| Current Measuring Accessories | | | | | | | | |
|--|--|--|-----------------|----------------|-------------------------------------|------------------------------|---------------------------------|----------------|
| All current sensors and transformers are equipped with a connector cable (1.2 to 1.5 m long) with 4 mm safety banana plugs | | | | | | | | |
| Type | Designation | Measuring Range | Meas. Category | Max. Wire Dia. | Transformation Ratio | Frequency Range | Intrinsic Error ±(% rdg. + ...) | Article Number |
| AC/DC Current Sensors with Voltage Output | | | | | | | | |
| CP30 | DC/AC clip-on current sensor, with battery mode (30 h) | 5 mA ... 30 A (DC / AC pk) | 300 V / CAT III | 25 mm | 100 mV/A | DC...20 kHz (-3 dB) | 1 % + 2 mA | Z201B |
| CP330 | DC/AC clip-on current sensor, with 2 measuring ranges, battery mode (50 h) | 0,5 ... 30 A 5 ... 300 A (DC / AC rms) | 300 V / CAT III | 25 mm | 10 mV/A; 1 mV/A | DC...20 kHz (-3 dB) | 1 % + 50 mA 1 % + 100 mA | Z202B |
| CP1100 | DC/AC clip-on current sensor, with 2 measuring ranges, battery mode (50 h) | 0,5 ... 100 A 5 ... 1000 A (DC / AC rms) | 300 V / CAT III | 32 mm | 10 mV/A; 1 mV/A | DC...20 kHz (-1dB) | 1 % + 100 mA 1 % + 500 mA | Z203B |
| CP1800 | DC/AC current clamp sensor, with 2 measuring ranges, battery mode (50 h) | Range: 0.5 ... 125 A Range: 5 ... 1250 A (DC / AC rms) | 300 V / CAT III | 32 mm | 10 mV/A, 1 mV/A | DC ... 20 kHz (-1 dB) | 1% + 100 mA 1% + 500 mA | Z204A |
| Z13B | Clip-on current sensor with 2 measuring ranges, battery mode (50 h) | 0.2 ... 40 A~/60 A~, 0.5 ... 400 A~/600A~ | 300 V / CAT IV | 50 mm | 10 mV / A, 1 mV / A | DC ... 65 Hz ... 10 kHz | 1.5% + 0.5 A 2.5% | Z13B |
| AC Current Sensors with Voltage Output | | | | | | | | |
| WZ12B | Clip-on current sensor | 10 mA~ ... 100 A~ | 300 V / CAT III | 15 mm | 0.1 mV / mA | 45 ... 65 ... 500 Hz | 1.5% + 0.1 mA | Z219B |
| WZ12C | Clip-on current sensor with 2 measuring ranges | 1 mA~ ... 15 A~, 1 ... 150 A~ | 300 V / CAT III | 15 mm | 1 mV / mA, 1 mV / A | 45 ... 65 ... 400 Hz | 3% + 0.15 mA, 2% + 0.1 A | Z219C |
| WZ11B | Clip-on current sensor with 2 measuring ranges | 0.5 ... 20 A~, 5 ... 200 A~ | 600 V / CAT III | 20 mm | 100 mV / A, 10 mV / A | 30... 48... 65 ... 500 Hz | 1 ... 3% | Z208B |
| Z3512A | Clip-on current sensor with 4 measuring ranges | 1 mA ... 1/10 A~ 100/1000 A~ | 600 V / CAT III | 52 mm | 1 V/A, 100 mV/A, 10 mV/A, 1 mV/A | 10... 48... 65 ... 3 kHz | 0.5 ... 3%, 0.2 ... 1% | Z225A |

METRAHIT | 27M, 27I and H+E CAR

Milliohm Resistance Meter and Digital Multimeter, Insulation Tester and Data Logger

Order Information

| Description | Type | Article Number |
|---|-----------------------------|-----------------|
| Milliohm resistance meter and multimeter with memory ¹ | METRA HIT 27M | M227A |
| Insulation tester, milliohm resistance meter and multimeter with memory ¹ | METRA HIT 27I | M227B |
| Avionics set ¹ | METRA HIT 27AS | M227C |
| Megatester Hybrid & E-CAR Set for measurements on electric and hybrid vehicles ² | METRA HIT 27I SET | M227S |
| Megatester for Hybrid & E-CARs for measurements on electric and hybrid vehicles ² | METRA HIT H+E CAR | M227T |
| Megatester Hybrid & E-CARs Set for measurements on electric and hybrid vehicles ² | METRA HIT H+E CAR SET | M227U |
| Hardware Accessories | | |
| Mains power battery charger AC 90...250 V DC 5 V 600 V CAT IV, 1000 V CAT I II | NA HIT 2x | Z218H |
| Mains power battery charger AC 90 ... 250 V DC 5 V, 600 V CAT II | NA HIT 27 | Z218J |
| NiMH quick charger w/o storage batteries | Z206D | Z206D |
| Fuses for all mΩ measuring ranges | FF (UR) 1.6 A/ 1000 V AC/DC | Z109C |
| Kelvin clips (1 set = 2 each) for 4-pole connection of low-resistance DUTs, cable length: 120 cm | KC4 | Z227A |
| Kelvin probes (1 set=2 each) with double steel tips for 4-pole connection of low resistance DUTs | KC27 | Z227B |
| Cable set with 2 mm diameter steel tips and 120 cm cable, 1000 V CAT II | KS17-S | Z110H |
| Pt100 temperature sensor, -40 ... 600 °C for surface and immersion measurements | Z3409 | GTZ3409000R0001 |
| Pt1000 temperature sensor, -20 ... +220 °C for measurement in household appliances, as well as in gases and liquids, 3.2 mm diameter stainless steel immersion tube | TF220 | Z102A |
| Hybrid Diagnostic-Kit ² | KS-H&E | Z227U |
| ADK Automotive Diagnostic Kit ² | KS-ADK | Z227T |
| Transport Accessories | | |
| Imitation leather carrying pouch for METRA HIT | F829 | GTZ3301000R0003 |
| Cordura belt pouch for multimeters of the METRA HIT series | HitBag | Z115A |
| Magnetic holder and belt strap for METRAHIT Multimeter with Rubber Holster | HIT-Clip | Z117A |
| Imitation leather ever-ready case with cable compartment | F836 | GTZ3302000R0001 |
| Ever-ready case for 2 METRA HITs, 2 adapters and accessories | F840 | GTZ3302001R0001 |
| Hard case for one METRA HIT and accessories | HC20 | Z113A |

| Description | Type | Article Number |
|---|-----------|-----------------|
| Accessories for Operation with PCs | | |
| Single-channel pack consisting of BD232 bidirectional interface adapter, cable, METRAwin®10/ METRA HIT software and installation instructions | BD-Pack 1 | Z215A |
| Bidirectional interface adapter | BD232 | GTZ3242100R0001 |
| RS232 interface cable, 2 m long (included with Z3231) | Z3241 | GTZ3241000R0001 |
| METRAwin®10/METRA HIT software update and installation instructions | Z3240 | GTZ3240000R0001 |
| Bidirectional interface adapter IR/USB for METRA HITs | USB-HIT | Z216A |

¹ standard equipment see page 5

² standard equipment see page 6

METRAHIT | 27M, 27I and H+E CAR

Milliohm Resistance Meter and Digital Multimeter, Insulation Tester and Data Logger

Edited in Germany • Subject to change without notice • A pdf version is available on the Internet.

1.800.561.8187

www.itm.com

information@itm.com