

MOISTURE METERS 2014

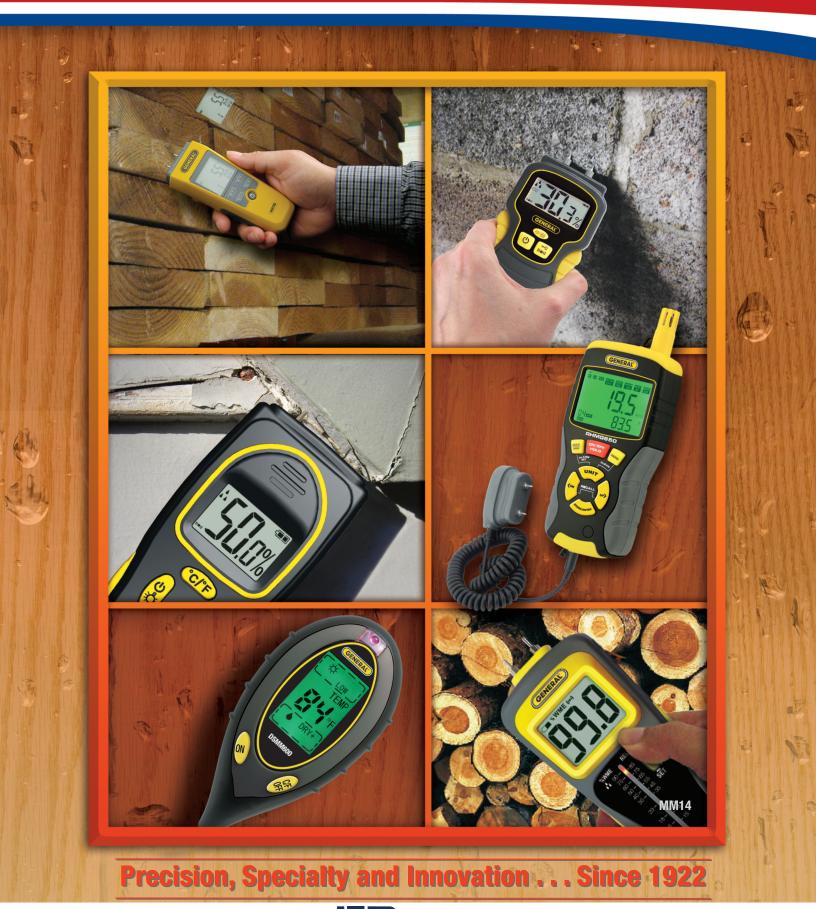


Table of Contents / Featured Products



PROFESSIONAL INSPECTION KITS	3
COMPARISON CHART	4 – 5
PIN & PINLESS METERS	6 – 7
DEEP SENSING METERS	8
PRECISION & MULTI-PARAMETER METERS	9
SOIL & GRAIN	10 – 11

New & Featured Products













Professional Inspection Kits

CONTRACTOR'S KIT - KT100

Ideal for restoration and renovation specialists. Buy all three units and save!

MSV100 - 3-In-1 Stud/Voltage/ **Metal Detector**

FEATURES:

- · Detects wood joists/studs, live wires and pipes/cables behind
- Automatically compensates for wall thickness
- In voltage mode, automatically compensates for distance to wire
- · Center arrow and beeper pinpoint edges
- Marking slot on top of unit
- 1-Year limited warranty

SPECIFICATIONS:

- Wall Thickness for Wood Detection: 3/4 in. (max)
- Voltage Detection Range Behind Wall: 2 in.
- Metal Detection Range Behind Wall: 1.5 in.
- Operating Temperature: 40° to 104°F
- Dimensions: 7.1 x 3.0 x 1.2 in.
- Power Source: 1 "9V" battery (included)
- Battery Life: 1-year normal use



KT100

IRTC50 - Scanning IR Thermometer **FEATURES:**

- One squeeze of trigger captures reference temp and begins
- Color of light panel and speed of beeper indicate whether target is above, within or below reference temperature ± setpoint bandwidth
- · Choice of three setpoint bandwidths: 1°F (default), 5°F and 10°F
- Ideal for making relative readings—as in energy auditing
- Star Burst laser targeting helps determine optimum target distance
- 1-Year limited warranty

SPECIFICATIONS:

- Distance-To-Spot (D:S) Ratio: 8:1
- Measurement Range: -40° to 428°F
- Measurement Accuracy/Resolution: ±4°F above 32°F; ±3°F below 32°F/0.1°
- Emissivity: Fixed at 0.95
- Power Source: 1 "9V" battery (included)

KIT INCLUDES:

- Soft Carrying Case
- 3 Batteries
- 3 User's Manuals



MMD7NP - Pinless Moisture Meter

FEATURES:

- · Separate settings for drywall, masonry, softwood and hardwood
- 2 in. backlit LCD + 3-color LED bar graph
- · Non-invasive technology with 34 in. maximum sensing depth
- ±4% accuracy on wood
- Auto calibrating
- · Reading HOLD button
- Separate out-of-range alarms for wood and building materials
- 1-Year limited warranty

SPECIFICATIONS:

- Measurement Ranges: 0 to 53% for softwood; 0 to 35% for hardwood
- Measurement Accuracy/Resolution: ±4%/1%
- Maximum Sensing Depth: 3/4 in.
- Operating Temperature: 32° to 104°F
- Dimensions: 6.7 x 2.9 x 1.2 in.
- · Weight: 5.4 oz. (152g) without battery
- Power Source: 1 "9V" battery (included)

KT100 016039

PROFESSIONAL INSPECTION KIT - KT280

Ideal for restoration & renovation specialists, HVAC/R installers & technicians, & building inspectors. Buy all three units and save!

DCS280 - Rugged Video Inspection System **FEATURES:**

- Grip and color LCD are IP54 splashproof and 1m drop-proof
- Thin (0.35 in.) probe is IP67 oil, water and dust-proof
- One-handed operation frees your other hand to use tools
- Video flip and 2X zoom buttons Includes four probe tip
- accessories (thread protector, magnetic pickup, pickup hook, 45° mirror)
- 3-Year limited warranty

SPECIFICATIONS:

- Camera/LCD Resolution: 320 x 240 pixels
- Depth of Field: 1 in. to 10 ft. (25mm to 3m)
- Video Controls: 180° flip. 2X zoom in 7 steps
- . Dimensions of Grip and Monitor: 8.5 x 4.6 x 3.2 in.
- Power Source: 4 "AA" batteries (included)

KIT INCLUDES:

- Soft Carrying Case
- 7 Batteries (4 "AA", 2 CR2032, 1 "9V")
- 3 User's Manuals

1.800.561.8187

IRT105 - 6:1 Pocket Infrared Thermometer

- Adjustable emissivity
- Min and Max measurement modes + Measurement Lock mode
- · Selectable °F or °C unit
- Small and light and easy to use

SPECIFICATIONS:

- Distance-To-Spot (D:S) Ratio: 6:1
- Measurement Range: -22° to 482°F
- Measurement Accuracy/Resolution: ±3°F above 32°F; ±5°F below 32°F/0.1°
- Dimensions: 4.25 x 2.05 x 0.98 in.
- Weight: 1.41 oz. (40g)
- Power Source: 2 CR2032 Li-ion batteries (included)
- · 1-Year limited warranty





MMD7NP - Pinless Moisture Meter FEATURES:

- · Separate settings for drywall, masonry, softwood and hardwood
- 2 in. backlit LCD + 3-color LED bar graph
- Non-invasive technology with 34 in. maximum sensing depth
- ±4% accuracy on wood
- Auto calibrating
- Reading HOLD button
- Separate out-of-range alarms for wood and building materials
- 1-Year limited warranty

SPECIFICATIONS:

- Measurement Ranges: 0 to 53% for softwood; 0 to 35% for hardwood
- Measurement Accuracy/Resolution: ±4%/1%
- Maximum Sensing Depth: 3/4 in.
- Operating Temperature: 32° to 104°F
- Dimensions: 6.7 x 2.9 x 1.2 in. • Weight: 5.4 oz. (152g) without battery
- Power Source: 1 "9V" battery (included)

UPC NO. 016046 KT280





MOISTURE METERS

Comparison Chart



Affordable. Versatile. And High-tech.

We're especially excited about our new MMD950, with its "magic" sphere that can sense moisture 4 inches below a hard surface. This instrument and its siblings demonstrate that when it comes to construction materials like wood, concrete and wallboard, General has the right moisture measurement tool for you.



SPECIFICAT	IONS				
Model No.	MM1E	MMD4E	MMD5NP	MM70D	MMD7003
Name	Pin-Type LED Bar Graph Moisture Meter	Pin-Type LCD Moisture Meter	Pinless LCD Moisture Meter	Pin-Type LCD Moisture Meter with Remote Pin-Type Probe	Pin-Type LCD Moisture Meter with Bar Graph
Measurement Depth	Mostly surface	Mostly surface	3/4 in. (20mm)	Mostly surface	Mostly surface
Pin Length	3/8 in. (10mm)	3/8 in. (10mm)	N/A	1/2 in. (13mm) and 7/8 in. (23mm)	0.44 in. (11mm)
Measurement Accuracy	±1% of reading	±3% of reading	±(3% of reading + 3 digits)	±1% of reading	±(5% of reading + 5 digits)
Measurement Resolution	1%	0.1%	0.1%	0.1%	0.1%
Material Selection Switch	No	Yes	Yes	Yes	Yes
Calibration Check	Manual	No	No	Manual	No
Other Features		Data hold, Lo/Med/Hi moisture tones & icons	Data hold, Audible peak reading alert	99 reading memory, 8 wood species selection, Auto Temperature Compensation, Data hold, Min/Max/Avg memory, Manual calibration	Data hold, Min/Max memory
Includes (in addition to user's manual and 1 year limited warranty)	"9V" battery	"9V" battery	"9V" battery	Soft pouch, "9V" battery	10 pairs of extra pins



MOISTURE METERS Comparison Chart



				SPECI	FICATIONS
MMD7NP	MMD8P	RHMG650	MMH800	MMD900	MMD950
Pinless LCD	Precision	10-Parameter	Pin/Pinless	Pin/Pinless Deep	Pin/Pinless Deep
Moisture	Multi-Species	Thermo-	Moisture Meter	Sensing	Sensing Moisture
Meter with	Wood Moisture	Hygrometer with	with	Moisture Meter	Meter
Tricolor Bar	Meter	Pin/Pinless	Temperature &	w/Remote Probe	w/Spherical
Graph		Moisture Meter	Humidity		Sensor
3/4 in. (20mm)	Mostly surface	Mostly surface	Mostly surface for	Mostly surface for	Mostly surface for
			pin-type probe;	remote pin-type	pins and remote
			3/4 in. (20mm) for	probe;	pin-type probe;
			pinless sensor	2 in. (51mm) for	4 in. (102mm) for
				pinless sensor	pinless sensor
N/A	0.2 in. (5mm)	3/8 in. (10mm)	3/16 in. (5mm)	3/8 in. (10mm) and	3/16 in. (5mm)
				3/16 in. (5mm)	
±4% of reading for	±(3% of reading	±3% of reading	±3% of reading	±(3% of reading	±(3% of reading
wood	+ 5 digits)	_		+5 digits)	+5 digits)
1%	0%	0.1%	0.1%	0.1%	0.1%
Yes	N/A	No	Yes	No	No
Automatic	Manual	No	Manual	Manual and Auto	Manual and Auto
Hi/Lo audible	Incorporates	Data hold, Settable	Data hold,	Data hold,	Data hold,
alarms, Hi/Med/Lo	48 moisture-	audible Hi/Lo	Audible/visual	Audible/visual	Audible/visual
color bands	resistance curves,	moisture alarms,	Hi/Med/Lo alarms,	moisture level	moisture level
	super-bright OLED	Thermo-	Also measures	alarm	alarm
	display, 99 reading	Hygrometer for	temperature and		
	memory,	measuring 7	RH for display on		
	temperature	environmental	separate LCD		
	compensation,	parameters			
	also measures				
	temperature and				
	RH				
"9V" battery	Hard case,	Soft pouch,	Hard case, "9V"	Hard case,	Hard case,
	"9V" battery	external probe,	battery, two pairs	external probe,	external probe,
		"9V" battery	of extra pins	"9V" battery, two	"9V" battery, two
				pairs of extra pins	pairs of extra pins





PIN-TYPE LED BAR GRAPH MOISTURE METER - MM1E

Ideal for use in woodworking, building construction and home inspection. Examples include:

- . Checking for moisture in carpets and sub-flooring
- . Checking wood, drywall and concrete before painting/wallpapering, sealing or treating
- Locating water leaks in roofs, floors and walls
- Selecting dry lumber

FEATURES:

- 10-LED display
- Two measurement ranges: 7 to 15% and 16 to 35%
- Protective cap doubles as calibration checker
- Full and low battery indications
- · CE and RoHS approved

SPECIFICATIONS:

- ◆ Low Measurement Range: 7 to 15% WME (Wood Moisture Equivalent)
- ♦ High Measurement Range: 16 to 35% WME
- ♦ Measurement Accuracy: ±1 LED (~1%)
- ♦ Calibration Check Point: 21% ±2%
- ♦ Low Battery Level: <7.5V
- ♦ Current Consumption: <15mA

- ◆ Operating Temperature: 32° to 140°F (0° to 60°C)
- ♦ Dimensions:
 - 6.5 x 2.7 x 1 in. (164 x 69 x 26mm)
- ♦ Weight: 3.2 oz. (91g) w/out battery
- ♦ Power Source: 1 "9V" battery (included)

INCLUDES:

- Protective Cap
- Battery
- User's Manual
- 1-Year Limited Warranty

UPC NO. 10188 9 MM1E



PIN-TYPE LCD MOISTURE METER - MMD4E

Ideal for use in woodworking, building construction, home inspection, lumber selection, water-damage restoration.

FEATURES:

- 99.9 count LCD w/0.4 in. high digits
- · Wood/building materials selection switch
- Low, Medium and High moisture tones and on-screen icons
- Data hold + auto power off + low battery indicator
- Replaceable stainless steel pins (#PIND4E)

SPECIFICATIONS:

- ♦ Overall Moisture Measurement Range: 5 to 50% for wood, 1.5 to 33% for building materials
- ♦ Wood Moisture Scales: 5 to 11.9% (low); 12 to 15.9% (medium); 16 to 50% (high)
- ♦ Building Materials Scales: 1.5 to 16.9% (low); 17 to 19.9% (medium); 20 to 33% (high)

- ♦ Measurement Accuracy: ±3% of reading
- ♦ Measurement Resolution: 0.1%
- ♦ Low Battery Level: <7.5V
- ◆ Auto Power Off Trigger: 3 minutes of inactivity
- ♦ Current Consumption: <15mA
- ◆ Dimensions: 6.0 x 2.6 x 0.8 in. (152 x 66 x 20 mm)
- ♦ Power Source: 1 "9V" battery (included)

INCLUDES:

- Protective Cap Battery User's Manual
- 1-Year Limited Warranty

 UPC
 NO.

 41447 7
 MMD4E

 01499 8
 PIND4E Replacement pins



PINLESS LCD MOISTURE METER - MMD5NP

Ideal for measuring moisture content of wood and other construction materials.

FEATURES:

- Non-invasive measurement technique
- Jumbo display
- Wide measurement range
- Intuitive on-screen icons: Low/Medium/High moisture content; wood/concrete mode
- Data hold
- · Audible peak reading alert
- Auto Power Off
- Low and very low battery warnings

SPECIFICATIONS:

- Measurement Ranges: 0 to 99.9% WME (Wood Moisture Equivalent) for wood; 0 to 56.5% for building materials
- ♦ Measurement Accuracy/Resolution: ±3%/0.1%
- ♦ Measuring Depth: 3/4 in. (20mm)

- ◆ Display Type/Size: 99.9 count LCD with 0.4 in. (10mm) high digits
- ♦ Auto Power Off Trigger: 3 to 4 minutes with 0% reading
- ♦ Low/Very Low Battery Warning Triggers: <7.5V/<6.5V
- ◆ Operating Temperature: 32° to 122°F (0° to 50°C) @ <80%RH
- ♦ Dimensions: 5.75 x 2.6 x 0.75 in.
- (146 x 66 x 19 mm)

 ◆ Power Source: 1 "9V" battery (included)

INCLUDES:

- Battery User's manual
- 1-Year Limited Warranty

UPC NO. 40142 2 MMD5NP



PINLESS LCD MOISTURE METER W/TRICOLOR BAR GRAPH – MMD7NP

Ideal for measuring moisture content of wood and other construction materials. **FEATURES:**

- Separate settings for drywall, masonry, softwood and hardwood
- 2 in. backlit LCD + 3-color LED bar graph
- Non-invasive technology with 3/4 in. maximum sensing depth
- ±4% accuracy on wood
- Auto calibrating
- Data hold
- Separate out-of-range alarms for wood and building materials

SPECIFICATIONS:

- ♦ Measurement Ranges: 0 to 53% for softwood; 0 to 35% for hardwood
- ♦ Measurement Accuracy/Resolution: ±4%/1%
- ♦ Maximum Sensing Depth: 3/4 in.
- ♦ Auto Power Off (APO) Trigger: 2 minutes of inactivity
- ♦ Operating Temperature: 32° to 104°F
- ♦ Dimensions: 6.7 x 2.9 x 1.2 in.
- ♦ Weight: 5.4 oz. (152g) without battery
- ♦ Power Source: 1 "9V" battery (included)

INCLUDES:

- Battery User's Manual
- 1-Year Limited Warranty

UPC	NO.
01583 4	MMD7NP



PRECISION MULTI-SPECIES WOOD MOISTURE METER - MMD8P

Ideal for measuring the moisture content of wood before painting, wallpapering, sealing, treating or joining.

- Readings are species-specific, derived from industry-standard moisture-resistance curves for 48 popular species of wood
- · Joystick makes species selection fast and easy
- Also measures and displays ambient temperature (in °F or °C) and RH
- Measurements can be compensated for ambient temperature, improving precision
- · Super-bright yellow OLED (organic lightemitting diode) dot matrix display
- 99 record memory with manual or automatic (time-based) recording
- . Multiple display options, including analog bar graph
- Measurement hold button
- · Audible moisture alarm
- · Pin cover doubles as calibration checker
- · Replaceable pins

SPECIFICATIONS:

- ♦ Moisture Measurement:
 - O Range: 5.3 to 40%WME (Wood Moisture Equivalent)
- O Accuracy/Resolution: ±(3% of reading + 5 digits)/0.1%
- Ambient Temperature Measurement:
- O Range: 0° to 176°F (-18° to 80°C)
- O Accuracy/Resolution: ±1.8°F (1°C)/ 0.1°
- · RH Measurement:
- O Range: 20 to 95%RH
- O Accuracy/Resolution: ±5% of reading/ 1%
- Temperature Compensation Range/Resolution: 0° to 255°F (-18° to 124°C)/ 5°F
- Display Type: Yellow OLED in 128 x 64 dot matrix format
- Display Size: 1.54 in. (39mm) diagonal
- Pin Length: 0.2 in. (5mm)
- Power Source: (1) "9V" battery (included)





INCLUDES:

- Battery User's Manual
- 1-Year Limited Warranty

UPC	NO.
01638 1	MMD8

PIN-TYPE LCD MOISTURE METER W/BAR GRAPH - MMD7003

Ideal for measuring moisture content of wood, timber and concrete. **FEATURES:**

- Two displays: Red LED bar graph and LCD display with 0.62 in. (51mm) high digits
- Optional remote probe available
- Replaceable 0.44 in. (11mm) long pins
- Min/Max memory + data hold
- · Heavy-duty housing
- · Low battery indicator

SPECIFICATIONS:

- ♦ Two measurement ranges: 0 to 100% for concrete and non-wood materials, 6 to 40% moisture for wood
- ♦ Measurement Accuracy/Resolution: \pm (5% of reading + digits)/0.1%

- 8.4 x 2.7 1.2 in. (216.5 x 68.5 x 29.7mm)
- ♦ Weight: 8.8 oz. (251g)
- ♦ Power Source: 1 "9V" battery (not included)

INCLUDES:

- 10 Pairs of Extra Pins
- Protective Cover
- User's Manual
- 1-Year Limited Warranty

UPC	NO.
07003 1	MMD7003
01255 0	MP7003 External Pin-Type Probe (optional



MMD7003



Deep Sensing Meters







Ideal for contractors, woodworkers and homeowners to find leaks and to measure the moisture content of wood and other construction materials.

FEATURES:

- Two measurement modes: Pin (%WME) and pinless (REL)
- Pinless measuring up to 2 in. deep via sensor on back of meter
- Dual displays: Jumbo LCD and 40-LED bar graph
- Protective cover doubles as calibration checker

SPECIFICATIONS

- ♦ Measurement Range: 6.0 to 87.6% WME (Wood Moisture Equivalent) and 0.1 to 99 REL
- Measurement Accuracy (Pin Mode): ±3% of reading +5 digits
- ♦ Pin Length/Type: 3/16 in. (5mm) stainless steel
- ◆ External Probe Cable Length: 46 in. (1.168m)

- ◆ Pinless Measuring Depth: 2 in. (50.8mm)
- ♦ Dimensions: 9 x 2.75 x 1.625 in. (229 x 70 x 41mm)
- ♦ Weight: 8 oz. (249g)
- ♦ Power Source: 1 "9V" battery (included)

INCLUDES:

- Remote Probe Hard Carrying Case
- Two Pairs of Extra Pins
- Battery User's Manual
- 1-Year Limited Warranty

NO.
MMD900
MP905 Deep Wall Moisture Probe

PIN/PINLESS DEEP SENSING MOISTURE METER WITH SPHERICAL SENSOR AND REMOTE PROBE – MMD950

Ideal for contractors, woodworkers and homeowners to measure the moisture content of wood and other construction materials.

FEATURES

- Two measurement modes: Pin and pinless
- Pin mode uses replaceable pins at end of 46 in. cable; pinless mode uses integral ball sensor with 4 in. measurement depth
- Displays % WME or relative readings simultaneously on two displays: 0 to 99.9 count jumbo LCD, and 40-dot tri-color LED bar graph
- · Low battery warning
- Spare pins storage compartment

SPECIFICATIONS:

- ♦ Measurement Range: 6.0 to 87.6% WME (Wood Moisture Equivalent) and 0.1 to 99 REL
 - Measurement Accuracy (Pin Mode):
 ±3% of reading +5 digits

- ♦ Pin Length/Type: 3/16 in. (5mm) Stainless Steel
- ◆ External Probe Cable Length: 46 in. (1.168m)
- ◆ Pinless Ball Sensor Measurement Depth: 4 in. (10.16cm)
- ♦ Dimensions:
- 9 x 2.75 x 1.625 in. (229 x 70 x 41mm)
- ♦ Weight (w/battery): 8 oz. (249g)
- ♦ Power Source: 1 "9V" battery

INCLUDES:

- Remote Probe Two Pairs of Extra Pins
- Hard Carrying Case Battery
- User's Manual 1-Year Limited Warranty

UPC	NO.
01505 6	MMD950
01655 8	MP905 Deep Wall Moisture Probe

PIN/PINLESS MOISTURE METER W/ TEMPERATURE & HUMIDITY – MMH800

Ideal for locating water leaks and measuring moisture content of drywall, plastered walls, floors and subfloors. Also measures ambient temperature and humidity.

FEATURES:

- Pin-type and non-marring inductive sensors
- Two dedicated displays: Moisture percentage, and ambient temperature plus relative humidity
- High/medium/low audible indication of moisture level
- · Holds moisture level readings
- · Auto diagnostic check
- Auto power off

SPECIFICATIONS:

- ♦ Measurement Ranges: 5 to 50% moisture (wood); 1.5 to 33% moisture (building materials)
- ♦ Moisture Measurement Accuracy: ±3%
- ♦ Moisture Measurement Resolution: 0.1%
- ◆ Temperature Measurement Range/Accuracy: 32° to 140°F (0° to 60°C)/±5.4°F (±3°C)

- ♦ Humidity Measurement Range/Accuracy: 25 to 95%/±5% below 75%RH; ±10% above 75%
- ◆ Auto Power Off: After 3 minutes of inactivity
- ◆ Dimensions: 7.13 x 2.17 x 1.57 in. (181 x 55 x 40mm)
- ♦ Weight: 4.06 oz. (115g)
- ♦ Power Source: 1 "9V" battery (included)

INCLUDES:

- Battery Two Pairs of Extra Pins
- User's Manual
- 1-Year Limited Warranty

UPC	NO.	
	01486 8	MMH800





MMD950



Precision & Multi-Parameter Meters

PIN-TYPE LCD MOISTURE METER W/REMOTE PIN-TYPE PROBE - MM70D

Precision digital instrument for making accurate moisture measurements in wood and timber.

PIN/PINLESS LCD MOISTURE METER KIT W/ REMOTE PIN TYPE PROBE AND ROLLER TYPE SENSOR – MM70D-7022KIT

Precision digital moisture meter for highly accurate readings in wood, timber and many other materials.

FEATURES:

- 1% accuracy
- Backlit dual readout LCD
- Protective cap for safe carrying and operation
- · Hardened gloss treatment on display-window for an abrasion-proof long-term clean lens
- 5.5% to 99.9% measurement range with 0 to 1 VDC output
- Stores/recalls up to 99 readings + Min/Max
- Auto temperature compensation and manual calibration
- Choose from 8 wood species groups
- 99 reading memory
- · Interchangeable extension probes
- · CE and RoHS approved

SPECIFICATIONS:

- ♦ Measurement Range: 5.5 to 99.9% Wood Moisture Equivalent (WME)
- ♦ Resolution: 0.1%
- ♦ Measurement Accuracy: ±1% WME
- ♦ Sampling Rate: 0.3 seconds
- ◆ Signal Output: 0 to 1 VDC (10mV/%WME)
- ♦ Power Source: 1 "9V" battery (included)

INCLUDES:

- MM70D Meter with Two 0.5 in. (12.7mm) Pins
- MP7021 External Pin-Type Probe: 39 in. (1m) Long with 0.5 in. (12.7mm) Pins
- Extra Pair of 0.9 in. (23mm) Long Pins
- Soft Pouch Battery
- User's manual
- 1-Year Limited Warranty

KIT INCLUDES: 1 EACH

- MM70D Meter with Two 0.5 in. (12.7mm) Long Pin-Type Probes
- MP7021 External Pin-Type Probe: 39 in. (1m) Long with 0.5 in. (12.7mm) Pins
- MP7022 External Roller-Type Probe
- Extra Pair of 0.9 in. (23mm) Long Pins
- · Hard Carrying Case
- Battery
- User's Manual
- 1-Year Limited Warranty





MM70D





MM70D-7022KIT



10-PARAMETER - RHMG650 13-PARAMETER - RHMG700DL (DATA LOGGING)

Ideal for water damage restoration contractors, facilities maintenance professionals and HVAC system installers/technicians.

FEATURES

- Measures: 1. RH; 2. absolute humidity (in mg/L or g/m³); 3. GPP (mixing ratio—in grains per pound or g/kg); 4. ambient temperature; 5. dew point; 6. atmospheric pressure; 7. vapor pressure; 8. relative moisture level using pinless sensor; 9. absolute moisture level using included pin-type probe; 10. wet bulb temperature (RHMG700DL only); 11. surface temperature (requires optional "K" type thermocouple probe); 12. condensation temperature (requires optional "K" type thermocouple probe
- Logs up to 8000 data points internally, for later download and display as Excel-formatted graph or table on Windows PC using included software, driver and USB cable (RHMG700DL only)
- · Stores/recalls 20 pairs of readings
- · Settable high and low alarms for RH and moisture levels
- · Backlit LCD with 3-digit primary readout + 4-digit secondary readout
- . Min/Max, Data Hold, and Auto Power Off

SPECIFICATIONS

- ♦ Ambient Temperature Range/Accuracy: -20° to 167°F (-29° to 75°C)/±3.6°F (2°C)
- ♦ RH Measurement Range: 0 to 100%
- ♦ RH Measurement Accuracy: ± 2.5% from 11 to 90%; ± 3% below 11% and above 90%
- ♦ Absolute Humidity Range: 0-999 GPP (0 to 160g/kg)
- ◆ Atmospheric Pressure Range: 30 to 120 kPA
- ♦ Vapor Pressure Range: 0 to 20.0 kPA
- ♦ Surface Temperature Range (RHMG700DL only): 15° to 120°F (-10°C to 50°C)

INCLUDES:

- Meter Pin-type Moisture Probe USB Cable and PC Interface Program and Driver (RHMG700DL only) • Sensor Protection Cap • "9V" Battery • Soft Pouch • User's Manual
- 1-Year Limited Warranty

UPC	NO.
01608 4	RHMG650
01620 6	RHMG700DL









DSMM500



PRECISION DIGITAL SOIL MOISTURE METER WITH PROBE - DSMM500

Ideal for commercial, agricultural and professional use.

- · Designed to measure moisture content of soil
- Heavy-duty probe
- Min/Max memory + data hold
- IP65 water resistance
- CE and RoHS approved

SPECIFICATIONS:

- ♦ Measurement Range: 0 to 50%
- ♦ Measurement Accuracy/Resolution: \pm (5% of reading + 5 digits)/0.1%

- ♦ Sampling Time: 0.8 seconds
- ♦ Probe Length: 8 in. (203mm)
- ◆ Display Size: 1.1 x 0.75 in. (28 x 19mm)
- ♦ Operating Temperature: 32° to 122°F (0° to 50°C)@<80% RH
- ♦ Dimensions of Meter Body: 6.8 x 1.6 x 1.6 in. (172 x 40 x 40mm)
- ♦ Weight of Unit (including batteries): 9.4 oz. (267g)
- ♦ Power Source: 4 "AAA" batteries (not included)

UPC	NO.
01240 6	DSMM500

GENERAL-PURPOSE MOISTURE METER – MM6012

Ideal for measuring moisture content of a wide variety of materials, including wood fiber, wood products, tobacco, cotton and paper.

- Large 4-digit LCD display
- · Data hold function
- · Compact, lightweight and easy to use
- Also measures ambient temperature



SPECIFICATIONS:

- ♦ Moisture Measurement Range: 0 to 50%
- ♦ Moisture Measurement Accuracy: ±0.5% of reading
- ◆ Temperature Measurement Range: 14° to 150°F (-10° to 65°C)
- ◆ Temperature Measurement Accuracy: ±1°F (0.8°C)
- ◆ Display Digit Height: 0.4 in. (10mm)
- ♦ Cord Length: 3.5 ft. (1.07m)
- ♦ Probe Length: 6 in. (152mm)
- ♦ Operating Temperature: 32° to 122°F (0° to 50°C)@<85% RH
- ♦ Dimensions:
- 7 x 2.7 x 1.5 in. (178 x 68 x 39mm)
- ♦ Weight (without batteries or probe): 6.7 oz. (190g)
- ◆ Power Source: 4 "AA" batteries (not included)

INCLUDES:

- Hard case User's manual
- 1-Year Limited Warranty

UPC	NO.
10195	7 MM601



GRAIN MOISTURE METER – MMG608

Ideal for use in grain storage and other industrial settings.

FEATURES:

- · Also measures temperature
- Large 4-digit LCD
- Red LED bar graph augments LCD
- Min/Max memory + data hold
- · Rugged construction
- Lightweight

SPECIFICATIONS:

- ♦ Moisture Measurement Range: 8 to 20%
- ♦ Moisture Measurement Accuracy: ±1% of reading
- ◆ Temperature Measurement Range: 14° to 131°F (-10° to 55°C)
- ◆ Temperature Measurement Accuracy: ±1°F (0.8°C)
- ◆ Display Digit Height: 0.4 in. (10mm)

- ◆ Cord Length: 4 ft. (1.22m)
- ♦ Probe Length: 9.8 in. (290mm)
- ♦ Operating Temperature: 32° to 122°F (0° to 50°C)@<85% RH
- Dimensions:
- 7 x 2.7 x 1.5 in. (178 x 68 x 39mm)
- ♦ Weight (without batteries or probe): 9 oz. (280g)
- ◆ Power Source: 4 "AA" batteries (not included)

INCLUDES:

- Protective Hard Case
- · Steel Probe with Dual 9.8 in. Needles and 4 ft. Cord
- · Operating Instructions
- 1-Year Limited Warranty

UPC NO. MMG608



MMG608





4-in-1 SOIL CONDITION METER - DSMM600

Ideal for measuring the temperature, pH and moisture content of soil and the intensity of sunlight it receives.

FEATURES:

- . Measures soil pH, temperature and moisture
- Gauges moisture content within 5 levels and sunlight intensity within 9 levels
- · Large backlit LCD
- C/F switch

SPECIFICATIONS:

- ♦ pH Measurement Range: 3.5 to 9.0
- ♦ pH Accuracy and Resolution: ±0.5 units
- ♦ Temperature Measurement Range: 16° to 122°F (-9° to 50°C)
- **◆ Temperature Accuracy/Resolution:** ±1.8°F (1°C)/1° (F or C)
- ♦ Moisture Ranges:

<5% (Dry+), 5 to 10% (Dry), 10 to 20% (Normal),

20 to 30% (Wet), >30% (Wet+)

♦ Light Level Ranges:

<500 Lux (Low-), 500 to 5000 Lux (Low), 5000 to 10,000 Lux (Low+), 10,000 to 25,000 Lux (Normal-), 25,000 to 60,000 Lux (Normal), 60,000 to 80,000 Lux (Normal+), 80,000 to 100,000 Lux (High-), 100,000 to 120,000 Lux (High), >120,000 Lux (High+)

- ◆ Dimensions of Meter Body: 4.8 x 2.5 x 1.4 in. (122 x 63 x 36mm)
- ♦ Dimensions of Probe (Length x Diameter): 7.9 x 0.24 in. (200 x 6mm)
- ♦ Weight (without battery): 2.9 oz. (81g)
- ♦ Power Source: 1 "9V" battery (not included)

INCLUDES:

- User's Manual
- 1 Year Limited Warranty

DSMM600









