

# Data Sheet

# Plug and Test™ Force Sensors Series R04

32-1133



**Plug & Test™  
Technology**



Unique Plug & Test™ technology allows for interchangeable sensors to be used with a Mark-10 model 5i or 3i indicator. All calibration and configuration data is saved in the smart connector.



The Plug & Test™ connector locks into the receptacle in the indicator when fully inserted. Dual buttons on the indicator housing release the connector for easy removal. Gold plated spring contacts ensure long lasting and reliable connection.




Force is applied to these surfaces. Threaded holes are supplied on both sides to accommodate various mounting configurations and attachments.

Series R04 smart sensors are designed for tension and compression measurement applications with tight space constraints. These extremely compact force sensors feature threaded holes on two sides, which can accept a variety of hooks and implements. Capacities available from 0.25 to 100 lbF [1 to 500 N]. Compatible with Mark-10 model 5i and 3i indicators (sold separately) through unique Plug & Test™ technology.

## Specifications

|                |                                 |
|----------------|---------------------------------|
| Accuracy:      | ±0.2% of full scale + indicator |
| Safe Overload: | 200% of full scale              |
| Weight:        | 0.015 lb [0.007 kg]             |

## Dimensions in [mm]

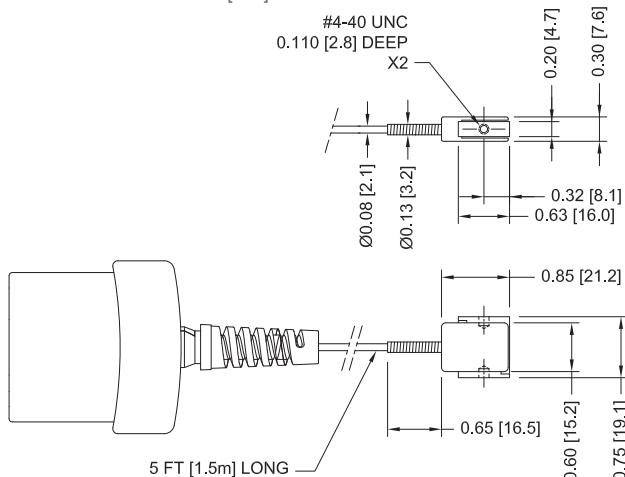

## Capacity x Resolution

| Model No. | Capacity x Resolution - with Model 5i Indicator |           |            |             |             |            | Capacity x Resolution - with Model 3i Indicator |           |             |             |
|-----------|-------------------------------------------------|-----------|------------|-------------|-------------|------------|-------------------------------------------------|-----------|-------------|-------------|
|           | lbF                                             | ozF       | gF         | kgF         | N           | mN         | lbF                                             | gF        | kgF         | N           |
| MR04-025  | 0.25 x 0.0001                                   | 4 x 0.002 | 100 x 0.05 | -           | 1 x 0.0005  | 1000 x 0.5 | 0.25 x 0.0002                                   | 100 x 0.1 | -           | 1 x 0.001   |
| MR04-05   | 0.5 x 0.0002                                    | 8 x 0.005 | 250 x 0.1  | -           | 2.5 x 0.001 | 2500 x 1   | 0.5 x 0.0005                                    | 250 x 0.2 | -           | 2.5 x 0.002 |
| MR04-2    | 2 x 0.001                                       | 32 x 0.02 | 1000 x 0.5 | 1 x 0.0005  | 10 x 0.005  | -          | 2 x 0.002                                       | -         | 1 x 0.001   | 10 x 0.01   |
| MR04-5    | 5 x 0.002                                       | 80 x 0.05 | 1000 x 0.5 | 2.5 x 0.001 | 25 x 0.01   | -          | 5 x 0.005                                       | -         | 2.5 x 0.002 | 25 x 0.02   |
| MR04-10   | 10 x 0.005                                      | 160 x 0.1 | 5000 x 2   | 5 x 0.002   | 50 x 0.02   | -          | 10 x 0.01                                       | -         | 5 x 0.005   | 50 x 0.05   |
| MR04-20   | 20 x 0.01                                       | 320 x 0.2 | 10000 x 5  | 10 x 0.005  | 100 x 0.05  | -          | 20 x 0.02                                       | -         | 10 x 0.01   | 100 x 0.1   |
| MR04-50   | 50 x 0.02                                       | 800 x 0.5 | 25000 x 10 | 25 x 0.01   | 250 x 0.1   | -          | 50 x 0.05                                       | -         | 25 x 0.02   | 250 x 0.2   |
| MR04-100  | 100 x 0.05                                      | 1600 x 1  | 50000 x 20 | 50 x 0.02   | 500 x 0.2   | -          | 100 x 0.1                                       | -         | 50 x 0.05   | 500 x 0.5   |



Mark-10 Corporation ■ [www.mark-10.com](http://www.mark-10.com) ■ [info@mark-10.com](mailto:info@mark-10.com)  
Toll-free: 888-MARK-TEN ■ Tel: 631-842-9200 ■ Fax: 631-842-9201

