
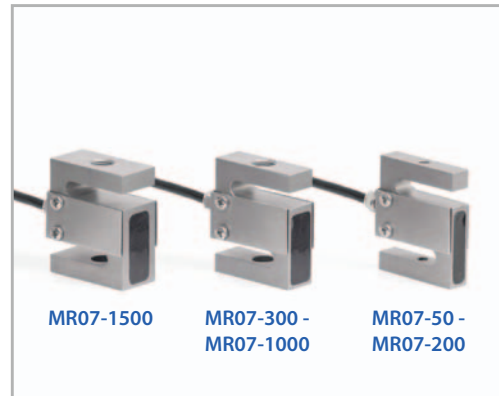


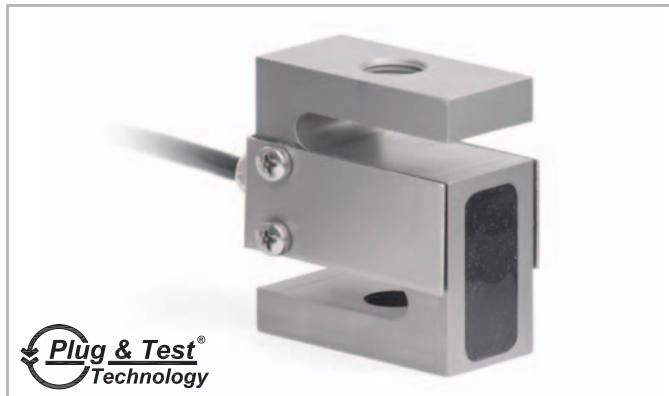

Series R07 force sensors measure tension and compression force, and are designed for use with Models F755, F755S, F1505, and F1505S test frames. Capacities available from 50 to 1,500 lbf [250 N to 7.5 kN]. Also compatible with Mark-10 indicators (sold separately) through unique Plug & Test® technology. Includes a certificate of calibration with data.

## Specifications

|                |                                                |
|----------------|------------------------------------------------|
| Accuracy:      | ±0.15% of full scale + indicator or test frame |
| Safe Overload: | 150% of full scale                             |
| Weight:        | From 1.9 lb [0.9 kg], depending on model       |

## Features



< Series R07 sensor is shown mounted to the crosshead of an F1505 test frame.



< Included certificate of calibration contains 10 data points in each measuring direction.




< Unique Plug & Test® technology allows for interchangeable sensors to be used with any Mark-10 indicator. All calibration and configuration data is saved in the smart connector. Series R07 may be calibrated on a Series F test frame or with a Model M51 or M71 indicator.



< The Plug & Test® connector locks into the receptacle in the indicator when fully inserted. Dual buttons on the indicator housing release the connector for easy removal. Gold plated spring contacts ensure long lasting and reliable connection.

## Dimensions in [mm]

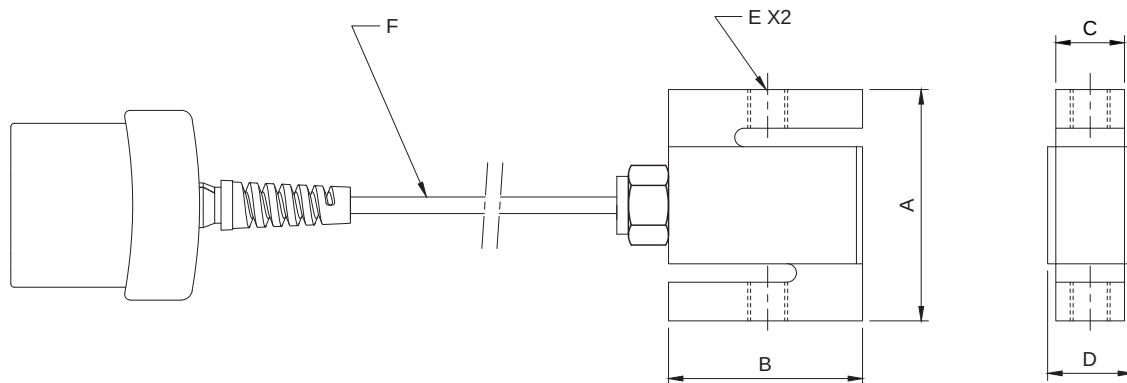

| Model No. | A              | B              | C              | D              | E             | F                 |
|-----------|----------------|----------------|----------------|----------------|---------------|-------------------|
| MR07-50   | 2.40<br>[61.0] | 2.00<br>[50.8] | 0.46<br>[11.7] | 0.90<br>[22.9] | 1/4-28<br>UNF | 10 in<br>[254 mm] |
| MR07-100  |                |                |                |                |               |                   |
| MR07-200  |                |                |                |                |               |                   |
| MR07-300  |                |                | 0.71<br>[18.0] | 1.10<br>[27.9] | 1/2-20<br>UNF |                   |
| MR07-500  |                |                |                |                |               |                   |
| MR07-750  |                |                |                |                |               |                   |
| MR07-1000 |                |                |                |                |               |                   |
| MR07-1500 |                |                | 0.96<br>[24.4] | 1.40<br>[35.6] |               |                   |

## Optional Items



### AC1084

#### Plug & Test® Extension cable

24 in. / 610 mm extension facilitates easier connection to a Model M5I or M7I indicator for calibration.

## Capacity x Resolution

| Model No. | lbF        | ozF        | gF         | kgF        | N          | kN           |
|-----------|------------|------------|------------|------------|------------|--------------|
| MR07-50   | 50 x 0.02  | 800 x 0.5  | 25000 x 10 | 25 x 0.01  | 250 x 0.1  | -            |
| MR07-100  | 100 x 0.05 | 1600 x 1   | 50000 x 20 | 50 x 0.02  | 500 x 0.2  | -            |
| MR07-200  | 200 x 0.1  | 3200 x 2   | -          | 100 x 0.05 | 1000 x 0.5 | 1 x 0.0005   |
| MR07-300  | 300 x 0.2  | 4800 x 5   | -          | 150 x 0.1  | 1500 x 1   | 1.5 x 0.001  |
| MR07-500  | 500 x 0.2  | 8000 x 5   | -          | 250 x 0.1  | 2500 x 1   | 2.5 x 0.001  |
| MR07-750  | 750 x 0.5  | 12000 x 10 | -          | 375 x 0.2  | 3750 x 2   | 3.75 x 0.002 |
| MR07-1000 | 1000 x 0.5 | 16000 x 10 | -          | 500 x 0.2  | 5000 x 2   | 5 x 0.002    |
| MR07-1500 | 1500 x 1   | 24000 x 20 | -          | 750 x 0.5  | 7500 x 5   | 7.5 x 0.005  |