

POPPET CHECK VALVE
1/8" - 1/2" Dual Ferrule Tube,
Female & Male NPT, 1/4" Face Seal
0-3000 PSIG

Description

Poppet type, zero leak, inline check valve for liquid and gas applications to 3000 Psig. Fully retained O-ring seal design permits full rated pressure in the checked direction. Offered with fully interchangeable dual ferrule tube or metal to metal face seal connections. A variety of crack pressures and seal materials, combined with a metal to metal positive stop provides long trouble free service life in the most demanding applications.

Features

- Working Pressures to 3000 Psig (206 bar)
- Full Pressure Rating in Check Direction
- Fully Retained O-ring Seal
- Dual Ferrule Tube, Female NPT, Male NPT and Face Seal Connections Available
- Cracking Pressures from 0.3 to 25 Psig (0.02-1.7 bar)
- 100% Factory tested for crack, leakage and reseal performance

Technical Data

- Nominal Crack Pressures: 0.3, 1, 10, & 25 Psig (0.02, 0.07, 0.7, & 1.7 bar)
- Maximum Pressure: 3000 Psig @ 70°F (206 bar @ 21°C)
- Temperature Rating:
-80°F to 375°F (-62°C to 190°C)
(based on seal selection, see ordering information)


Materials of Construction

Component	Valve Body Material	
	Brass	Stainless Steel
Inlet Cap, Outlet Body, Poppet	Brass, ASTM B16	316 SS, ASTM A479
O-ring Retainer	316 SS, ASTM A479	
Spring	302 SS, ASTM A313	
O'Ring Seal	Buna-N	Viton™

- Lubricated with Krytox™



SERIES PCV POPPET CHECK VALVE

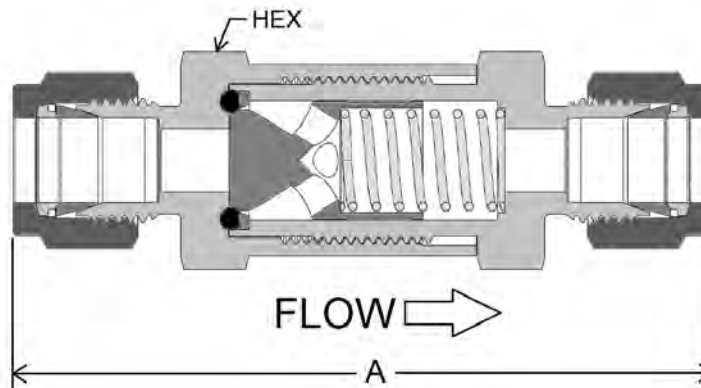

Dimensional/Flow Data

Model Code	Port Configuration		Dimensions/Flow		
	Inlet	Outlet	A ¹ (inches)	Hex	Cv
PCV-2T	1/8" Tube	1/8" Tube	2.19	5/8"	0.10
PCV-2P	1/8" Male NPT	1/8" Male NPT	1.71		
PCV-2F	1/8" Female NPT	1/8" Female NPT	1.89		
PCV-4VS ²	1/4" Face Seal	1/4" Face Seal	2.21		0.47
PCV-4T	1/4" Tube	1/4" Tube	2.35		
PCV-4P	1/4" Male NPT	1/4" Male NPT	2.09		
PCV-4PT	1/4" Male NPT	1/4" Tube	2.22		
PCV-4F	1/4" Female NPT	1/4" Female NPT	2.15		
PCV-6T	3/8" Tube	3/8" Tube	3.17	7/8"	1.47
PCV-6P	3/8" Male NPT	3/8" Male NPT	2.78		
PCV-6F	3/8" Female NPT	3/8" Female NPT	2.98		
PCV-8T	1/2" Tube	1/2" Tube	3.42		1.68
PCV-8P	1/2" Male NPT	1/2" Male NPT	3.16		
PCV-8F	1/2" Female NPT	1/2" Female NPT	3.58		
				1-1/16"	

¹ Dimensions are shown with nuts finger-tight.

² 316 SS only

Flow tested in accordance with ISA S75.21 with air. Restrictions in the inlet or outlet piping may reduce flow.

Other Inlet and Outlet combinations available. Consult Factory.

Ordering Information

PCV - 4T SS - V - 1

SERIES

PCV - Poppet Check Valve

PORT CONFIGURATION

2T - 1/8" Tube x 1/8" Tube
 2P - 1/8" Male NPT x 1/8" Male NPT
 2F - 1/8" Female NPT x 1/8" Female NPT
 4VS - 1/4" Face Seal x 1/4" Face Seal
 4T - 1/4" Tube x 1/4" Tube
 4P - 1/4" Male NPT x 1/4" Male NPT
 4PT - 1/4" Male NPT x 1/4" Tube
 4F - 1/4" Female NPT x 1/4" Female NPT
 6T - 3/8" Tube x 3/8" Tube
 6P - 3/8" Male NPT x 3/8" Male NPT
 6F - 3/8" Female NPT x 3/8" Female NPT
 8T - 1/2" Tube x 1/2" Tube
 8P - 1/2" Male NPT x 1/2" Male NPT
 8F - 1/2" Female NPT x 1/2" Female NPT

MATERIAL CODE

B - Brass
 SS - 316 SS

CRACK PRESSURE

.3 - (.1 - .4 Psig) (0.02 bar)
 1 - (.5 - 1 Psig) (0.07 bar)
 10 - (8 - 12 Psig) (0.7 bar)
 25 - (22 - 27 Psig) (1.7 bar)

SEAL MATERIAL

V - Viton™, -10°F to 375°F (-23°C to 190°C)
 B - Buna-N, -40°F to 250°F (-40°C to 121°C)
 N - Neoprene, -40°F to 300°F (-40°C to 148°C)
 EP - Ethylene Propylene, -65°F to 300°F (-54°C to 148°C)
 FS - Fluorosilicone, -80°F to 350°F (-62°C to 176°C)
 S - Silicone, -70°F to 450°F (-56°C to 232°C)
 T - PTFE, -50°F to 350°F (-46°C to 176°C)
 PTFE Seal may require back pressure to seal leak tight.

OPTIONS

Oxygen cleaning, alternative seals and other thread configurations, consult factory

Note: Viton™ and Krytox™ are trademarks of DuPont.

PROPER COMPONENT SELECTION – When specifying a component, the total system design must be considered to ensure safe and trouble-free performance. Intended component function, materials compatibility, pressure ratings, installation, environment and maintenance are the responsibility of the system designer.

GENERANT