

PDA2360 Series

Plastic Control Stations



FEATURES

- Complete Pre-Assembled Stations
- Fitted with 1 to 4 Normally Open (NO) Spring Return Plastic Bezel Pushbuttons
- Trigger Action Turn to Release Pushbutton (PDA2360-E only)
- IP65 / NEMA 4, 4X and 13 Rated
- Button Text for: Start, Stop, Pause, Batch, Acknowledge, Tare, Silence, or Emergency Stop Functions or Blank
- Four-Position Control Station for Remote Operation of ProVu and Helios Buttons
- Wall Mountable

OVERVIEW

The PDA2360 series of plastic control stations provide a convenient way to remotely control devices such as Precision Digital's digital meters and controllers. For instance, there is a four-position control station that mimics the ProVu and Helios's four buttons: Menu, Right Arrow, Up Arrow, and Enter. There are other control stations that can be used to reset the total, acknowledge relays, set a tare, and run a batch process. There are even control stations with no text on the buttons that can be used for any purpose the user requires. An emergency stop control station is also available.

The control stations come pre-assembled with 1 to 4 Normally Open (NO) red, green, yellow, or black pushbuttons. Knockouts on the top and bottom of the enclosure are provided for convenient wiring and two mounting holes on the back of the enclosure make it easy for wall mounting.

**PRECISION
DIGITAL** 

PRECISION DIGITAL CORPORATION

1.800.561.8187

www.**itm**.com

information@itm.com

PDA2360 Series Plastic Control Stations

MODELS AVAILABLE



PDA2361-A
Acknowledge Relays



PDA2361-R
Reset Total



PDA2361-Q
Silence the Horn



PDA2360-E
Emergency Stop



PDA2361-T
Tare



PDA2361-B
No Text



PDA2361-S
Stop



PDA2362-SS
Start & Stop



PDA2362-AR
Acknowledge Relays
and Reset Total



PDA2362-BB
No Text



PDA2363-SBS
Batch Control



PDA2363-SPS
Batch Control



PDA2364-SBPS
Batch Control




PDA2364-MRUE
ProVu & Helios
Four Buttons


PDA2360 Series Plastic Control Stations

MOUNTING DIMENSIONS

Units: Inches (mm)

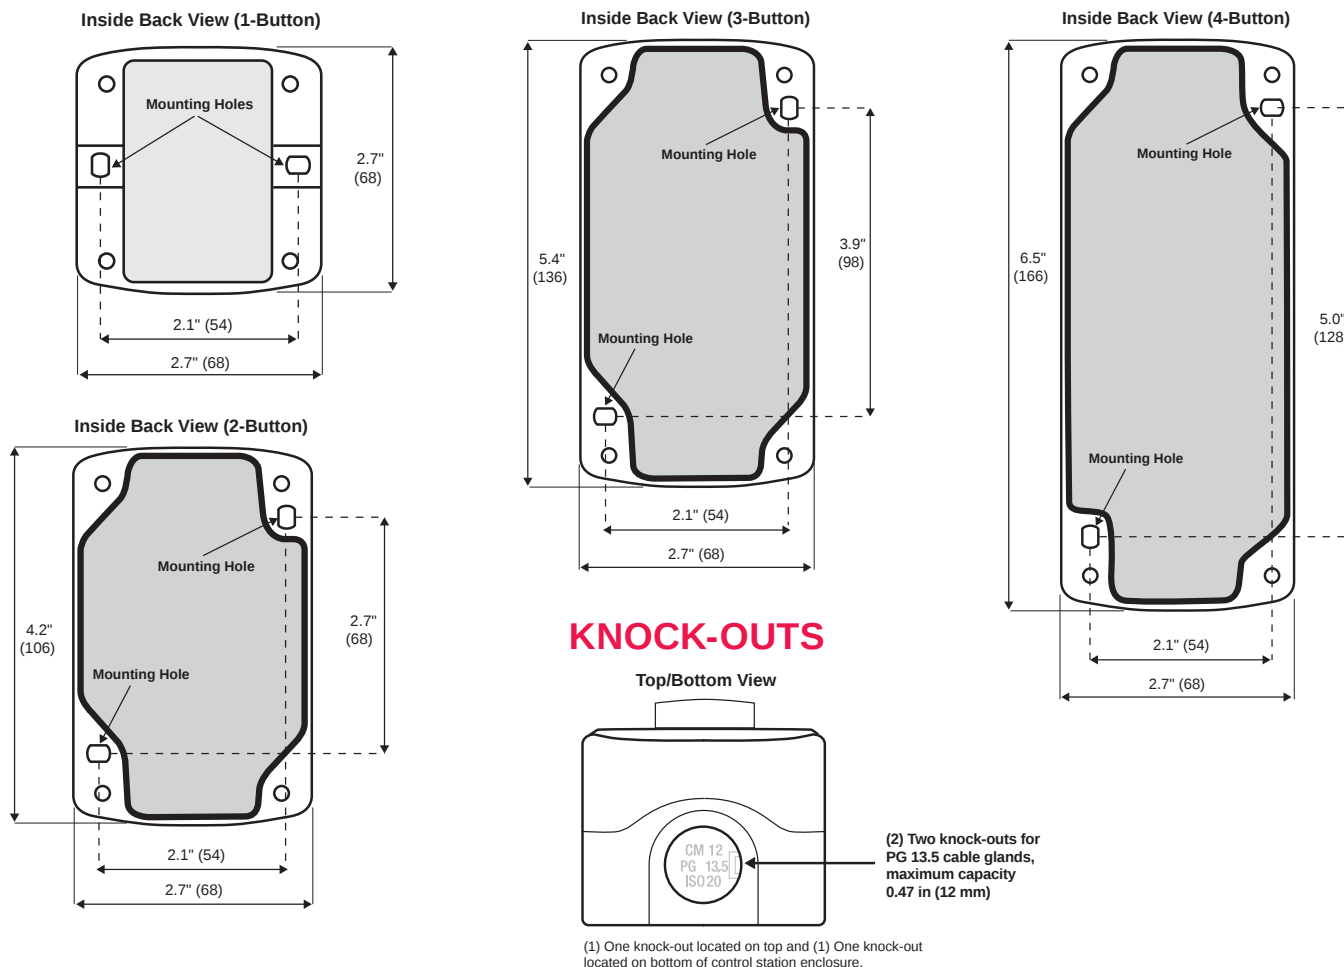

SWITCH TERMINAL BLOCKS

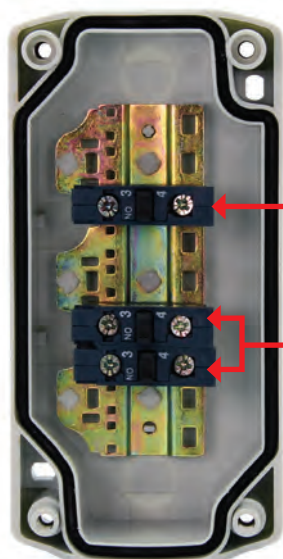

3-Button Control Station Shown

The switch terminal blocks are located inside the back of the control station enclosure.

The terminal blocks are NO (Normally Open) switches.

The number of switch terminal blocks depends on the number of buttons on the control station. The control stations are available with 1, 2, 3 or 4 buttons.

SPECIFICATIONS

<i>Rated Capacity</i>	240V/3A (AC-15 per IEC 947-5-1) 110V/0.6A (DC-14 per IEC 947-5-1)
<i>Contact Resistance</i>	<50mohm
<i>Mechanical Durability</i>	>3x10 ⁴ (spring return button) > 5x10 ³ (latching emergency button)

For applications requiring Normally Closed contacts, order:


Model PDA236X-NC: NC Switch Contact Terminal for Control Stations

PDA2360 Series Plastic Control Stations


OVERALL DIMENSIONS

Units: Inches (mm)


Control Box with (1) One Button

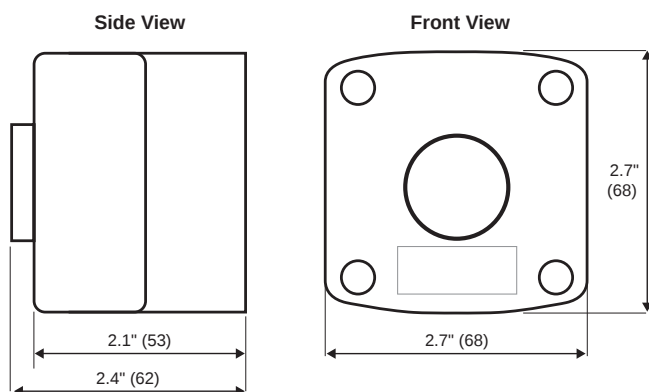


Control Box with (2) Two Buttons

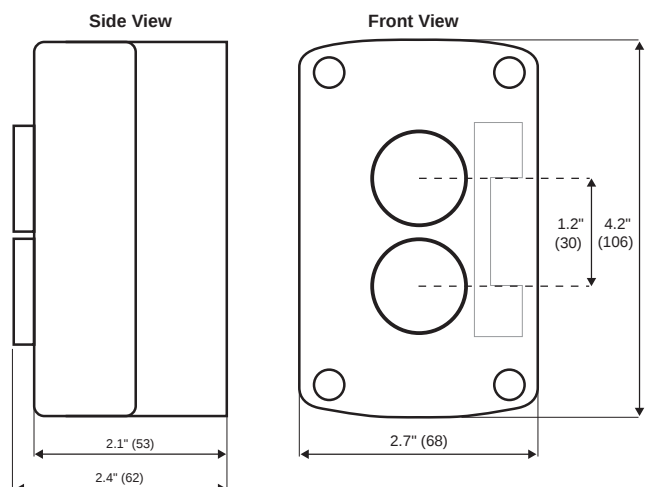


Control Box with (3) Three Buttons

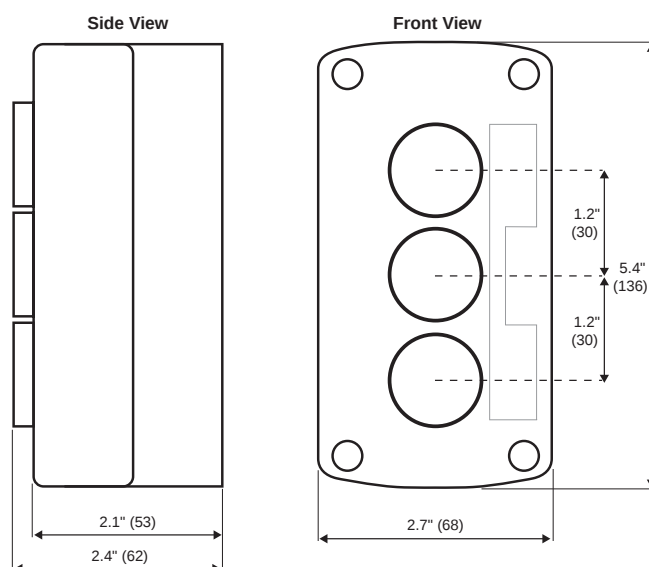


Control Box with (4) Four Buttons

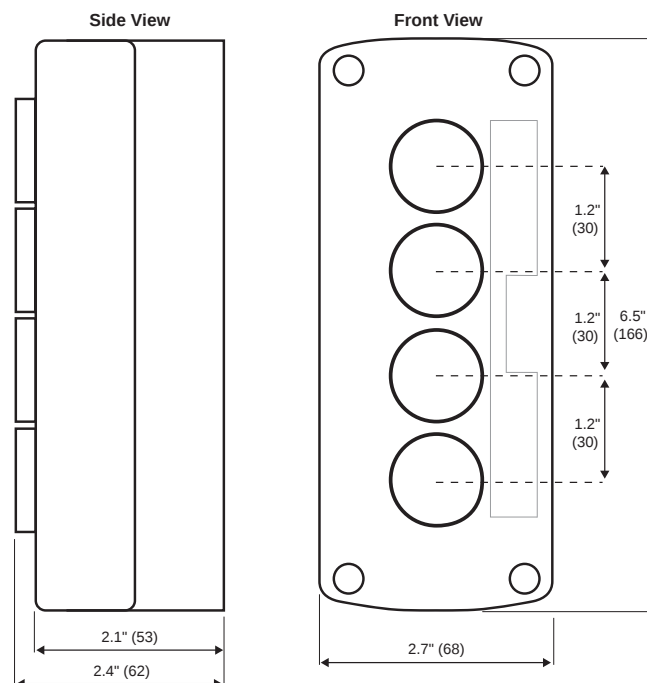

Control Box with Emergency Button

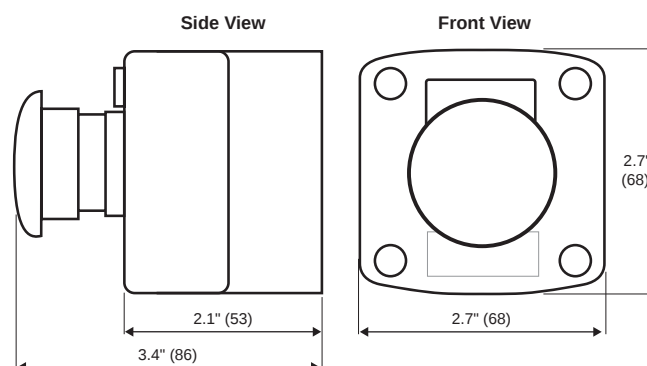

Pushbutton Diameter




Emergency Pushbutton
Actual Size




Bezel Pushbutton
Actual Size

PDA2360 Series Plastic Control Stations


CONNECTIONS

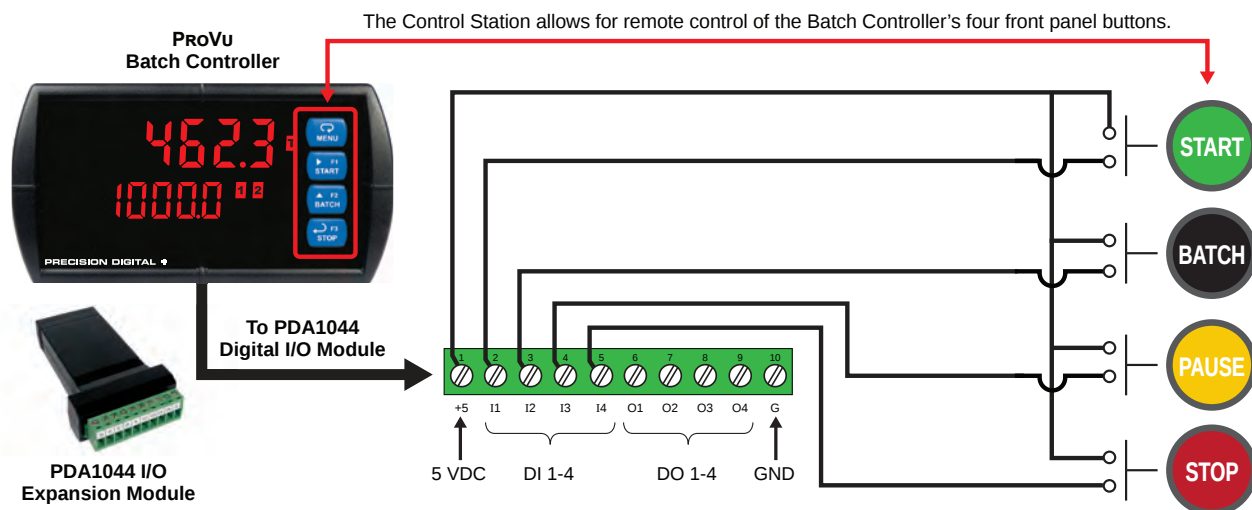

Use the PDA2364-SBPS to remotely operate the ProVu Batch Controller

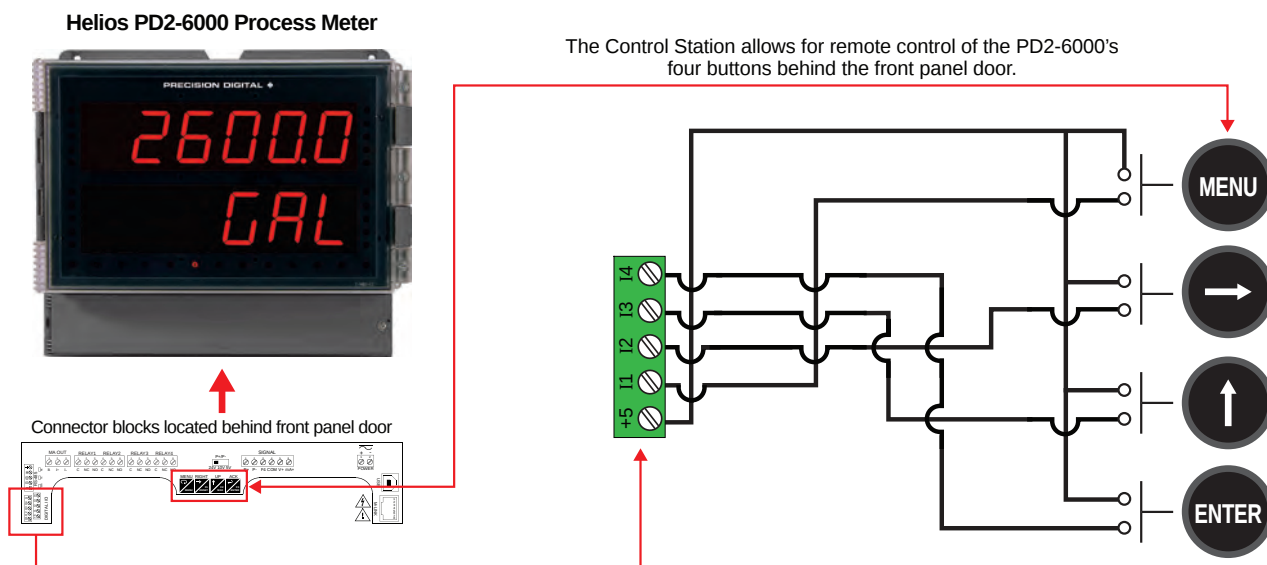

Use the PDA2364-MRUE to remotely control the PD2-6000's four internal programming and operation buttons which are located behind the door below the display.

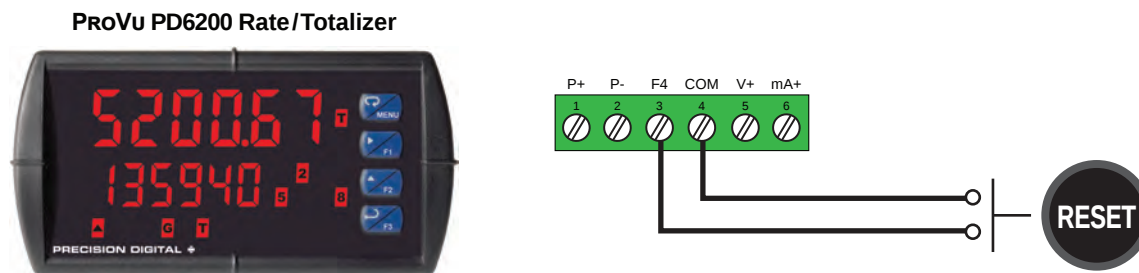

Use the PDA2361-R to reset the total on a Precision Digital rate / totalizer. The reset terminals connect to the F4 terminal on the Precision Digital meter.

PDA2360 Series Plastic Control Stations

SPECIFICATIONS

Pushbuttons: Control Station with 1-4 Normally Open (NO) buttons: red, green, or black flush spring return pushbuttons.

Button Diameter: 1.13" (29 mm)

Emergency Stop Control Station: 1 red, latching, mushroom head pushbutton, turn to release.

Button Diameter: 1.5" (38 mm)

Electrical Blocks: 1, 2, 3, or 4 mounted to the inside back of the enclosure

Cable Entries: Knock-outs for cable-gland on top and bottom of box (CM 12, PG 13.5, and ISO 20).

Maximum capacity: 0.47" (12 mm)

Environment: Operating Temperature Range: - 25 to + 70° C, Protection Degree: IP65 (IEC 529) and NEMA 4, 4X and 13.

Material: Polycarbonate, color: dark gray lid, light gray base on 1-4 button control stations. Yellow lid, light gray base on emergency control station.

Switch Terminal Blocks:

Rated Capacity: 240V/3A (AC-15 per IEC 947-5-1)

110V/0.6A (DC-14 per IEC 947-5-1)

Contact Resistance: <50mohm

Mechanical Durability: >3x10⁴ (spring return button)

> 5x10³ (latching emergency button)

Weight: Control box with 1 button: 4.0 oz (113g),

Control box with 1 emergency button: 4.8 oz (136g),

Control box with 2 buttons: 6.4 oz (181g),

Control box with 3 buttons: 8.0 oz (227g),

Control box with 4 buttons: 10.4 oz (295g)

ORDERING INFORMATION

PDA2360 Series Control Stations

Model	Description
PDA2360-E	Emergency Stop Button
PDA2361-A	1 Black Ack Button
PDA2361-B	1 Black Button No Text
PDA2361-R	1 Black Reset Button
PDA2361-T	1 Black Tare Button
PDA2361-S	1 Red Stop Button
PDA2361-Q	1 Black Silence Button
PDA2362-AR	1 Black Ack & 1 Black Reset Buttons
PDA2362-BB	2 Black Buttons No Text
PDA2362-SS	1 Green Start & 1 Red Stop Buttons
PDA2363-SBS	1 Green Start, 1 Black Batch, 1 Red Stop Buttons
PDA2363-SPS	1 Green Start, 1 Yellow Pause, 1 Red Stop Buttons
PDA2364-SBPS	1 Green Start, 1 Black Batch, 1 Yellow Pause, 1 Red Stop Buttons
PDA2364-MRUE	4 Black Buttons: Menu, Right, Up, Enter

Accessories

Model	Description
PDA236X-NC	NC Switch Contact Terminal for Control Stations

WARNING

Cancer and Reproductive Harm

Your Local Distributor is:

Disclaimer

The information contained in this document is subject to change without notice. Precision Digital Corporation makes no representations or warranties with respect to the contents hereof, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose.

©2019 Precision Digital Corporation. All rights reserved.

LDS2360_A 05/19



PRECISION DIGITAL CORPORATION

1.800.561.8187

www.itm.com

information@itm.com