

RXLdp Ultra-Low Differential Pressure Transmitter

FEATURES

- Current and voltage output signals available
- Custom ranges available
- Board level OEM versions available
- Si-Glass™ technology enables precise measurement and control of very low pressures

TYPICAL USES

- HVAC/R
- Fume Hood Control
- Clean Room/Lab Pressurization
- Laminar Flow
- Leak Detection
- Medical
- Fan Tracking
- Glovebox and Velocity Measurements

PERFORMANCE SPECIFICATIONS

Reference Temperature:	70°F ±2°F (21°C ±1°F)
Accuracy Class:	±1.0% of span (Terminal Point Method: includes non-linearity, hysteresis, non-repeatability, zero offset and span setting errors)
Stability:	±0.5% of span/year at reference conditions
Media Compatibility:	Clean, dry and non-corrosive gas NOT FOR USE ON LIQUIDS
Standard Response Time:	250ms

ENVIRONMENTAL SPECIFICATIONS

Temperature Limits:	Storage: -40°F to 180°F (-40°C to 82°C) Operating: 0°F to 160°F (-18°C to 70°C) Compensated: 40°F to 125°F (4.4°C to 52°C)
---------------------	--

Thermal Coefficients: Zero and Span: ±0.025% of span/°F (from 70°F/21°C reference temperature)

Vibration Sweep: <0.05% span/g temporary effect 0-60Hz

Humidity Effects: No performance effect at 10-95% R.H. noncondensing

EMC: CE model compliant to EN61326: 1997 Annex A. Harmonized heavy industrial transmitter specification

FUNCTIONAL SPECIFICATIONS

Mounting Position Effect: ≥0.5 IWC: ±0.1% of span/g
<0.5 IWC: ±0.25% of span/g
Calibrated horizontally (STD.), unless otherwise specified.
Mounting Position Effect easily corrected with zero potentiometer

Max. Static (Line) Pressure:	Proof:	Burst:
25 psi	15 psid	25 psid



RXLdp
Pressure Transmitter

*See Approvals on page 2 regarding CE and RoHS certifications.



KEY BENEFITS

- Broad temperature capability
- Superior long-term stability and repeatability
- High overpressure protection
- On board voltage regulation allows use of low cost unregulated power supply
- 3 year warranty

ELECTRICAL SPECIFICATIONS

Circuit Protection:	Reverse Wiring Protected	
Potentiometers:	Externally accessible, non-interactive Zero: ±5% of span Span: ±3% of span	
Supply Current:	<6 mA for Voltage output	
Warm-up Time:	5sec (Max.) to meet stated specifications from initial Power-up	
Output Signal:	4-20 mA (2 wire) 0-5 Vdc (3 wire) 1-5 Vdc (3 wire) 1-6 Vdc (3 wire) 0-10 Vdc (3 wire)	12-36 Vdc 12-36 Vdc 12-36 Vdc 12-36 Vdc 12-36 Vdc
Output signal is independent of power supply changes: 12-36 Vdc range without effect on output signal		

RXLdp Ultra-Low Differential Pressure Transmitter

PHYSICAL SPECIFICATIONS

Electrical Connection: Screw Termination

Weight: 4.5 oz

Environmental Rating: NEMA 1

Pressure Connections: 1/8 NPT Female, 1/4 and 1/2 barbed Male

WETTED MATERIAL

Media: Clean, dry air/gases compatible with Aluminum, Titanium, PBT, Buna, Silicon, Glass, Gold, Silicone Rubber, Silicone RTV and Stainless Steel
 NOT FOR USE ON LIQUIDS

NON-WETTED MATERIAL


Housing: Stainless Steel/Lexan

APPROVALS:

*Only units with 4-20 mA output and the 'XCE' option are CE and RoHS compliant.

CE Marked: Per DoC

LOAD LIMITATIONS 4-20 mA OUTPUT

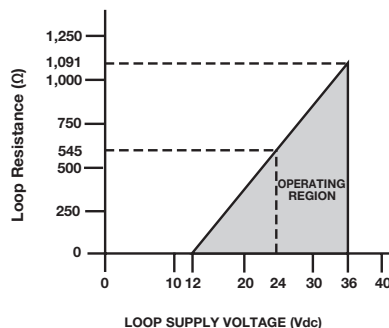

$$V_{min} = 12V + [0.022A \cdot (R_L)]$$


*Includes a 10% safety factor

$$R_L = R_s + R_w$$

R_L = Loop Resistance (ohms)
 R_s = Sense Resistance (ohms)
 R_w = Wire Resistance (ohms)

Featuring a highly reliable variable capacitance sensor using the patented Ashcroft® Si-Glass™ sensor. This ultra-thin single crystal diaphragm provides inherent sensor repeatability and stability.

Sensor Cross Section



The silicon diaphragm sensor has no glues or other organics to contribute to drift or mechanical degradation over time.

RXLdp Ultra-Low Differential Pressure Transmitter


ORDERING CODE	Example:	RX7	F01	42	ST	2IW	-XNH
Model							
RX7 - RXLdp Series, $\pm 1.00\%$ of span, $\pm 0.025\%$ of span T.C. /°F		RX7					
Pressure Connection							
F01 - 1/8" NPT Female			F01				
MB1 - Board level/No case							
MB2 - 1/4" Barbed Male							
MB8 - 1/8" Barbed Male							
Output Signal							
05 - 0-5 Vdc							
10 - 0-10 Vdc							
15 - 1-5 Vdc							
16 - 1-6 Vdc							
42 - 4-20 mA				42			
Electrical Termination							
ST - Screw Terminal					ST		
Pressure Range							
Unidirectional Ranges (differential)							
P1IW - 0.10 IWD							
P25IW - 0.25 IWD							
P5IW - 0.50 IWD							
P75IW - 0.75 IWD							
1IW - 1.00 IWD							
1P5IW - 1.50 IWD							
2IW - 2.00 IWD						2IW	
2P5IW - 2.50 IWD							
3IW - 3.00 IWD							
5IW - 5.00 IWD							
10IW - 10.00 IWD							
25IW - 25.00 IWD							
50IW - 50.00 IWD							
Bi-directional Ranges							
P05IWL - ± 0.05 IWD							
P1IWL - ± 0.10 IWD							
P25IWL - ± 0.25 IWD							
P5IWL - ± 0.50 IWD							
1IWL - ± 1.00 IWD							
2IWL - ± 2.00 IWD							
2P5IWL - ± 2.50 IWD							
5IWL - ± 5.00 IWD							
10IWL - ± 10.00 IWD							
25IWL - ± 25.00 IWD							
50IWL - ± 50.00 IWD							
Option (if indicating an option(s) must include an "X")							
CE - CE Approval (with 4-20 mA only)							-X__
CL - Custom pressure range calibration							
NH - SS tag							NH
NN - Paper tag							
RH - 9 pt. NIST Traceable calibration report							
RK - Back plate adapter							
V9 - Vertical Calibration							
X1 - Fast response time							
X2 - Slow response time							

RXLdp Ultra-Low Differential Pressure Transmitter


DIMENSIONS

For reference only, consult Ashcroft for specific dimensional drawings


MB2 or MB8 Connection

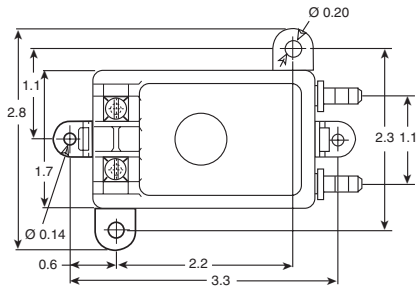

F01 Connection

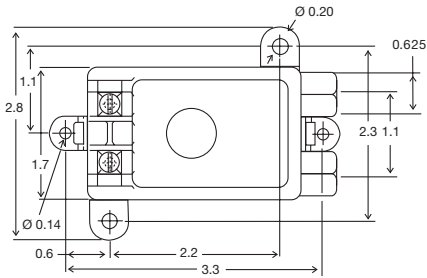

MB2 or MB8 Connection

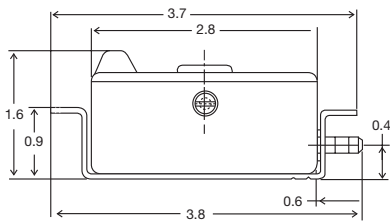

MB1 Board Level

