

How to use the Gecko Gauge:

IMPORTANT: Nail first siding course at desired height before using the Gecko Gauge. No need for further layout.



1 At approximately one-third of your siding's overall length from either end, place the Gecko's blade under bottom edge of siding and slide upward.



2 Engage the handle for a snug fit. **Don't over-tighten!** (See photos A & B)




3 Lower next siding piece into the gauge slots.



4 Nail siding per manufacturer's recommendations. Remove both gauges and repeat steps 1 through 4 as you work upward to top of wall.

Don't over-tighten handle!

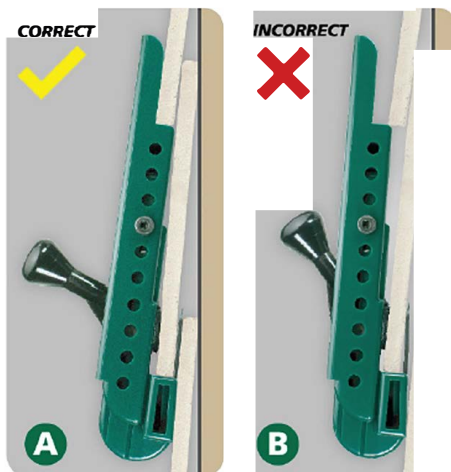

NOTE: Over-tightening handle may cause tool to pull away from siding. As the rubber pad naturally wears over time, the handle can be engaged further for continued use.