
TESTED TO COMPLY WITH

INTRODUCING THE

HIGHEST QUALITY LONGEST RUNNING MOST CONVENIENT

COMPLIANT LED UV-A FLASHLIGHT IN THE WORLD!





WHY CLARITY™?





AUTO SHUT-OFF
Keeps Intensity Above
Minimum Output





THE SPECTROLINE DIFFERENCE

Spectroline has over 60 years of experience working alongside NDT inspectors, engineers, and organization members to design, test, and deliver UV-A inspection lamps of the highest quality.





CLARITY™ 365 SERIES

MODEL	NOMINAL STEADY-STATE UV-A (365 nm) INTENSITY at 15 in (38 cm) ¹	VISIBLE LIGHT MEASUREMENT	UV-A COVERAGE DIAMETER at 15 in (38 cm) at minimum 1,000 μW/cm²
SPN-CLR365-HC	6,750 μW/cm²	< 1 foot-candle (11 lux)	3 in (7.62 cm)
SPN-CLR365-SC	4,500 μW/cm²	< 1 foot-candle (11 lux)	4 in (10.1 cm)

CLARITY 365

Light Source:	(1) UV-A LED
Lamp Style:	Cordless Flashlight
Lamp Head Diameter:	1 in (2.7 cm)
Length:	7 in (17.8 cm)
Weight:	0.8 lbs (363 g) (with Battery)
Power Requirements:	Lithium-Ion Battery
Run Time:	9 hours (continuous)
Charge Time:	6 Hours


 Φ UV-A intensity reading taken with the Spectroline® AccuMAXTM Series meter, and is factory set to the value shown.

CLARITY™ 365 KIT

Kit Includes:

Flashlight with battery, induction charging dock, AC power cord, USB power cord, belt holster, UV-absorbing spectacles, comes in carrying case.

UV-A Beam Profile

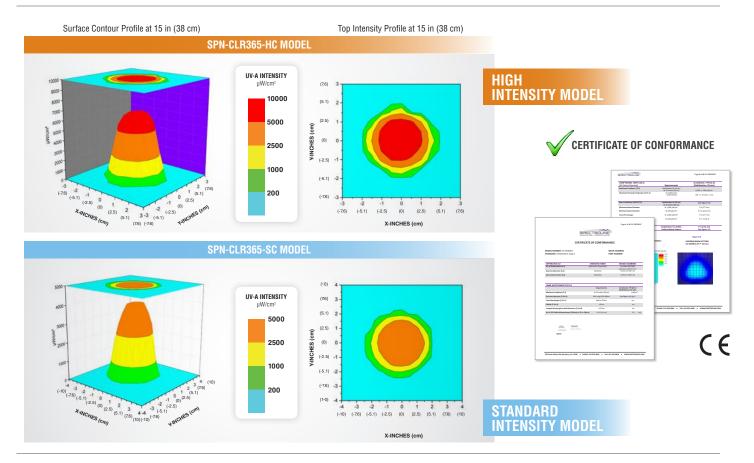



DISTRIBUTED BY:

