


SURFACE THERMOMETER

The REOTEMP Surface Bimetal Thermometer measures temperature on any horizontal surface. The magnetic feet on this model snap it securely to any ferrous surface. It is commonly used on griddles, ovens, motors, piping and tanks.

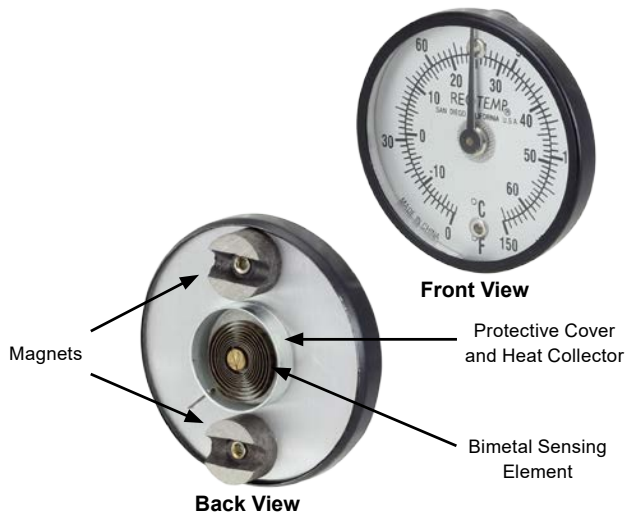

SPECIFICATIONS

Accuracy	± 2% Full Scale
Sensing Element	Precision Calibrated Bimetal Coil
Dial Size	2" (5.08cm)
Dial Material	Aluminum background with black marks.
Case	Aluminum
Lens	Glass
Height	1/2" (1.27cm)
Weight	Approximately 2 ounces (56.7g)
Response Time	Approximately 1 minute.
Mounting	Two magnets on back.

TEMPERATURE RANGE

SUR-15 = 0 to 150°F & -20 to 65°C
SUR-25 = 0 to 250°F & -20 to 120°C
SUR-50 = 0 to 500°F & -20 to 260°C
SUR-75 = 50 to 750°F & 10 to 400°C

— SUR-15

HOW TO ORDER

POCKET BIMETAL THERMOMETER



FEATURES / BENEFITS

- Accurate and Rugged
- Quick Response
- Shock Resistant
- Sensitive Bimetal Element
- External Reset Adjustment
- Waterproof and Dust Proof
- Stainless Steel or Plastic Pocket Case

SPECIFICATIONS

Accuracy	± 2% Full Scale
Dial Size	1" Diameter (25mm)
Dial Material	White background with crisp letters, marks, and numbers.
Stem Length	142 O.D., 5" long, pointed (36mm x 127mm)
Pocket Case	Plastic with clip and holder loop.
Lens	Glass
Reset Nut	7/16 Hex (11mm)
Weight	0.65 Ounces (18.5g)
Packed	1 per box, 12 per carton

TEMPERATURE RANGE

Fahrenheit Ranges
K-79-2 = -40°F to 160°F
K-79-3 = 0°F to 220°F
K-79-4 = 25°F to 125°F
K-79-5 = 50°F to 550°F

Celsius Ranges
K-79-7 = -10°C to 110°C
K-79-8 = 0°C to 150°C
K-79-9 = 0°C to 250°C

— K-79-2

HOW TO ORDER