


YOUR DATA, ANYWHERE, ANYTIME

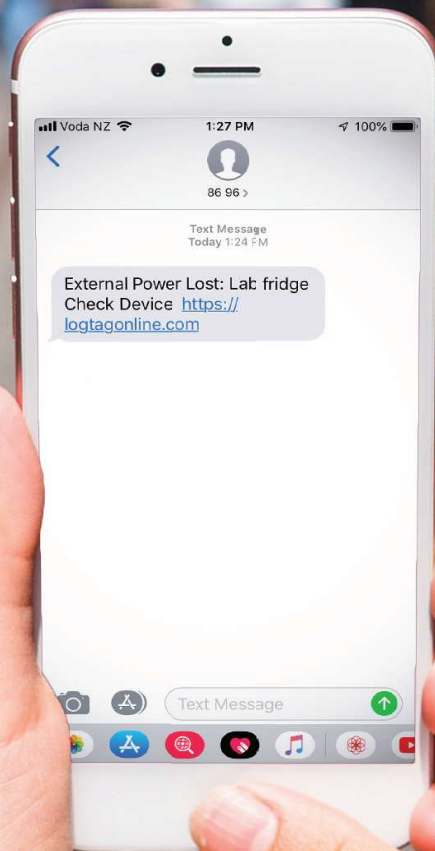


UTRED30-WiFi
30 Day WiFi Logger with Display

LogTag Recorders

1.800.561.8187

www.itm.com

information@itm.com

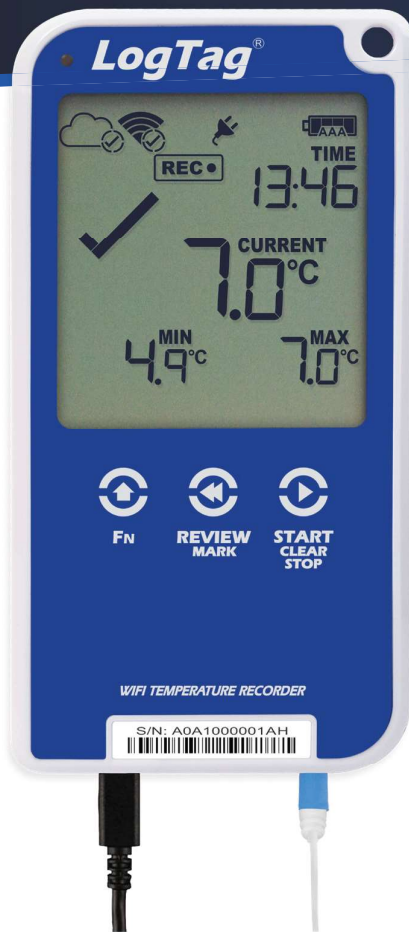


The LogTag® UTRED30-WiFi temperature data logger automatically uploads real-time temperature data to your LogTag® Online cloud account via your existing wireless network.


It features a large, easy-to-read display, along with many familiar attributes known from the LogTag® family of data loggers.

These include non-volatile memory for up to 16,129 temperature readings and a statistical memory, storing maximum and minimum reading as well as alarm duration for each of the last 30 days.


Accessories




2x AAA Batteries
Not Included



USB Cable
Included



AC Adapter
Not Included



Wall Mount
Not Included



Glycol Buffer
Not Included



External Probe
Not Included. (Required)

Sensors are available with a 1.5m or 3m cable.
E.g. ST100L-15 for 1.5m or ST100L-30 for 3m cables.

Compatible probes below:

| | |
|---------------|---|
| ST100J | 40mm tip length, ø3.2mm. |
| ST100K | 65mm tip length, ø3.2mm. |
| ST100L | 90mm tip length, ø3.2mm. |
| ST100S | 30mm tip length, ø5mm. |
| ST100T | 140mm tip length, ø5mm. |
| ST100H | Handled with 105mm tip length, ø5mm. |
| ST100B | Untipped (bare sensor). |
| STX50 | 5 Meter extension cable for ST10/ST100 sensors. |

Features



Real-time data automatically uploaded via WiFi to the LogTag Online cloud.



Download data via LogTag Analyzer or as a PDF (no software required) when WiFi is unavailable.



Read current temperature and latest Min-Max temperature at a glance.




Check and reset Min-Max temperature reading at any time.



Audible alarm and flashing red LED signals a temperature alarm.



View alarm status for up to 30 days at a glance.



Can be powered by 2x AAA batteries (user replaceable) if not external powered.



Measure and store up to 16,000 readings – enough for 67 days at 6 minute logging.



Auto-pause function suspends alarm & statistic processing when the external sensor is unplugged.



Second battery backup via a coin cell to ensure no data is lost.

Applications



Specifications

| | |
|---|---|
| Product Model | UTRED30-WiFi. |
| Sensor Measurement Range | -40°C to +99°C (-40°F to +210°F). |
| Operating Temperature Range | -30°C to +60°C (-22°F to +140°F). |
| Storage Temperature Range | -10 °C to +40 °C (32 °F to +104 °F). |
| Rated Temperature Reading Resolution | 0.1°C or 0.1°F. |
| Rated Temperature Reading Accuracy | Better than ±0.5°C (±0.9°F) for -20°C to +40°C (-4°F to +104°F), typically ±0.3°C (0.6°F). Better than ±0.8°C (±1.4°F) for -40°C to -20°C (-40°F to -4°F), typically ±0.5°C (0.9°F). Better than ±0.8°C (±1.4°F) for +40°C to +70°C (+104°F to +158°F), typically ±0.7°C (1.3°F). Better than ±1.2°C (±2.2°F) for +70°C to +99°C (+158°F to +210°F), typically ±1°C (1.8°F). |
| Recording Capacity | 16,129 temperature readings. 67 days at 6 minute logging. Day summary statistics memory (for display on LCD): up to 30 days of Min/Max/duration and alarm trigger statistics. |
| Sampling Interval | Configurable from 30 seconds to 18 hours. |
| Logging Start Options | Push button start (with configurable start delay from 1 minute to 72 hours) or specific date & time. |
| Download Time | Typically with full memory (16,129 readings) in less than 10 seconds. |
| Environmental | IP51 (when vertically mounted or hung with USB dust-cap in place). |
| Calibration | Factory calibrated using NIST equivalent reference equipment. Calibration certificate available on request. |
| Power Source | 5V via micro USB socket or, 2 x 1.5V AAA batteries. CR2032 LiMnO ₂ coin cell (backup logging function only). |
| Battery Life | Device should normally be powered via USB. AAA batteries provide backup power for up to 2 months. |
| Connection Interface | USB 2.0 / Micro-USB plug. |
| WiFi | IEEE 802.11 / WPA/WPA2 security. |
| Size | 141mm(H) x 72mm(W) x 18mm(T). |
| Weight | 158g with AAA batteries, (134g - excluding probe and AAA batteries). |
| Case Material | Polycarbonate. |



Connection Software

Real-time data automatically uploaded via WiFi to the LogTag Online cloud.

