

MEETS SPECIFICATIONS OF



EN ISO:3059

SPECTROLINE®  
NDT

## uVision™ 365 STANDARD SERIES



Also Available

IP Rated, Fanless LED UV-A Inspection Lamps

UV-365ES, UV-365EH, & UV-365MEH

- ▶ Compact, cost-effective handheld inspection lamps
- ▶ Available in two intensities to suit your specific needs: **standard-intensity** & **high-intensity**
- ▶ Can be used in forensics, specialty UV applications, and NDT/NDE
- ▶ Mobile AC/DC version available!

IP65  
RATED



Dust Tight &  
Water Resistant



Fanless &  
Cool Running



Lightweight  
& Rugged

FOR FLUORESCENT INSPECTION  
IN ANY INDOOR / OUTDOOR  
ENVIRONMENT

### 3 UV-A LEDS

For wide and even  
area of coverage

### WHITE LIGHT LED

Allows for scanning  
surface flaws

### LONG-LASTING UV-A LENSES

Reduce the rate of  
solarization

### EASY CONTROL

Grip-mounted, three-way rocker  
switch (white light/off/UV)

### FANLESS DESIGN

Maintains optimum lamp  
temperature using state-of-  
the-art heat sinks

### PISTOL GRIP

Comfortable,  
balanced control



CERTIFICATE OF  
LIGHT OUTPUT  
included with lamp



1.800.561.8187

www.itm.com

information@itm.com





# uVision™ 365 UV-365 STANDARD SERIES

MODEL	NOMINAL STEADY-STATE UV-A (365 nm) INTENSITY at 15 in (38 cm) ①	VISIBLE LIGHT MEASUREMENT	UV-A COVERAGE AREA at 15 in (38 cm) at minimum 1,000 µW/cm²	AC/DC MOBILE VERSION
UV-365ES*	4,700 µW/cm²	< 1 foot-candle (11 lux)	6.5 in (16.5 cm) Diameter	
UV-365EH*	7,000 µW/cm²	< 1 foot-candle (11 lux)	7 in (17.8 cm) Diameter	
UV-365MEH*	7,000 µW/cm²	< 1 foot-candle (11 lux)	7 in (17.8 cm) Diameter	●

Light Source:	(3) UV-A LEDs, (1) white light LED
Lamp Style:	Pistol grip
Lamp Head Diameter:	3.3 in (8.38 cm)
Height:	7.5 in (19 cm)
Width:	3.5 in (8.9 cm)
Weight:	1.7 lb (0.73 kg) (without battery pack)
White Light LED Intensity:	400 foot-candles (4,306 lux)
Power Requirements:	100-120VAC / 12VDC (Also available in 230V & 240V versions)
Battery Pack:	Type: 12V, NiMH (rechargeable) Run time: 3.5 hours continuous Charge time: 2 hours

① UV-A intensity reading taken with the Spectroline® AccuMAX™ Series meter, and is factory set to the value shown.

\*Each lamp is fitted with an 8-foot cord and the appropriate plug for the country of destination. An optional 20-foot cord is available. The "/20" suffix denotes the 20-foot power cord options.


**uVision™ 365**  
AC/DC MOBILE KIT

**UV-365MEH**

**Kit Includes:**  
Lamp with AC power supply, UV-absorbing spectacles, battery pack with 12V rechargeable NiMH battery, comes in a padded case.

**CERTIFICATE OF LIGHT OUTPUT**

## UV-A Beam Profiles

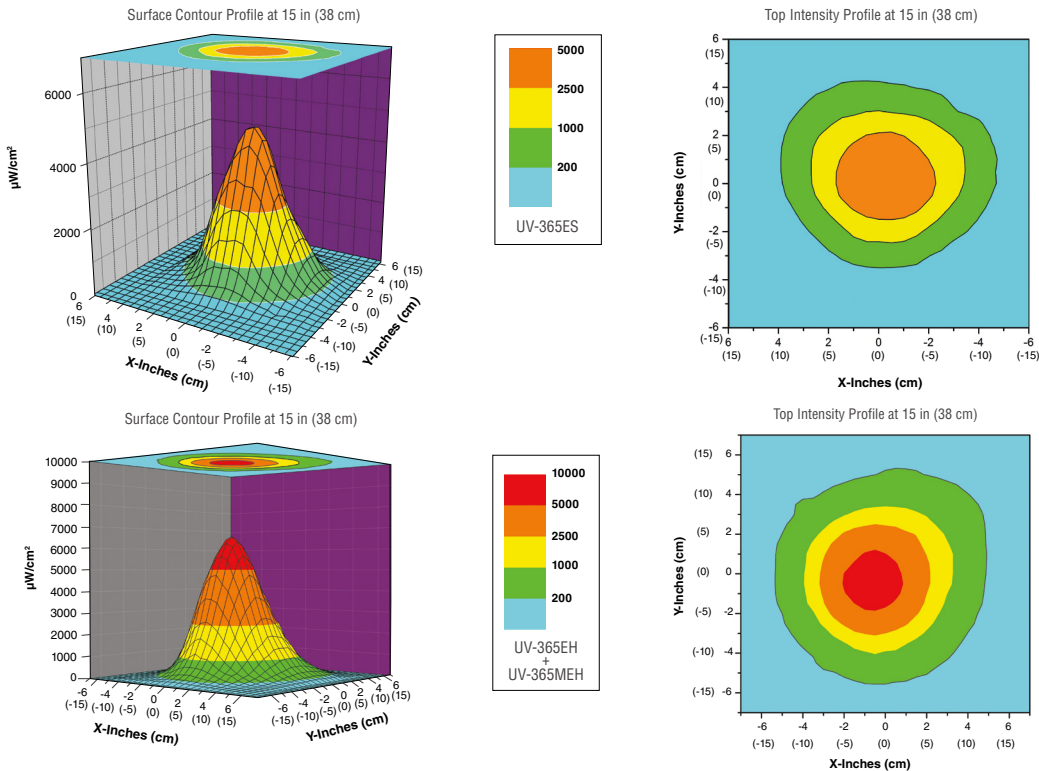

DISTRIBUTED BY: