







About Schneider Electric

Schneider Electric is leading the Digital Transformation of Energy Management and Automation in Homes, Buildings, Data Centers, Infrastructure and Industries. With global presence in over 100 countries, Schneider is the undisputable leader in Power Management - Medium Voltage, Low Voltage and Secure Power, and in Automation Systems. We provide integrated efficiency solutions, combining energy, automation and software.

In our global Ecosystem, we collaborate with the largest Partner, Integrator and Developer Community on our Open Platform to deliver real-time control and operational efficiency.

We believe that great people and partners make Schneider a great company and that our commitment to Innovation, Diversity and Sustainability ensures that Life Is On everywhere, for everyone and at every moment.

www.se.com

Life Is On Schneider

Electric

Discover Life is On

Discover EcoStruxure

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this guide are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owners. This guide and its content are protected under applicable copyright laws and furnished for informational use only. No part of this guide may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric. Schneider Electric does not grant any right or license for commercial use of the guide or its content, except for a non-exclusive and personal license to consult it on an "as is" basis. Schneider Electric products and equipment should be installed, operated, serviced, and maintained only by qualified personnel. As standards, specifications, and designs change from time to time, information contained in this guide may be subject to change without notice. To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this material or consequences arising out of or resulting from the use of the information contained herein.




About this Catalog and Online Resources

Welcome to the Schneider Electric Valves and Actuators Catalog

Superior engineering, product design patents, ISO9001 certification, and Six Sigma lean manufacturing ensures our products conform to the highest standards of internationally recognized quality to deliver solid performance, unsurpassed value and exceptional reliability.

Learn more at www.se.com/v-a

Note: Installers and technicians should stay updated on the "Recommendations/ Best practices and Hazard Warnings". It is recommended to view this catalog in its electronic PDF version (Acrobat Reader required) for quick and easy access to assets, from software and firmware to technical documentation, as well as sales and marketing collateral.

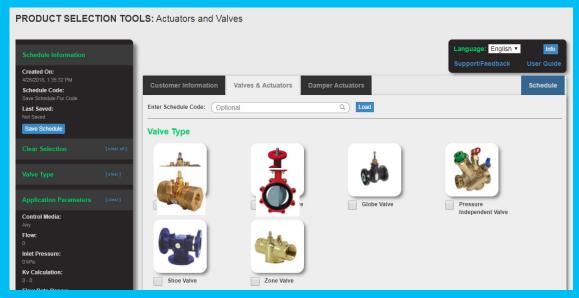

Online Valve and Actuator Selection Tool

The Valve and Actuator Selection Tool is a dynamic sizing tool designed to provide a very quick and simple way of choosing the most appropriate product for your application. A wealth of information is at your fingertips with full technical details and quick access to key product documentation.

Sizing and selection for all HVAC valves and actuators

- Ball Valves
- Butterfly Valves
- Globe Valves
- Pressure Independent Balancing Control Valves
- Zone Valves
- Shoe Valves
- Damper Actuators

Features

- Intuitive selection based on calculators and/ or dropdown menus.
- Customer and partner profiles possible in any schedule creation.
- Valve and Actuator selection feature to create schedule of hydronic systems.
- Ability to create own or add to hydronics a schedule of damper actuators.
- Ability to view, edit, change, communicate and adjust schedules. Download completed schedules to Excel, PDF, and BOM.
- Ability to save schedules in progress to be worked on later or for use as a template for future projects.

Browser compatibility

 Chrome (preferred). Use of other browsers may exhibit unintented behaviors



About this Catalog and Online Resources

mySchneider Sales Mobile App

Bring more "wow" to your customer meetings! mySchneider mobile app enables sales teams to share the latest marketing and sales content via their mobile device to make meetings and follow-up more productive.

With the mySchneider App you can:

- Easily access and view the latest assets (e.g., videos, presentations, specification sheets) while online
- Download assets for availability while offline
- Electronically mark up assets (highlight, pen) and save changes
- Manage a personal "channel" with your own presentation content
- · Email assets to others (customers, consultants) and manage sharing activities/history
- Receive news and notifications on updates directly on your device
- To download mySchneider for iOS devices, visit the ITunes® App Store (search for "mySchneider") or link to (in the U.S.):
 - mySchneider on the App Store on iTunes.
 - For Android devices, access the app in the Google Play store by searching for "mySchneider." See the Play Store for Android system requirements.

You must self-register on mySchneider before using the mobile app. Register at: https://idp.se.com/u/signup/



Table of Contents

Ball Valves and Actuators	6
Butterfly Valves and Actuators	28
Damper Actuators	45
Foot Mounted Actuators	60
Globe Valves and Actuators	70
Pressure Independent Balancing and Control Valves and Actuators	177
Zone Valves	204
Guide Specification Text	214

Disclaimers

- Not all products in the guide may be available in every country, please check availability with the local Schneider Electric office.
- Some product images are not images of the exact model, but are represented by a "series" image.
- Information within this guide is subject to change without notice.
- $\bullet \ \ \text{Schneider Electric is not responsible for inadvertent typographical errors or omissions}.$



Ball Valves and Actuators

Overview VBB/VBS Valves with M2/M3 Actuators

Application

The VBB and VBS Series Valves with SmartX Actuators are 2-way or 3-way, 1/2" or 3/4", characterized ball valves. The M3 and M2 SmartX Actuators are direct coupled to the VBB/VBS Series valves and accept two-position, floating or proportional control signals from a DDC system, controller, or thermostat for control of hot or chilled water, or solutions of up to 60% glycol. Typical applications include VAV reheat, fan coil units, hot and chilled water coils in the air handling units, heat pumps and unit ventilators.

Features

- Easy product selection all actuators fit all valve bodies
- Fast, easy actuator installation no linkage or tool required
- Flow characterizing insert provides equal percentage flow characteristic for stable, accurate floating and proportional control.
- ANSI IV seat leakage (0.01%) for both 2-way and 3-way valves (A and B port)
- Brass and stainless steel trim models
- Cvs from 0.3 10
- Normally open, normally closed, and non-spring return assemblies available
- Two-position, floating or proportional (0 5 VCD, 0 10 Vdc, 5 10 Vdc, or 4 – 20 mA dc)
- Proportional actuator is direct or reverse acting
- RoHS Compliant (VBS Assemblies)
- Reach compliant

Applicable Literature

- VBB and VBS Series Two-position Spring-Return Ball Valves installation instructions, F-27392
- VBB and VBS Series Floating Spring Return and Non-spring Return Ball Valves installation instructions, F-27393
- VBB and VBS Series Proportional Spring Return and Non-spring Return Ball Valves installation instructions, F-27394
- VBB and VBS Series Brochure, F-27681
- EN-205 Water System Guidelines, F-26080
- EN-206 Guidelines for Powering Multiple Actuators, F-26363










Ordering VBB/VBS Ball Valve Assemblies

Specify nine part number fields to determine the Valve Actuator Assembly part number.

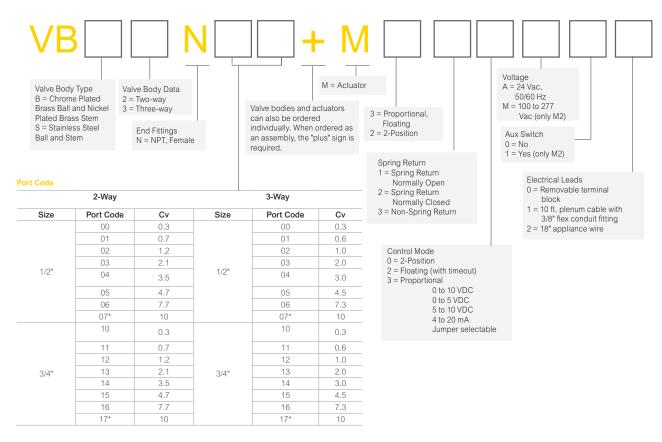


^{*} full port


M2/M3 Actuator/Valve Specifications

Application Schematics Typical applications

For simplicity, balancing valves and control devices are not shown.

Mixing applications





Specifications Actuator	
Supply Voltage	24 Vac for floati ng and proportiona 100–277 Vac for two position multi-voltage types
Power Requirements	See Table-1, Table-2, and Table-3
Control Signal	2-Position, Floating, or Proportional; half wave rectified power supply
Timing, Full Open to Full Close	See Table-1, Table-2 and Table-3
Manual Operating Lever / Position Indicator	Standard on all models
Auxiliary End Switch (optional)	SPST 24 Vac/Vdc, 101 mA-5 A max
Materials	Thermoplastic base and cover Approved for use in air plenums
Shipping & Storage Temperature Limit	- 40-169°F (-40-76°C)
Operating Temperature Limit at max fluid temp. Floating Proportional Two-Position Humidity	32–140°F (0–60°C 32–140°F (0–60°C 32–169°F (0–76°C 5–95% relative humidity, non-condensing
Locations	NEMA 2, IEC IP31. Indoor Use Only
Valve	
Service ^a	Hot and chilled water, up-60% glycol
System Static Pressure Limit	600 psi (4137 kPa)
Fluid Temperature Limit	20-250°F (-7-121°C)
Cv (Kv)	See Tables 4 through 7
Close-off Pressure ^b	30 psi 2-Way; 70 psi 3-Way
Differential Pressure	30 psi normal operation 20 psi quiet operation
Seat Material	PTFE
Characterized Insert	Glass-filled PEEk
Seat Leakage	ANSI class IV (0.01%) at both A and B ports with pressure at inlet
End Connections	NPT threaded (VBxxNxx
Rangeability	Greater than 300:1
Body Material	Forged brass
Stem Material	Stainless steel anti-blow out stem with dual Viton™ o-rings
Ball Material	Chrome plated brass (VBB series) or stainless steel (VBS series)

а.	Not	rated	for	steam	service.

b. Close-off is defined as the maximum allowable pressure drop to which a valve may be subjected while fully closed.

Agency listings	
Supply Voltage	24 Vac for floating and proportiona 100–277 Vac for two position multi-voltage types
Power Requirements	See Table-1, Table-2, and Table-3
Control Signal	2-Position, Floating, or Pro- portional; half wave rectified power supply
Timing, Full Open to Full Close	See Table-1, Table-2 and Table-3
Manual Operating Lever / Position Indicator	Standard on all models
Auxiliary End Switch (optional)	SPST 24 Vac/Vdc, 101 mA-5 A max
Materials	Thermoplastic base and cover Approved for use in ai plenums
Shipping & Storage Temperature Limit	-40-169°F (-40-76°C)
Operating Temperature Limit at max fluid temp. Floating Proportional Two-Position Humidity	32–140°F (0–60°C) 32–140°F (0–60°C) 32–169°F (0–76°C) 5–95% relative humidity, non- condensing
Locations	NEMA 2, IEC IP31. Indoo Use Only



M2/M3 and Valve Selection and Flow Direction

Ball Valve Assembly Selection Procedure


- Select the actuator. When selecting a ball valve assembly, you must know the control signal type and voltage to first select an actuator. Consult the following tables: Table-1 covers two-position actuator specifications and model numbers, Table 2 covers floating actuator specifications and model numbers and Table-3 covers proportional actuator specifications and model numbers
- 2. Select the valve body. The valve body model number is selected based on the line size (1/2" or 3/4"), ball material trim, and flow coefficient (Cv/Kv) required. Consult Table-4 and Table-5 for brass trim valve body specifications and model numbers and Table-6 and Table-7 for stainless steel trim valve body specifications and model numbers. See "Flow Coefficient Selection" for information in determining the flow coefficient.

Other considerations


- General service conditions: Make sure the actuator is suitable for the anticipated ambient conditions and that the valve body
 is compatible with the system fluid temperature and pressure requirements.
- 2. Close-off pressure: Confirm that the VBB/VBS ball valve's close off rating is suitable for the valve control application.
- 3. Space requirements: If mounting space limitations are a consideration, check the actuator/valve assembly dimensions.
- 4. Pipe reducers: Refer to the tables herein (F-27395) for estimating effective Cvs when using pipe reducers.
- 5. Ordering information. You may order the actuator and valve body separately or as a factory assembly. To order a complete valve and actuator assembly, specify the valve body part number and the actuator part number separated by a "+." Example: To order an actuator valve body VBB2N15 and M312A00 as a factory valve/actuator assembly, specify VBB2N15+M312A00.


Flow Direction

A notch cut into the stem indicator at the tip of the valve stem is an external indicator of where the closed portion of the ball sits internally. Check the notch position prior to assembling the actuator to verify the ball is orientated in the correct plane.





In the drawings below, the black mark on the stem indicator represents this stem notch.





Three-Way, A-Port Open, B-Port Closed





Three-Way, A-Port Closed, B-Port Open



M2/M3 Two-position, Floating, and Proportional Actuators

Product Selection: Actuators

Table-1: Two-Position Actuators

Part Number	Control Signal	Power Loss Action (Valve Normal Position)	VA / Voltage	Leads	Stroke Timing	Spring Return Timing	End Switch		
M210A00				Removeable Terminal Block ^b					
M210A01 M210A11				10 ft. (3.05 m) Plenum Cable ^c			SPST		
M210A02		Normally Open	3.5/1.8 at 24 Vac/24 Vdc	18 in. (45 cm) Appliance Wire			01 01		
M210A12				10 III. (43 CIII) Appliance Wife			SPST		
M210M02				6.0/6.0 at 100–277	18 in (45 cm) Annliance Wire				
M210M12	Two- Position			Vac, 50/60 Hz	Vac, 50/60 Hz	() ()	50 sec	35 sec.	SPST
M220A00	100-10311011				Removeable Terminal Block ^b		00 300.		
M220A01				10 ft. (3.05 m) Plenum Cable ^o					
M220A11			3.5/1.8 at 24 Vac/24				SPST		
M220A02		Normally Closed	Vdc						
M220A12				18 in. (45 cm) Appliance Wire			SPST		
M220M02			6.0/6.0 at 100-277	10 m. (45 cm) Appliance Wife					
M220M12			Vac, 50/60 Hz				SPST		

Table-2 Floating Actuators

Don't November	Control Signal		VA @ 24 Vac	A @ 24 Vac 50/60 Hz Leads	Stroke Time,	Time-out Delay,
Part Number			50/60 Hz		sec. 50/60 Hz	sec. 50/60 Hz
M332A00				Terminal Block ^b		
M332A01		(Non-Spring Return)	2.3/2.4	10 ft. (3.05 m) Plenum Cable ^c		
M312A00				Terminal Block ^b	159/135	181 Sec
M312A01	Floating	Normally Open	3.2/3.3 ^d	10 ft. (3.05 m) Plenum Cable ^c	159/135	101 Sec
M322A00			3.2/3.3	Terminal Block ^b		
M322A01		Normally Closed		10 ft. (3.05 m) Plenum Cable ^c		

Table-3 Proportional Actuators

Part Number	Control Signal	Power Loss Action (Valve Normal Position)	VA @ 24 Vac 50/60 Hz	Leads	Stroke Time, sec. 50/60 Hz	Time-out Delay, sec. 50/60 Hz
M333A00				Terminal Block ^b		200/166
M333A01		(Non-Spring Return)	2.7/2.8	10 ft. (3.05 m) Plenum Cable ^c		
M313A00	Proportional ^a (Vdc: 0-5, 0-10, 2-10,			Terminal Block ^b	159/135	
M313A01	5–10, 4–20 mA ^{dce})	Normally Open	2.7/2.8 ^d	10 ft. (3.05 m) Plenum Cable ^c	-	145 Sec
M323A00				Terminal Block ^b		
M323A01		Normally Closed		10 ft. (3.05 m) Plenum Cable ^c	_	

a.Default configured for $0-10\,\mathrm{Vdc}$ input signal, direct acting control.



b. All terminal block and appliance wire units accept a 1/2" conduit connector fitting (.875" diameter).
 c. All plenum cable units include an integral 3/8" conduit connector fitting.
 d. Size transformer for 10 VA per actuator.

e. For 4–20 mA control, a separate isolated transformer must be used with each valve.

2-Way and 3-Way Brass and Stainless Steel Trim Valves

Brass Trim Valves

Table-4. 2-Way Brass Trim Valve Bodies End Connection: NPT

Size	Part Number	Cv (Kv)
	VBB2N00	0.3 (0.3)
	VBB2N01	0.7 (0.6)
	VBB2N02	1.2 (1.0)
1/2"	VBB2N03	2.1 (1.8)
1/2	VBB2N04	3.5 (3.0)
	VBB2N05	4.7 (4.1)
	VBB2N06	7.7 (6.7)
	VBB2N07 b	10 (8.7)
	VBB2N10	0.3 (0.3)
	VBB2N11	0.7 (0.6)
	VBB2N12	1.2 (1.0)
	VBB2N13	2.1 (1.8)
3/4"	VBB2N14	3.5 (3.0)
	VBB2N15	4.7 (4.1)
	VBB2N16	7.7 (6.7)
	VBB2N17 b	10 (8.7)

b. Full Port Model without characterized disc.

Table-5. 3-Way Brass Trim Valve Bodies
End Connection: NPT

Size	Part Number	Cv (Kv) A Port	Cv (Kv) B Port
	VBB3N00	0.3 (0.3)	0.3 (0.3)
	VBB3N01	0.6 (0.5)	0.8 (0.7)
	VBB3N02	1.0 (.85)	0.8 (0.7)
4 (01)	VBB3N03	2.0 (1.7)	1.5 (1.3)
1/2"	VBB3N04	3.0 (2.6)	1.5 (1.3)
	VBB3N05	4.5 (3.9)	2.7 (2.3)
	VBB3N06	7.3 (6.3)	4.1 (3.5)
	VBB3N07b	10.0 (8.7)	4.8 (4.1)
	VBB3N10	0.3 (0.3)	0.3 (0.3)
	VBB3N11	0.6 (0.5)	0.8 (0.7)
	VBB3N12	1.0 (.85)	0.8 (0.7)
	VBB3N13	2.0 (1.7)	1.5 (1.3)
3/4"	VBB3N14	3.0 (2.6)	1.5 (1.3)
	VBB3N15	4.5 (3.9)	2.7 (2.3)
	VBB3N16	7.3 (6.3)	4.1 (3.5)
	VBB3N17b	10.0 (8.7)	4.8 (4.1)

b. Full Port Model without characterized disc.

Stainless Steel Trim Valves

Table-6. 2-Way Stainless Steel Trim Valve Bodies End Connection: NPT

Size	Part Number	Cv (Kv)
	VBS2N00	0.3 (0.3)
	VBS2N01	0.7 (0.6)
	VBS2N02	1.2 (1.0)
	VBS2N03	2.1 (1.8)
1/2"	VBS2N04	3.5 (3.0)
	VBS2N05	4.7 (4.1)
	VBS2N06	7.7 (6.7)
	VBS2N07 b	10 (8.7)
	VBS2N10	0.3 (0.3)
	VBS2N11	0.7 (0.6)
	VBS2N12	1.2 (1.0)
	VBS2N13	2.1 (1.8)
3/4"	VBS2N14	3.5 (3.0)
	VBS2N15	4.7 (4.1)
	VBS2N16	7.7 (6.7)
	VBS2N17 b	10 (8.7)

b. Full Port Model without characterized disc.

Table-7. 3-Way Stainless Steel Trim Valve Bodies End Connection: NPT

Size	Part Number	Cv (Kv) A Port	Cv (Kv) B Port
	VBS3N00	0.3 (0.3)	0.3 (0.3)
	VBS3N01	0.6 (0.5)	0.8 (0.7)
	VBS3N02	1.0 (.85)	0.8 (0.7)
	VBS3N03	2.0 (1.7)	1.5 (1.3)
1/2"	VBS3N04	3.0 (2.6)	1.5 (1.3)
1/2	VBS3N05	4.5 (3.9)	2.7 (2.3)
	VBS3N06	7.3 (6.3)	4.1 (3.5)
	VBS3N07b	10.0 (8.7)	4.8 (4.1)
	VBS3N10	0.3 (0.3)	0.3 (0.3)
	VBS3N11	0.6 (0.5)	0.8 (0.7)
	VBS3N12	1.0 (.85)	0.8 (0.7)
	VBS3N13	2.0 (1.7)	1.5 (1.3)
3/4"	VBS3N14	3.0 (2.6)	1.5 (1.3)
	VBS3N15	4.5 (3.9)	2.7 (2.3)
	VBS3N16	7.3 (6.3)	4.1 (3.5)
	VBS3N17b	10.0 (8.7)	4.8 (4.1)

b. Full Port Model without characterized disc.

Application Note for 2-Way and 3-Way Valves

VBB/VBS Series Ball Valves are Characterized Control Ball Valves designed so that flow through the A-port exhibits equal percentage flow, thus the A-port is the control port. In a 3-way valve, the B-port is the bypass port and flow through the B-port is designed to be less than that of the A-port. In most applications, this reduced flow compensates for the pressure drop seen by the coil supplied by the A-port.



VB-2000 Series Ball Valves with SmartX Actuators

Product description

The Schneider Electric VA, VF, and VS-2xx3-xxx-9-xx series Ball Valve Assemblies are complete actuator/valve assemblies that accept Two-position, floating, or proportional control signals from a DDC system or a thermostat, for control of hot or chilled water, or solutions of up to 50% glycol. They consist of direct-coupled SmartX Spring Return or Non-Spring Return Actuators mounted on 2-way (1/2" to 3") and 3-way (1/2" to 2") ball valve bodies. Typical applications include reheat on VAV boxes, fan coil units, hot and chilled water coils in air handling units, and unit ventilators.


Applicable literature

For installation details and considerations, refer to the full Selection Guide F-27086, Ball Valve Assemblies with SmartX Actuators.

•	MA40-704x, MA4x-707x, MA4x-715x Installation	F-26642
•	MF4x-7xx3, MF4x-7xx3-50x Installation	F-26644
•	MS4x-7xx3, MS4x-7xx3-50x Installation	F-26645
•	MF41-6043, MF41-6083 Installation	F-27213
•	MA4D-xxxx, MF4D-xxxx, MS4D-xxxx Installation	F-27170
•	MS41-6043, MS41-6083 Installation	F-27214
•	Mx40-704x Mounting and Wiring Instructions	F-27003
•	Mx41-6043 Data Sheet	F-26737
•	Vx-2xx3-5xx-9-xx, VB-2xx3-500-9-xx	F-27087
•	EN205 Water and Steam System	F-26080




VB-2253-500-9-xx Body/Linkage Assembly with 2-Way Ball Valve




VB-2313-500-9-xx Body/Linkage Assembly with 3-Way Ball Valve

Ball Valve Body/Linkage Assemblies allow field mounting of SmartX Actuators.




Vx-22x3-5xx-9-xx 2-Way Assembly with Spring Return Actuator




Vx-2313-5xx-9-xx 3-Way Assembly with Spring Return Actuator

Vx-2xx3-5xx-9-xx Series Ball Valve Assemblies are available with either spring return or non-spring return SmartX Actuators.



Vx-22x3-8xx-9-xx 2-Way Assembly with Mx4D Series Actuator



Vx-2313-8xx-9-xx 3-Way Assembly with Mx4D Series Actuator

Vx-2xx3-8xx-9-xx Spring Return Valve Assemblies equipped with Mx4D-x0x3 SmartX Actuators, respectively.

Features & Benefits, and Ball Valve Assembly selection

Ball Valve Assembly Selection Procedure

When selecting a ball valve assembly, you must determine the applicable codes for the control signal type, valve body configuration, end connection, port size, and actuator. Select a ball valve assembly part number as follows:

- Control Signal Type, Valve Body Configuration, and End Connection Refer to Ball Valve Assemblies and select the appropriate codes for these part number fields.
- 2. Valve size (Flow Coefficient)
 - If the required flow coefficient (Cv) has not yet been determined, do so as follows:
 - a. Refer to Sizing and Selection to calculate the required Cv.

equipped actuators, refer to actuator specifications.

- b. Select the nearest available Cv and corresponding valve body port code.
- Actuator

Select the appropriate actuator and code according to Ball Valve Assemblies, based on the Control signal type, required valve normal position, and voltage requirements. For detailed actuator information, refer to the applicable actuator specifications.

NOTE: If an actuator with Auxiliary switch(es) is required, you may field-assemble a ball valve assembly using a ball valve body/linkage assembly (VB-2513-500-9-xx). For information on switch-

- Close-off Pressure
 Confirm that the selected actuator and valve body combination provides sufficient close-off pressure. If no close-off pressure is shown, the valve body/actuator combination is not valid.
- Available Space
 Check the appropriate dimensional figure (Figure 1 through Figure 6 on pages 22 to 27) and its accompanying data table for dimension details.


Feature	Benefit
Close-offs of 40 to 130 psi.	Accommodates most close-off requirements.
Available in full range of line sizes, 1/2" to 3" for 2-way valves and 1/2" to 2" for 3-way valves.	Satisfies a wide range of applications.
Cvs from 0.33 to 266.	Permits optimal valve sizing, minimizing the need for pipe reducers
Flow characterizing insert, made of glass-filled Noryl™.	Provides equal percentage flow characteristic so that the heat output of the coil is linear with respect to valve position.
Available in both spring return and non-spring return models.	Allows power loss mode requirement to be met for any given application.
Utilizes SmartX Actuators with two-position, floating, and proportional control.	Models to fit a wide range of applications.
All VB-2000 models equipped with pigtail leads.	Eases installation. Reduced electrician costs.
Low-friction seals and o-rings.	Allows the use of lower-torque actuators, reducing cost.
Valve body made of forged brass ASTM B283-06.	Rated for static pressure of 360 psi at Fluid temperatures of 20 to 250 °F (-7 to 121 °C).
ANSI Class IV (0.01% of Cv) shutoff with 2-way valves.	Allows accurate control, saves energy.
Choices of spring return direction.	Provides Normally Closed or Normally Open spring return.
Thermally isolated mounting plate.	Protects the actuator from excess cold or heat from chilled or hot water passing through the valve. Discourages condensation.
Ball Valve Body/Linkage Assemblies are available separately. They include anti-rotation clips for SmartX Actuators.	Increases flexibility and minimizes inventory.



VB-2000 Series Actuator Part Numbering

Specify five part number fields to determine the Valve Actuator Assembly part number.

SmartX 5xx Actuators

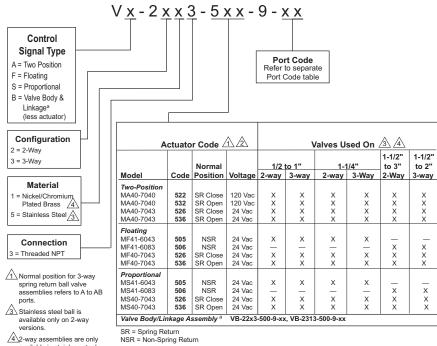


NSR = Non-Spring Return

Note: Not all model configurations are available as factory assemblies. You can purchase the the actuator and a VB-22x3-500-9-xx valve body and linkage separately for field assembly

SmartX 8xx Actuators

available in stainless steel;

3-way only available in nickel/chromium plated

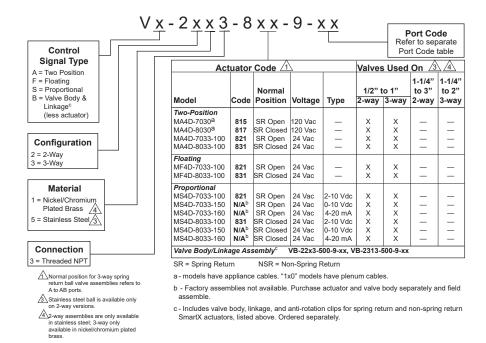

^a Includes valve body, linkage, and anti-rotation clips for spring return and non-spring return SmartX actuators, listed above. Ordered separately.

VB-2000 Series 2-Way and 3-Way Sizes, Port Codes, Cv/Kvs

Port codes 2-Way Ball Valve Assemblies with sizes, port codes, and Cvs.

Size in.	2-Way					
Size III.	Port code	Cva	Kvsa			
	01	0.38	0.33			
	02	0.68	0.59			
	03	1.3	1.1			
1/2	04	2.6	2.2			
	05	4.7	4.1			
	06	8.0	6.9			
	07	11.7 ^b	10.1			
	11	0.31	0.27			
	12	0.63	0.54			
	13	1.2	1.0			
3/4	14	2.5	2.2			
/4	15	4.3	3.7			
	16	10.1	8.7			
	17	14.7b	12.7			
	18	28.6 ^b	24.7			
	21	4.4	3.8			
	22	9.0	7.8			
1	23	15.3	13.2			
	24	26.1	22.6			
	25	28.4b	24.6			
	26	43.9b	38.0			
	27	54.2 ^b	46.9			
	41	4.4	3.8			
	42	8.3	7.2			
11/4	43	14.9	12.9			
1 /4	44	36.5	31.6			
	45	41.1 ^b	35.6			
	46	102.3b	88.5			
	51	22.8	19.7			
1½	52	41.3	35.7			
172	53	73.9 ^b	63.9			
	54	171.7 ^b	148.5			
	61	41.7	36.1			
	63	71.1	61.5			
2	65	108 ^b	93.4			
	66	210	181.7			
	67	266 ^b	230.1			
	71	45	38.9			
	72	55	47.6			
21/	73	72.3	62.5			
21/2	74	101	87.4			
	75	162	140.1			
	76	202b	174.7			
2	82	63	54.5			
3	85	145 ^b	125.4			

a - $Cv = \frac{gpm}{\sqrt{\Delta P}}$ (where DP is measured in psi) $kvs = \frac{Cv}{1.156}$

 $kvs = \frac{m^3/h}{\sqrt{\Delta P}} \text{ (where DP is measured in bar; 1 bar = 100 kPa)}$

b - Denotes a full port valve, without the characterized insert.

3-Way Ball Valve Assemblies - sizes, port codes, and Cvs

Size in.		3-Way	
Size in.	Port code	A port Cva b	Kvsa
	01	0.33	0.28
	02	0.59	0.51
4.10	03	1	0.86
1/2	04	2.4	2.1
	05	4.3	3.7
	06	8.0°	6.9
	11	0.40	0.35
3/4	12	0.66	0.57
	13	1.3	1.1
	14	2.4	2.1
	15	3.8	3.3
	16	11°	9.5
	21	0.40	0.35
	22	0.65	0.56
1	23	1.3	1.1
	24	2.3	2.0
	25	3.5	3.0
	26	4.5	3.9
	27	8.6	7.4
	28	10	8.6
	29	14.9	12.9
	30	22.3°	19.3
	31	30.8°	26.6
	41	4.1	3.5
	43	8.7	7.5
11/4	44	12.7	11.0
	45	19.4°	16.8
	46	34.1°	29.5
	51	4	3.5
	52	8.3	7.2
447	53	13.4	11.6
1½	54	23.5	20.3
	55	32°	27.7
	56	61.1°	52.8
	61	23.9	20.7
	62	38.2	33.0
2	63	56.7°	49.0
	64	108.5°	93.8

a -
$$Cv = \frac{gpm}{\sqrt{\Delta P}}$$
 (where DP is measured in psi) $kvs = \frac{Cv}{1.156}$

kvs = $\frac{\text{m}^3/\text{h}}{\sqrt{\Delta P}}$ (where DP is measured in bar; 1 bar = 100 kPa)


b - B port Cv is 80% of A port Cv. c - Denotes a full port valve, without the characterized insert.



VB-2000 Series 2- and 3-Way Ball Valve Specifications

	sembly series	2-Way	3-Way
	mblies using SmartX tuators	Non-Spring Return Vx-22x3-505-9-P Vx-22x3-506-9-P Spring Return Vx-22x3-5xx-9-P Vx-22x3-5xx-9-P	Non-Spring Return Vx-2313-505-9-P Vx-2313-506-9-P
		Spring Return VA-22x3-81x-9-P Vx-22x3-82x-9-P Vx-22x3-83x-9-P	Spring Return VA-2313-81x-9-P Vx-2313-82x-9-P Vx-2313-83x-9-P
	lications	Chilled or hot water, up to 5	
Type o	f end fitting	NPT Screw	ed
Type o	f end fitting Size	NPT Screwi	ed 1/2" through 2"
Type of Valve ass	f end fitting Size sembly series	NPT Screw 1/2" through 3" Vx-22x3-xxx-9-P	ed 1/2" through 2" Vx-2313-xxx-9-P
Type of Valve ass	f end fitting Size sembly series ow type	NPT Screwi 1/2" through 3" Vx-22x3-xxx-9-P Equal Percen	ed 1/2" through 2" Vx-2313-xxx-9-P tage
Type of Valve ass	f end fitting Size sembly series	NPT Screwi 1/2" through 3" Vx-22x3-xxx-9-P Equal Percen Forged Brass (ASTN	ed
Type of Valve ass	f end fitting Size sembly series ow type	NPT Screwi 1/2" through 3" Vx-22x3-xxx-9-P Equal Percen	ed 1/2" through 2" Vx-2313-xxx-9-P tage
Type of Valve ass	f end fitting Size sembly series sw type Body Ball Characterizing insert	NPT Screw 1/2" through 3" Vx-22x3-xxx-9-P Equal Percen Forged Brass (ASTM 1 = Nickel/Chromium-Plated Brass 5 = Stainless Steel Glass-filled N	ad 1/2" through 2" Vx-2313-xxx-9-P tage M B283-06) Nickel/Chromium-Plated Brass
Type of Valve ass	f end fitting Size sembly series sw type Body Ball Characterizing	NPT Screw 1/2" through 3" Vx-22x3-xxx-9-P Equal Percen Forged Brass (ASTM 1 = Nickel/Chromium-Plated Brass 5 = Stainless Steel Glass-filled N Stainless St	ad 1/2" through 2" Vx-2313-xxx-9-P tage B283-06) Nickel/Chromium-Plated Brass oryl pel
Type of Valve ass	f end fitting Size sembly series sw type Body Ball Characterizing insert	NPT Screw 1/2" through 3" Vx-22x3-xxx-9-P Equal Percen Forged Brass (ASTM 1 = Nickel/Chromium-Plated Brass 5 = Stainless Steel Glass-filled N	ad 1/2" through 2" Vx-2313-xxx-9-P tage B283-06) Nickel/Chromium-Plated Brass oryl pel
Type of Valve ass	f end fitting Size sembly series bw type Body Ball Characterizing insert Stem	NPT Screw 1/2" through 3" Vx-22x3-xxx-9-P Equal Percen Forged Brass (ASTM 1 = Nickel/Chromium-Plated Brass 5 = Stainless Steel Glass-filled N Stainless St Reinforced Teflon® Seals w EPDM O-Rir	ad 1/2" through 2" Vx-2313-xxx-9-P tage 1 B283-06) Nickel/Chromium-Plated Brass oryl seel ith EPDM O-Rings
Type of Valve ass	f end fitting Size sembly series ow type Body Ball Characterizing insert Stem Ball seals	NPT Screw 1/2" through 3" Vx-22x3-xxx-9-P Equal Percen Forged Brass (ASTM 1 = Nickel/Chromium-Plated Brass 5 = Stainless Steel Glass-filled N Stainless St Reinforced Teflon® Seals w	ad 1/2" through 2" Vx-2313-xxx-9-P tage 1 B283-06) Nickel/Chromium-Plated Brass oryl seel ith EPDM O-Rings
Type o Valve ass Flo	f end fitting Size sembly series ow type Body Ball Characterizing insert Stem Ball seals Stem seals	NPT Screw 1/2" through 3" Vx-22x3-xxx-9-P Equal Percen Forged Brass (ASTM 1 = Nickel/Chromium-Plated Brass 5 = Stainless Steel Glass-filled N Stainless St Reinforced Teflon® Seals w EPDM O-Rir	and 1/2" through 2" Vx-2313-xxx-9-P lage 1 B283-06) Nickel/Chromium-Plated Brass oryl seel ith EPDM O-Rings lags lag
Type o Valve ass Flo Material Maximum Maximum opi	f end fitting Size sembly series ow type Body Ball Characterizing insert Stem Ball seals Stem seals Mounting plate	NPT Screw 1/2" through 3" Vx-22x3-xxx-9-P Equal Percen Forged Brass (ASTM 1 = Nickel/Chromium-Plated Brass 5 = Stainless Steel Glass-filled N Stainless St Reinforced Teflon® Seals w EPDM O-Rir Glass-filled Po	and 1/2" through 2" Vx-2313-xxx-9-P tage M B283-06) Nickel/Chromium-Plated Brass oryl sel ith EPDM O-Rings tgs tymer 0 °F (121 °C) wn in Table-4 or Table-6.
Type o Valve ass Flo Material Maximum Maximum op	f end fitting Size sembly series sw type Body Ball Characterizing insert Stem Ball seals Stem seals Mounting plate static pressure erating differential	NPT Screw 1/2" through 3" Vx-22x3-xxx-9-P Equal Percen Forged Brass (ASTM 1 = Nickel/Chromium-Plated Brass 5 = Stainless Steel Glass-filled N Stainless St Reinforced Teffon® Seals w EPDM O-Rir Glass-filled Po 360 psig (25 bar) at 25 Same as close-off pressures sho	and 1/2" through 2" Vx-2313-xxx-9-P tage M B283-06) Nickel/Chromium-Plated Brass voryl sel ith EPDM O-Rings igs gymer 10 °F (121 °C) wn in Table-4 or Table-6. e Pressure Drop" on page 86 ANSI Class IV (0.01% of Cv),
Type o Valve ass Flo Material Maximum Maximum op	f end fitting Size sembly series ow type Body Ball Characterizing insert Stem Ball seals Stem seals Mounting plate static pressure erating differential essure	NPT Screw 1/2" through 3" Vx-22x3-xxx-9-P Equal Percen Forged Brass (ASTM 1 = Nickel/Chromium-Plated Brass 5 = Stainless Steel Glass-filled N Stainless St Reinforced Teffon® Seals w EPDM O-Rir Glass-filled Po 360 psig (25 bar) at 25 Same as close-off pressures shor Refer to "Cavitation Limitations on Valve	and 1/2" through 2" Vx-2313-xxx-9-P tage M B283-06) Nickel/Chromium-Plated Brass foryl sel ith EPDM O-Rings igs lymer 10 °F (121 °C) wn in Table-4 or Table-6. e Pressure Drop" on page 86 ANSI Class IV (0.01% of Cv), piped coil-side outlet to A only

VB-2000 2-Way Ball Valve Assemblies with SmartX Actuators

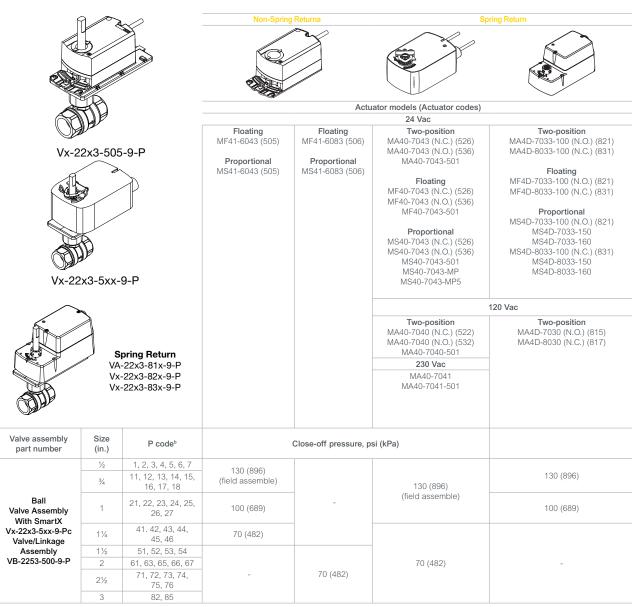

a - For non-spring return, 2-way ball valve assemblies are shipped NO (normally open).




b - To find the corresponding flow coefficients for these port codes, refer to "VB-2000 Series Actuator Part Numbering" on page 14.

c - To determine a specific part number, identify the actuator's Control signal type ("A," "F," or "S"), Actuator code, and P code. Refer to

[&]quot;VB-2000 3-Way Assemblies with SmartX Actuators" on page 18.

VB-2000 3-Way Assemblies with SmartX Actuators

Note: Not all model configurations are available as factory assemblies. You can purchase the actuator and a VB-2253-500-9-xx valve body and linkage separately for field assembly. All valve sizes - ANSI Class IV (0.01% of CK) shut-off piped coil-side outlet to A.

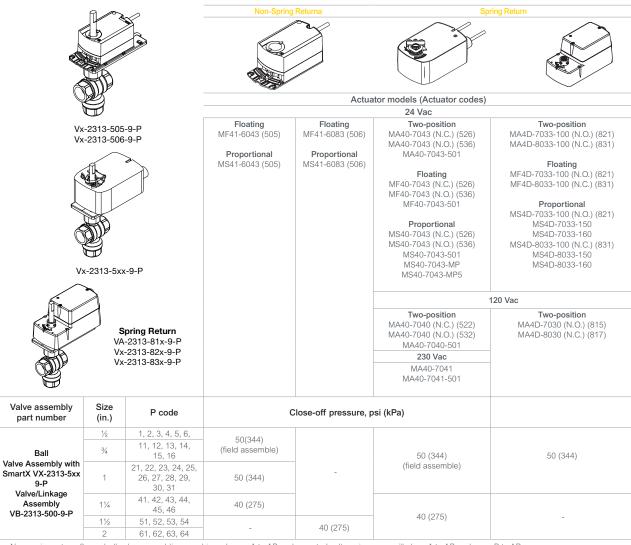

- a Non-spring return, 3-way ball valve assemblies are shipped open A to AB and a control voltage increase will close A to AB and open B to AB
- b Spring return 3-way valves are normally closed, A to AB and a control voltage increase will close A to AB and open B to AB.
- c To find the corresponding flow coefficients for these port codes, refer to "3-way Ball Valve Assemblies with Sizes, Port Codes and CVS."
- d To determine a specific part number, identify the actuator's Control Signal Type ("A," "F," or "S"), Actuator code, and P code.



VB-2000 SR and NSR SmartX Actuator Specifications

MF/MS41-6043/83 NSR SmartX Ac				
Inputs	Control Signal			
MF41-6043 and MF41-6083 MS41-6043 and MS41-6083	Floating three-position control, 24 Vac Proportional, 0–10 Vdc; input			
Power Requirements	r roportional, 0–10 vde, input			
(see table)				
Connections	All 24 Vac circuits are Class 2 3 ft. (0.9 m) long, 18			
	AWG plenum rated leads			
Motor Type	Synchronous			
Outputs				
Electrical				
Position feedback voltage for MS41-6043/6083	0-10 Vdc. 1 mA			
101 1004 1-0043/0003	0-10 vac, 1 ma			
Timing: 90°				
Timing in Sec.	At 60 Hz At 50 Hz			
MF41-6043 and MS41-6043	90 108 125 150			
MF41-6043 and MS41-6083				
Outputs Electrical	44 lb-in. (5 N-m) for Mx41-6043 88 lb-in/ (10 N-m) fpr Mx41-6083			
Output torque rating	Normal angle of rotation is			
	limited to a maximum of 95			
Stroke	Field adjustable to limit travel on either end of			
Position indicator	Stroke			
Position indicator	Adjustable pointer is provided for position indication.			
Output shaft setscrew				
Tightening torque	50-60 lb-in. (6.3-6.8 N-m)			
Environmental				
Temperature limits	40, 700 / 40, 4505)			
Shipping and storage Operating	-40-70C (-40-158F) ambient -32-55C (-25-130F) ambient			
Note: Check the valve operating	-32-330 (-23-1301) ambient			
temperature limit. The minimum				
valve media temperature limit				
-7 C (20 F)	5–95%, RH, non-condensing			
Humidity				
Enclosure rating	IEC IP54 (NEMA Type 3)			
Agency Listings (Actuator)				
	UL-873, Underwriters Laboratories			
UL	0 1 0 1 000 000 000 000			
cUL	Canadian Standards C22.2 No. 24-83			
	Canadian Standards C22.2 No. 24-83 EMC Directive (89/336/EEC) Emissions (EN50081-1)			

B		Power inp	out @ 50/60) Hz
Part Number	Voltage	Running VA	Holding VA	Watts
MF41-6043 and MF41-6083	24 Vac –	2.3	-	2.0
M41-6043 and MS41-6083	20/-15%	3.3	1.2	3.0

Specifications	_
Mx40-704x SR SmartX Actuator Inputs	rs .
MA40-7043 MS40-7043	ON/OFF SPST control contacts or Triacs (500 mA rated Proportional 0–10 Vdc or 4–20 mA D C with 50
MS40-7043 MP/MP5 MF40-7043	ohm resisto Proportional 6–9 Vd Floating point control, 24 Va
Power Requirements (see table)	
Connections MA40-704x and MA40- 704x-501	All 24 Vac circuits are Class
MF40-7043 and MA40- 7043-501,	3 ft. (0.9 m) long, appliance cabl for M20 Metric condu
MS40-7043 and MS40- 7043-501	use AM-756 adapto
Motor Type MA40-704x MF40-7043, MS40-7043	Brush Do Brushless Do
Outputs Electrical	
Mx40-7043-501 and MS40-	One auxiliary switch available. SPDT 6 A resistiv @ 24 Vac, adjustable 0 to 95 (o to 1 scale). Switch
7043-501	meets VDE requirements for 6 (1.5) A, 24 Va
MA40-7040-501	One auxiliary switch available. SPDT 6 A resistiv @ 250 Vac, adjustable 0 to 95 (0 to 1 scale). Switc meets VDE requirements for 6 (1.5) A, 250 Vac
Position feedback voltage	For 2–10 Vdc proportional actuators, the feedbac signal is the same voltage range as the input sig- nal. The feedback signal is the same voltage rang as the input signal. The feedback signal can sup- ply up to 0.5 mA to operate up to four additions slave actuators (proportional (MS) models only
Control mode	Switch provided for selection of direct acting or reverse acting control mode on proportional model
Timing MA40-704x MF40 and MS40-7043	Approximately 50 sec Approximately 130 sec
Auxiliary Power Supply MS40-7043-MP and MS40-7043	+20 Vdc @ 25mA (max
Position indicator	Visual scale numbered from 0–90, provided for position indication
Mechanical Stroke Output torque rating	Angle of rotation is limited to a maximum of 95 with mechanical sto
Mx40-704x Environmental	35 lb-in. (4 N-m
Temperature limits Shipping and storage Operating Note: Check the valve	-40-71C (-40-160F) ambier -30-60C (-22-140F) ambier
operating temperature limit. The minimum valve media temperature limit -7 C (20 F) Humidity	5–95%, RH, non-condensin
Enclosure rating	IEC IP54 (NEMA 2, UL Type 2
Agency Listings (Actuator) UL	UL-873, Underwriters Laboratorie (File #9429 Category Temperature-Indicating an Regulating Equipmen
cUL	Canadian Standards C22.2 No. 24-93
European Community	EMC Directive (89/336 EEC Low Voltage Directive (72/23/EEC
Australia	This product meets requirements to bear the RSI according to the terms specified by the Commun cations Authority under the Radio communication



VB-2000 SR and NSR SmartX Actuator Specifications

Mx4D-7033/8033-xxx SmartX Actuators

Inputs

Control Signal and Power Requirements (see table)

a. 4 to 20 mAdc with field-installed 500 W resistor.

Connections

Mx4D-703x-1x0 and Mx4D-803x

1x0 10 ft. (3.05 m) long, plenum cable $\frac{1}{2}$ " (13 mm) conduit connector. For M20 Metric conduit, use AM-756 adaptor

Motor type Brush DC

Outputs

Electrical, Timing, Approximate Timing in Sec. @ 70 °F (21 °C)

David Name Is a m	D	Spring return		
Part Number	Powered	CCWb	CWb	
MA4D-7033-100	56	26	-	
MF4D-7033-100	85	21	-	
MS4D-7033-100	85	21	-	
MA4D-8033-100	56	-	26	
MF4D-8033-100	85	-	21	
MS4D-8033-1x0	85	_	21	

Position feedback voltage: For 0–3 Vdc, 0–9 Vdc, 2–10Vdc and 0–10Vdc proportional actuators, the feedback signal is the same voltage range as the input signal. The 4–20 mA proportional actuators and floating actuators have 2–10 Vdc feedback signal. The feedback signal can supply up to 0.5 mA to operate up to four additional slave actuators.

Mechanical

Stroke Manual override

Output torque rating
RA/DA Jumper

(Proportional Models) Position indicator 93 nominal Allows positioning of valve shaft, using a manual crank

30 lb-in (3.4 N-m)

Permits selection of reverse acting or direct acting control

Visual indicator

Environmental

Temperature Limits Shipping and storage

Operating

NOTE: Check the valve operating temperature limit. The minimum valve media temperature limit is 20 °F (6.7

°C)

Humidity
Enclosure Rating

-22-140 °F (-30-60 °C) ambient

15 to 95% RH, non-condensing

Enclosure is air plenum rated.

-40-160 °F (-40 -71 °C) ambient

NEMA 1. NEMA 2, UL Type 2 (IEC IP54) with customer-supplied watertight conduit connectors.

Agency Listings (Actuator)

UĽ

UL 873, Underwriters Laboratories

File #9429 Category Temperature- Indicating and Regulating Equipment Plenum rated

cUL

Canadian Standards C22.2 No. 24-93

European Community

EMC Directive (89/336/EEC) Low voltage directive (73/23/EEC). This product fits into Installation Category (Overvoltage category)

Australia

Il per EN 61010-1. This product meets requirements to bear the RCM mark according to the terms specified by the Communications Authority under the Radio communications Act 1992



VB-2000 SR and NSR SmartX Actuator Specifications


				Running				Holding (Hz)	
Part Number	Voltage 50/60 Hz	Voltage Vdc	50	50 Hz		60 Hz		60	
			VA	W	VA	W	W	W	
MA40-7043									
MA40-7043-501		24 Vac +	4.4	2.9	4.4	2.9	0.8	0.8	
MS40-7043	24 Vac ± 22–30								
MS40-7043-501			5.6	4.2	5.6	4.2	2.4	2.4	
MF40-7043									
MF40-7043-501			5.9	4.4	5.9	4.4	2.9	2.9	
MS40-7043-MP*									
MS40-7043- MP5*			6.9	5.0	6.6	5.0	3.2	3.2	
MA40-7040*	120 Vac								
MA40-7040-501*	± 10%	_	6.4	3.8	4.3	3.4	1.6	1.2	
MA40-7041		1						1.2	
MA40-7041-501	230 Vac		5.8	4.1	4.6	3.9	1.5		

			Actuator power input					
Don't November	Part Number Control signal	Valtaria		Running				
Part Number	Control signal	Voltage	50/	60 Hz	DO 4	50/60 Hz		
			VA	VA W	DC Amps	W		
MA4D-x033-100	2 position		5.1	3.6	0.14	1.3		
MF4D-x033-100	Floating		6.8	4.2	0.15	1.9		
MS4D-x033-100	2 to 10 Vdca Proportional	24 Vac + 20% or 20 to 30 Vdc						
MS4D-x033-150	0 to 10 Vdc Proportional		6.1	3.4	0.12	1.4		
MS4D-x033-160	4 to 20 mAdc Proportional							


VB-2000 2-Way Ball Valve Assembly Dimensions (44/88 lb-in.)

Volum Assembly Dout Number	Valve Size in.	50.10	Valve Dimensions in inches (mm) Refer to Figure 1				
Valve Assembly Part Number	valve Size in.	P Code ^a	Α	В	С	D	
		1, 2, 3, 4, 5, 7	2-3/8 (60)	7 (178)	81/4 (210)	3-1/8 (79)	
	1/2	6	2-5/8 (67)	7 (178)	8½ (216)	3-3/8 (86)	
	3/4	11, 12, 13, 14, 15, 17	2-7/16 (62)	7 (178)	81/4 (210)	3¼ (83)	
	74	16, 18	2¾ (70)	7 (178)	8½ (216)	3-3/8 (86)	
		21, 23	3-1/16 (78)	7 (178)	8-7/8 (225)	3-5/8 (92)	
		22, 25	2¾ (70)	7 (178)	8½ (216)	3-3/8 (86)	
2-Way	1	24, 26	4½ (114)	7-3/8 (187)	9-3/8 (238)	3-7/8 (98)	
VF-22x3-505-9-P VF-22x3-506-9-P		27	3 (76)	7 (178)	8-7/8 (225)	3-5/8 (92)	
VS-22x3-505-9-P		41, 42, 43, 45	3 (76)	7 (178)	8-7/8 (225)	3-5/8 (92)	
VS-22x3-506-9-P	11/4	44, 46	3-5/8 (92)	7-1/8 (181)	9-3/8 (238)	3-¾ (95)	
		51, 53	3-7/16 (87)	7-1/8 (181)	9-3/8 (238)	3-¾ (95)	
	1½	52, 54	4-1/16 (103)	7¼ (184)	9-7/8 (251)	4-1/16 (103	
		61, 65	3-15/16 (100)	7¼ (184)	9-7/8 (251)	4 (102)	
	2	63, 66, 67	4-15/16 (125)	7-¾ (197)	10½ (267)	4-7/16 (113	
	21/2	71, 72, 76, 73, 74, 75	5-3/8 (137)	8 (203)	10-¾ (273)	4½ (114)	
	3	82, 85	5-11/16 (144)	8-1/8 (206)	10-11/16 (271)	41/4 (108)	

a - To find the corresponding flow coefficients for these port codes, refer to "2-Way Ball Valve Assemblies with Sizes, Port Codes, and Cvs."







VB-2000 3-Way Ball Valve Assembly Dimensions (44/88 lb-in.)

alve Assembly Part Number	Valve Size in.	P Code ^a		Valve Dimen	sions in inches (mm) Refe	er to Figure 2	
aive Assembly Part Number	valve Size III.	P Code ^a	Α	В	С	D	Е
	1/2	1, 2, 3, 4, 5, 6	2-5/8 (67)	7 (178)	9-¾ (248)	3-5/16 (84)	2 (51)
	3/4	11, 12, 13, 14, 15, 16	2¾ (70)	7 (178)	9-¾ (248)	3¼ (83)	2 (51)
		21, 22, 23, 24, 25, 28	2¾ (70)	7 (178)	9-13/16 (249)	31/4 (83)	2-1/8 (54)
	1	27, 30	4¼ (108)	7-3/8 (187)	11-5/8 (295)	3-5/8 (92)	3-1/16 (78
3-Way VF-2313-505-9-P		26, 29, 31	4¼ (108)	7½ (191)	11½ (292)	3½ (89)	3-1/8 (79)
VF-2313-506-9-P VS-2313-505-9-P		45	3 (76)	7 (178)	10-5/8 (270)	3-5/8 (92)	2-3/8 (60)
VS-2313-506-9-P	11/4	41, 43, 44, 46	3-5/8 (92)	7-1/8 (181)	10-7/8 (276)	3½ (89)	2¾ (70)
		51, 52, 53, 55	3-5/8 (92)	7-1/8 (181)	10-7/8 (276)	3-5/8 (92)	2¾ (70)
	1½	54	4 (102)	7¼ (184)	11-¾ (298)	4 (102)	3¼ (83)
		56	4 (102)	7-¾ (197)	11-¾ (298)	4 (102)	31/4 (83)
		61, 63	3-15/16 (100)	7¼ (184)	11-¾ (298)	3-7/8 (98)	3-1/16 (78)
	2	62, 64	4-7/8 (124)	7-¾ (197)	12-11/16 (322)	4½ (114)	3-7/8 (98)

a - To find the corresponding flow coefficients for these port codes, refer to "3-Way Ball Valve Assemblies with Sizes, Port Codes, and Cvs"






Figure 2. Mx41-6043 or Mx41-6083 with 3-Way Ball Valve.




VB-2000 2-Way Ball Valve Assembly Dimensions (35 lb-in.)

aliva Aaaamalaliv Dant Nivoshan	Valve Size in.			Valve D	imensions in inches (n	nm) Refer to Figure 2	
/alve Assembly Part Number	valve Size in.	P Code ^a	Α	В	С	D	Е
	1/2	1, 2, 3, 4, 5, 6	2-5/8 (67)	7 (178)	9-¾ (248)	3-5/16 (84)	2 (51)
	3/4	11, 12, 13, 14, 15, 16	2¾ (70)	7 (178)	9-¾ (248)	31/4 (83)	2 (51)
	1	21, 22, 23, 24, 25, 28	2¾ (70)	7 (178)	9-13/16 (249)	31/4 (83)	2-1/8 (54)
		27, 30	4¼ (108)	7-3/8 (187)	11-5/8 (295)	3-5/8 (92)	3-1/16 (78)
3-Way VF-2313-505-9-P		26, 29, 31	4¼ (108)	7½ (191)	11½ (292)	3½ (89)	3-1/8 (79)
VF-2313-506-9-P VS-2313-505-9-P		45	3 (76)	7 (178)	10-5/8 (270)	3-5/8 (92)	2-3/8 (60)
VS-2313-506-9-P	11/4	41, 43, 44, 46	3-5/8 (92)	7-1/8 (181)	10-7/8 (276)	3½ (89)	2¾ (70)
		51, 52, 53, 55	3-5/8 (92)	7-1/8 (181)	10-7/8 (276)	3-5/8 (92)	2¾ (70)
	1½	54	4 (102)	7¼ (184)	11-¾ (298)	4 (102)	3¼ (83)
		56	4 (102)	7-¾ (197)	11-¾ (298)	4 (102)	3¼ (83)
		61, 63	3-15/16 (100)	7¼ (184)	11-¾ (298)	3-7/8 (98)	3-1/16 (78)
	2	62, 64	4-7/8 (124)	7-¾ (197)	12-11/16 (322)	4½ (114)	3-7/8 (98)

a - To find the corresponding flow coefficients for these port codes, refer to "3-Way Ball Valve Assemblies with Sizes, Port Codes, and Cvs".








VB-2000 3-Way Ball Valve Assembly Dimensions (35 lb-in.)


Valve Assembly Part	Maless Olassia	D 0 - 4 - 1	Valve Dimensions in inches (mm) Refer to Figure 4					
Number	Valve Size in.	P Code ^a	Α	В	С	D	E	
	1/2	1, 2, 3, 4, 5, 6	2-5/8 (67)	7-3/8 (187)	9-¾ (248)	3-5/16 (84)	2 (51)	
	3/4	11, 12, 13, 14, 15, 16	2¾ (70)	7-3/8 (187)	9-¾ (248)	31/4 (83)	2 (51)	
	1	21, 22, 23, 24, 25, 28	2¾ (70)	7-3/8 (187)	9-13/16 (249)	31/4 (83)	2-1/8 (54	
3-Way		27, 30	4¼ (108)	8 (203)	11-5/8 (295)	3-5/8 (92)	3-1/16 (78	
VA-2313-526-9-P VA-2313-536-9-P		26, 29, 31	4¼ (108)	8-1/8 (206)	11½ (292)	3½ (89)	3-1/8 (79)	
VF-2313-526-9-P VF-2313-536-9-P		45	3 (76)	7-3/8 (187)	10-5/8 (270)	3-5/8 (92)	2-3/8 (60)	
VS-2313-526-9-P	11/4	41, 43, 44, 46	3-5/8 (92)	7-¾ (197)	10-7/8 (276)	3½ (89)	2¾ (70)	
VS-2313-536-9-P		51, 52, 53, 55	3-5/8 (92)	7-¾ (197)	10-7/8 (276)	3-5/8 (92)	2¾ (70)	
	1½	54	4 (102)	7-7/8 (200)	11-¾ (298)	4 (102)	3¼ (83)	
	.,,	56	4 (102)	8-3/8 (213)	11-¾ (298)	4 (102)	31/4 (83)	
		61, 63	3-15/16 (100)	7-7/8 (200)	11-¾ (298)	3-7/8 (98)	3-1/16 (78	


8-3/8 (213)

4-7/8 (124)

62, 64







12-11/16 (322)

4½ (114)

3-7/8 (98)

a - To find the corresponding flow coefficients for these port codes, refer to "3-Way Ball Valve Assemblies with Sizes, Port Codes, and Cvs"

VB-2000 2-Way Ball Valve Assembly Dimensions (30 lb-in.)

/alica A a a such his Doub Normalian	Value Cierrie		Valve Dimensions in inches (mm) Refer to Figure 5			
/alve Assembly Part Number	Valve Size in.	P Code ^a	Α	В	С	D
		1, 2, 3, 4, 5, 7	2-3/8 (60)	81/4 (210)	81/4 (210)	3-1/8 (79)
	1/2	6	2-5/8 (67)	81/4 (210)	8½ (216)	3-3/8 (86)
2-Way VA-22x3-815-9-P	3/4	11, 12, 13, 14, 15, 17	2-7/16 (62)	8¼ (210)	81/4 (210)	31/4 (83)
VA-22x3-817-9-P VA-22x3-821-9-P	/4	16, 18	2¾ (70)	81/4 (210)	8½ (216)	3-3/8 (86)
VA-22x3-831-9-P		21, 23	3-1/16 (78)	81/4 (210)	8-7/8 (225)	3-5/8 (92)
VF-22x3-821-9-P VF-22x3-831-9-P		22, 25	2¾ (70)	81/4 (210)	8½ (216)	3-3/8 (86)
VS-22x3-821-9-P VS-22x3-831-9-P		24, 26	4½ (114)	8-7/8 (225)	9-3/8 (238)	3-7/8 (98)
	1					
	1	27	3 (76)	81/4 (210)	8-7/8 (225)	3-5/8 (92)

a - To find the corresponding flow coefficients for these port codes, refer to "2-Way Ball Valve Assemblies with Sizes, Port Codes, and Cvs."


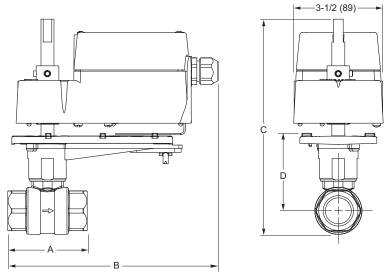


Figure 5. MA4D-7033, MF4D-7033, MS4D-7033, MA4D-8033, MF4D-8033, or MS4D-8033 with 2-Way Ball Valve.

VB-2000 3-Way Ball Valve Assembly Dimensions (30 lb-in.)

Valve Assembly Part	Valve Size in.	P Codeª		Valve Dimen	sions in inches (mm)	Refer to Figure 6		
Number	valve Size III.	P Code ^a	Α	В	С	D	Е	
	1/2	1, 2, 3, 4, 5, 6	2-5/8 (67)	8½ (216)	9-¾ (248)	3-5/16 (84)	2 (51)	
3-Way	3/4	11, 12, 13, 14, 15, 16	2¾ (70)	8½ (216)	9-¾ (248)	31/4 (83)	2 (51)	
VA-2313-815-9-P VA-2313-817-9-P VA-2313-821-9-P		21, 22, 23, 24, 25, 28	2¾ (70)	8½ (216)	9-13/16 (249)	31/4 (83)	2-1/8 (54)	
VA-2313-831-9-P		27, 30	4¼ (108)	8-7/8 (225)	11-5/8 (295)	3-5/8 (92)	3-1/16 (78	
VF-2313-821-9-P VF-2313-831-9-P								
VS-2313-821-9-P VS-2313-831-9-P	1	26, 29, 31	4¼ (108)	9 (229)	11½ (292)	3½ (89)	3-1/8 (79)	

a - To find the corresponding flow coefficients for these port codes, refer to "3-Way Ball Valve Assemblies with Sizes, Port Codes, and Cvs" on page 4.

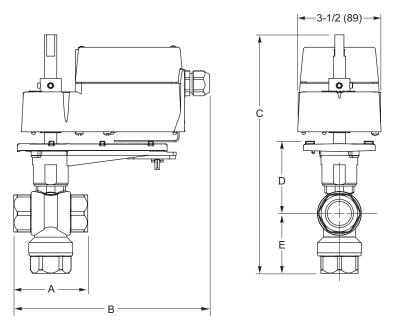

 $Figure\ 6.\ MA4D-7033,\ MF4D-7033,\ MS4D-7033,\ MA4D-8033,\ MF4D-8033,\ or\ MS4D-8033\ with\ 3-Way\ Ball\ Valve.$

Butterfly Valve Assembly Overview and Ordering

Product Description

Schneider Electric's Butterfly Valve line offers a wide range of 2-Way and 3-Way sizes, along with electric non-spring return and spring return actuator models that operate with on/off, floating, or proportional control signals. Models include standard resiliency valve bodies for 2 and 3-Way applications and high performance valve bodies for 2-Way applications that require larger close offs and wider temperature ranges.

All standard resiliency assemblies include industry leading butterfly valve features, stainless steel double "D" shafts, a nylon 11 coated ductile iron disc machined to provide bubble tight shut off, minimum torque, and a longer seat life.

Schneider Electric's High Performance Butterfly Valves are ideally suited to both high pressure, high temperature, high cycle and mission critical HVAC applications. This includes chiller isolation, cooling tower isolation, change-over systems, large air handler's coil control, bypass and process control applications. With ANSI Class 150 rating, all valves are tested for bubble tight close-off to API 598 standards at maximum rated differential pressure.

Applications

Typical applications include data centers, cooling towers, central system shutoff and bypass piping control, thermal storage, and chiller and boiler control.

Features

Standard Valves


- 2 to 20" 2-Way assemblies and 2 to 16" 3-Way assemblies.
- Chilled/hot water/glycol applications.
- Molded in seat: Tightly controlled vulcanization process produces accurate and repeatable dimensions, which leads to consistently lower torque over the valve's lifetime.
- Upper and Lower Stem Bearing: Reduce operating torque and increase reliability in high cycle applications.
- End of Service Rated: Sealing at full rated differential pressure.
- · Precision Engineered Profiled Disc Sealing Edge: Extends the valve life by reducing seat wear.
- · Stainless Steel Double D Stem: Requires no pins or screws to connect the disc and stem.
- Extended neck design for temperature isolation and ease of insulation installation.
- Nylon 11 coated ductile iron and stainless steel disc.
- Reduced torque requirements.
- · High purity peroxide cured EPDM seats.
- · Low torque and superior rubber stability over the shelf life and service life of the valve.
- · Wide choice of electric actuators and control signals.
- Cast iron lug bodies made with ANSI Class 125/150 flanges.
- Bubble-tight shut-off and bidirectional flow.
- NSF-61 certified.

High Performance Valves

- Double Offset Stem/Disc Design: Reduced seat wear, zero leakage, and low torque.
- Blowout Proof Stem: Safety and ease of use.
- Energized RTFE Seat: Zero leakage, self-adjusting for wear and easy field replacement.
- Pressure assisted, no pressure dependent seat design.
- Optimal performance and sealing at high or low differential pressures.
- · Adjustable PTFE Packing: Packing can be adjusted while the valve is in service.
- Dead End Rating Equal to Nominal Pressure Rating: Allows the control valve to function as an isolation valve.

Part Numbering System

Specify fields for the Butterfly Valve assembly part number.

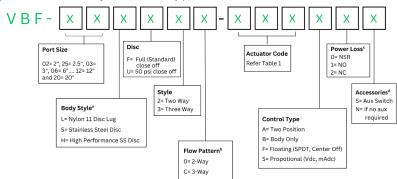



S = Optional Stainless Steel Disc. Currently available from 2"-20", 2-way, 175/150 psi (close off) with E1x - E9x actuators in 120 Vac only. Please reach out to your Schneider Electric representative for more information.

H= High Performance models 2.5"-18" 2-Way only (refer to the section for specific information on High Performance valve series).

b. 3 Way valves are configurable during the order process. When placing an order manually through Customer Care please note the Configuration Number as per the table and when ordering online through iPortal, please select the proper configuration from the drop-downs on the Cart Page.

c. Choose NO/NC while selecting S56/D56 actuators. Available up to 4", 50 psi valves.

d. Accessories: Actuators code E1x to E9x has aux switch as standard offer. Please select S when selecting E1x - E9x actuators. Refer to Table 1 for more information.









Valve Size and Actuators Code Selection Chart

Table 1: 2-Way and 3-Way Valve Assemblies and Actuators Refer to the part numbering system illustration.

		:	2-Way Butte	erfly Valve As	ssemblies			3-Way Butterfly Valve Assemblies					
Size			Direct		SR 120 Vac	NEMA 4 NSR 24 Vac			Direct	NEMA 4 N	ISR 120 Vac	NEMA 4 I	NSR 24 Vac
(inches)	Pressure (PSI)	SmartX SR	Coupled NSR	On/Off 2 Position	Modulating	On/Off 2 Position	Modulating	SmartX SR	Coupled NSR	On/Off 2 Position	Modulating	On/Off 2 Position	Modulating
2"	175	S56	E24	E10	E12	F10	F12	S56	E24	E10	E12	F10	F12
2.5"	175	S56	E24	E10	E12	F10	F12	D56	E25	E10	E12	F10	F12
2.0	285			E10	E12	F10	F12						
3"	175	D56	E25	E10	E12	F10	F12	D56	E25	E10	E12	F10	F12
	285			E10	E12	F10	F12						
	50	D56	E25	E10	E12	F10	F12	D56	E25	E10	E12	F10	F12
4"	175		E26	E10	E12	F10	F12	-	E26	E10	E12	F10	F12
	285			E20	E22	F20	F22	-					
	50		E25	E10	E12	F10	F12	-	E26	E10	E12	F10	F12
5"	175			E10	E12	F10	F12			E20	E22	F20	F22
	285			E30	E32	F40	F42						
	50		E26	E10	E12	F10	F12		E26	E20	E22	F20	F22
6"	175			E20	E22	F20	F22			E20	E22	F20	F22
	285			E30	E32	F40	F42						
	50			E30	E32	F40	F42			E30	E32	F40	F42
8"	175			E30	E32	F40	F42			E40	E42	F40	F42
	285			E40	E42	F40	F42						
	50			E30	E32	F40	F42			E40	E42	F40	F42
10"	175			E40	E42	F40	F42			E50	E52	F60	F62
	285			E50	E52	F60	F62						
	50			E40	E42	F40	F42			E40	E42	F40	F42
12"	175			E50	E52	F60	F62			E60	E62	F60	F62
	285			E60	E62	F60	F62						
	50			E60	E62	F60	F62			E60	E62	F60	F62
14"	150			E60	E62	F60	F62			E70	E72		
	285			E70	E72								
	50			E60	E62	F60	F62			E70	E72		
16"	150			E70	E72					E80	E82		
	285			E80	E82								
	50			E70	E72					E80	E82		
18"	150			E80	E82					E90	E92		
	285			E90	E92								
	50			E80	E82					E90	E92		
20"	150			E90	E92								
	200			E90	E92								



SR = Spring return actuator available as configured for normally open and normally closed butterfly valves.

NSR = Non-spring return actuator.

E1x, E2x, E4x and E6x available as 24 Vac powered: change actuator code E to F and 120 to 24. e.g., E20 to F20, then "S70-24-0081-H"

120 Vac only: E3x, E5x, E5x, E5x, E8x, E9x.

D56 = Dual Actuator. S56 = Single Actuator.

Butterfly Valve Actuators & Assembly Ordering

Table 2: Actuator Codes and Part Numbers^a

Refer to the part numbering system illustration on the previous page.

Actuator Code ^b	On/Off or Floating SR	Actuator Code ^b	Modulating (2–10 Vdc, 4–20mA) SR with the addition of a 500 ohm resistor		
S56	MA41-7153 (On/Off)	S56	MS41-7153		
D56	2 MA41-7153 (On/Off)	D56	2 x MS41-7153 (Modulating)		
S56	MF41-7153 (Floating)	_	_		
D56	2 MF41-7153 (Floating)				
Actuator Code ^b	On/Off or Floating SR with Two SPDT Auxiliary Switches	Actuator Code ^b	Modulating (2–10 Vdc, 4–20 mA) SR with the addition of a 500 ohm resistor with Two Auxiliary Switches		
S56	1 MA41-7153-502 (On/Off)	S56	MS41-7153-502 (Modulated)		
D56	1 MA41-7153 & 1 MA41-7153-502 (On/Off)	D56	1 MS41-7153 & 1 MS41-7153-502 (Modulated)		
S56	1 MF41-7153-502 (Floating)	_	-		
D56	1 MF41-7153 & 1 MF41-7153-502 (Floating)				
Actuator Code ^b	On/Off or Floating NSR	Actuator Code ^b	Modulating (0-10 Vdc, 4-20 mA) NSR		
E24	NR-2216-521	E24	NR-2216-541		
E25	NR-2224-521	E25	NR-2224-541		
E26	2 x NR-2224-521	E26	2 x NR-2224-541		
Actuator Code ^b	On/Off or Floating NSR with Two SPDT Auxiliary Switches	Actuator Code ^b	Modulating (0–10 Vdc, 4–20 mA) NSR with Two SPDT Auxiliary Switches		
E24	NR-2216-522	E24	NR-2216-542		
E25	NR-2224-522	E25	NR-2224-542		
E26	1 NR-2224-521 & 1 NR-2224-522	E26	1 NR-2224-541 & 1 NR-2224-542		
Actuator Code ^c	On/Off NSR with Two SPDT Auxiliary Switches and Heater ^c	Actuator Code ^c	Modulating (0–10 Vdc, 4–20 mA) NSR with Two SPDT Auxiliary Switches and Heaters		
E10	S70-120-0530-H	E12	S71-120-0530-SV		
E20	S70-120-0081-H	E22	S70-120-0081-SV		
E30 (120Vac only)	S70-120-0121-H	E32 (120 vac only)	S70-120-0121-SV		
E40	S70-120-0201-H	E42	S70-120-0201-SV		
E50 (120 Vac only)	S70-120-E301-H	E52 (120 Vac only)	S70-120-E301-SV		
E60 (120 Vac only)	0 (120 Vac only) S70-120-0501-H		S70-120-0501-SV		
E70 (120 Vac only)	S70-120-0651-H	E72 (120 Vac only)	S70-120-0651-SV		
E80 (120 Vac only)	S70-120-1300-H	E82 (120 Vac only)	S70-120-1300-SV		
E90 (120 Vac only)	S70-120-1800-H	E92 (120 Vac only)	S70-120-1800-SV		

S = Single actuators. D = Dual actuators

Change actuator code "E" to "F" for 24 Vac, e.g., E20 to F20, then "S70-24-0081-H"

Table 3: Actuator Types and Features

Actuator Family	Spring Return	Available Input Signals	Available Options
SmartX SR MX41-7153	Yes	24 Vac. Two Position, Floating, 2–10 Vdc, 4–20 mA with the addition of a 500 ohm resistor, Proportional	Auxiliary Switch
Direct Coupled NSR NR-22xx	No	24 Vac. Three Wire Two Position, Floating, 0-10 Vdc, 4-20 mA, Proportional	Auxiliary Switch
NEMA 4 with Hand Wheel NSR-S70-xxx-	No	120 Vac. or 24 Vac. Three Wire Two Position, Floating, 0-10 Vdc, 4-20 mA, Proportional	Auxiliary Switch and Heater included

SmartX SR Actuators for 2" to 4" 2 and 3-Way Valves

Specifications	
Actuator code	S56, D56 (Mx41-7153 Series)
Power Loss Mode	Spring return
Control Signal	On/off, floating, or proprotional
	2 to 10 VDC, 4 to 20 mA with the addition of a 500 ohm resistor
Power Requirements	24 Vac ± 20%,
	22 to 30 VDC, 9.7VA.
Environment	NEMA 2
Ambient Temperatures	−22 to 140 °F (−12 to 60°C)
Agency Listings	UL, CUL, CE
Manual Operator	Provided on single mount units
Option	Auxiliary switches
	7 A @250 Vac
Agency Listings	UL, CUL, CE







Table 4: SmartX SR Actuators for 2"...4" 2 and 3-Way Valves

Model number	Actuator code	Power	Input signal	Feedback	Power loss mode	Optional accessories
MA41-7153			On/Off			
MF41-7153			Floating			_
MS41-7153	S56 or D56 ^b	56 or D56 ^b 24 Vac	2 to 10 VDC	2 to 10 VDC	SR	
MA41-7153-502			On/Off			
MF41-7153-502			Floating	_		Two SPDT Auxiliary
MS41-7153-502			2 to 10 VDC	2 to 10 VDC		switches ^a

a. Note: Models with D56 Actuator code that require the auxiliary switch option will ship with one actuator without switches and one actuator with auxiliary switches. b. D56 = Dual actuators.

NR-22xx NSR Actuators for 2" to 6" 2 and 3-Way Valves

Specifications Actuator code	E24, E25, E26 (NR-2000 Series)
Power Loss Mode	NSF
Control Signal	On/off, floating, or 2 to 10 VDC, 4 to 20 mA.
Power Requirements	20 to 30 Vac, 24 VDC \pm 10% NR-2216 6.5VA, NR-2224 7.5VA
Environment	NEMA 2
Ambient Temperatures	−4 to 122 °F (−2 to 50°C)
Agency Listings	UL, CSA, CE
Optional Auxiliary Switch	2 SPDT 24 Vac 1.5 A inductive, 3 A resistive, 35 VA per switch
Manual Operator	Provided on all models



Non-Spring Return NR-22xx-5xx Actuator

Table 5: NR-22xx NSR Actuators for 2"...6" 2 and 3-Way Valves

Model number	Actuator code	Power	Input signal	Feedback	Power loss mode	Optional accessories
NR-2216-521			On/off, floating			_
NR-2216-522	F04			-		Two SPDT Auxiliary switches
NR-2216-541	E24		0 to 10 VDC,	0 +- 40 \/D0		_
NR-2216-542			4 to 20 mA	0 to 10 VDC		Two SPDT Auxiliary switches
NR-2224-521		24 Vac	0 / 55 50 11		NSR	_
NR-2224-522			On/off, floating	_		Two SPDT Auxiliary switches ^a
NR-2224-541	E25 or E26		0 to 10 VDC.			_
NR-2224-542			4 to 20 mA	0 to 10 VDC		Two SPDT Auxiliary switches

a - Optional. Note: Models with E26 Actuator code that require the auxiliary switch option will ship with one actuator without switches and one actuator with auxiliary switches. E26= Dual actuator NSR = Non-Spring Return.

c. SR = Spring Return.

S70 and S71 NSR Actuators for 2"...20" 2-Way & 2"...16" 3-Way Valves

Specifications	
Actuator Code	71 and 70 Series
Power Loss Mode	Non-spring return
Control Signal	-40 to 500°F
Actuator Code	Ex0 (120 Vac) or Fx0 (24 Vac) On/off, floating
	Ex2 (120 Vac) or Fx2 (24 Vac)
Factory configured for	420 mA with a 250 W
Input Impedance, field configurable for	010 Vdc or 210 Vdc
Power Requirements E1x/F1x, E2x/F2x E3x, E4x/F4x, E5x E6x/F6x, E7x, E8x, E9x	120 Vac or 24 Vac, 50/60 Hz 1.5° 2.1° 3.1°
Environment	NEMA 4
Ambient Temperatures	-40150°F (-4060°C)
Regulatory Compliance	c-UL-us LISTED mark and CE mark
Standard Auxiliary Switch	(Included) 10 A resistive at 125/250 Vac 1/2 A at 125 Vdc
Heater	15W
Manual Operator with Disconnect	Declutchable hand wheel
Agency Listings	UL, CSA, CE Note: 24 Vac (Fxx) models are Half Wave devices, see F-26363



Table 6: NSR Actuators NEMA 4 for 2"...20" 2-Way and 2"...16" 3-Way Valves

Model Number	Actuator Code	Powera	Input Signal	Feedback	Power Loss Mode	Optional Accessories
S71-120-0530-H	E10					
S70-120-0081-H	E20					
S70-120-0121-H	E30 (120 Vac only)					
S70-120-0201-H	E40					Two SPDT Auxiliary Switches
S70-120-E301-H	E50 (120 Vac only)	E=120 Vac F=24 Vac	On/off, floating	-	NSR	and Heater
S70-120-0501-H	E60					(standard)
S70-120-0651-H	E70 (120 Vac Only)					
S70-120-1300-H	E80 (120 Vac Only)					
S70-120-1800-H	E90 (120 Vac Only)					

Model Number	Actuator Code	Power ^a	Input Signal	Feedback	Power Loss Mode	Optional Accessories
S70-120-0530-SV	E12					
S70-120-0081-SV	E22					
S70-120-0121-SV	E32 (120 Vac only)					
S70-120-0201-SV	E42					Tue CDDT Auvilian Cuitaba
S70-120-E301-SV	E52 (120 Vac only)	E=120 Vac F=24 Vac	010 Vdc, 420 mA	010 Vdc, 420 mA	NSR	Two SPDT Auxiliary Switches and Heater
S70-120-0501-SV	E62					(standard)
S70-120-0651-SV	E72 (120 Vac Only)					
S70-120-1300-SVH	E82 (120 Vac Only)					
S70-120-1800-SVH	E92 (120 Vac Only)					

For 24 Vac valve assemblies, use code F in place of E in the numbering table. E10 becomes F10 for 24 Vac powered. (F10 actuator code=S71-24-0530-H).

2-Way Valve Assemblies

2-Way Butterfly Valve Assemblies (2"...4") with NEMA 2 SR, NO and NC Actuators



Flow Type		Equal % bidirectional
	Body	Polyester coated cast iron, ASTM A126
		Class B lug, Mates with ANSI 125/150 flanges.
	Seat	EPDM
Material	Stem	Stainless steel double D stem
	Stem Seals	Self adjusting double U cup
	Disc	Ductile iron nylon 11 coated disc
Fluid Tem	peratures	-40250°F (-40121°C)
Close-Off	Rating	ANSI VI Bubble tight
Applicatio	n	Chilled or hot water up to 60% glycol


Table 7: 2-Way 2"...4" Valve Assemblies with NEMA 2 SR SmartX Actuators


On/Off	Floating	Floating Proportional		Valve size	Close Off Pressure	cv
			(Vac)	(inches)	PSI (kPa)	(Kvs) @ 90°
VBF-02LF20-S56AXY	VBF-02LF20-S56FXY	VBF-02LF20-S56SXY		2"	175	87
VBF-25LF20-S56AXY	VBF-25LF20-S56FXY	VBF-25LF20-S56SXY		2.5"	175	185
VBF-03LF20-D56AXY	VBF-03LF20-D56FXY	VBF-03LF20-D56SXY	24 Vac	3"	175	360
VBF-04LU20-D56AXY	VBF-04LU20-D56FXY	VBF-04LU20-D56SXY		4"	50	740

Replace X with 1 for NO and 2 for NC versions.

Replace Y with N for no auxiliary and S for optional two SPDT auxiliary switch models.

2"...4" Valve Assembly Dimensions with SR Actuators






DUAL MOUNT (D56)

Table 8: 2-Way SR

Valve Assembly	Valve										
Part Number	Size (in.)	Α	В	С	D	E	F	G	Н	К	L
/BF-02LF20-S56AXY	2"	3.7 (94)	1.7 (43)	2.0 (51)	2.3 (58)	5.5 (140)	6.00 (152)	_	4.00 (102)	12.5 (318)	(4) - 5/8"-11
/BF-25LF20-S56AXY	2.5"	4.3 (106)	1.8 (46)	2.5 (64)	2.6 (65)	6.0 (152)	6.00 (152)	_	4.00 (102)	12.5 (318)	(4) - 5/8"-11
/BF-03LF20-D56AXY	3"	4.9 (124)	1.8 (46)	3.0 (76)	2.8 (71)	6.3 (159)	11.75 (298)	19.00 (483)	4.00 (102)	_	(4) - 5/8"-11
VBF-04LU20-D56AXY	4"	6.1 (154)	2.1 (52)	4.1 (103)	4.1 (104)	7.0 (178)	11.75 (298)	19.00 (483)	4.00 (102)	_	(8) - 5/8"-11

2-Way Butterfly Valve Assemblies (2"...6") with NSR NEMA 2 Actuators



Flow Type		Equal % bidirectional
	Body	Polyester coated cast iron, ASTM A126
		Class B lug, Mates with ANSI 125/150 flanges
	Seat	EPDM
Material		
	Stem	Stainless steel double D stem
	Stem Seals	Self adjusting double U cup
	Disc	Ductile iron nylon 11 coated disc
Fluid Temp	eratures	-40 to 250°F (-40 to 121°C)
Close-Off I	Rating	ANSI VI Bubble tight
Application	1	Chilled or hot water up to 60% glycol

Table 9: 2-Way 2"....6" Valve Assemblies with NEMA 2 NSR Actuators

Model	Number	Power	Valve Size	Close Off Pressure (PSI)	CVs @90°	
On/Off or Floating	On/Off or Floating Proportional		(inches)	,	C	
VBF-02LF20-E24F0Y	VBF-02LF20-E24S0Y		2"	175	87	
VBF-25LF20-E24F0Y	VBF-25LF20-E24S0Y		2.5"	175	185	
VBF-03LF20-E25F0Y	VBF-03LF20-E25S0Y	24 Vac	3"	175	360	
VBF-04LF20-E26F0Y	VBF-04LF20-E26S0Y		4"	175	740	
VBF-04LU20-E25F0Y	VBF-04LU20-E25S0Y		4"	50	740	
VBF-05LU20-E25F0Y	VBF-04LU20-E25S0Y		5"	50	1218	
VBF-06LU20-E26F0Y	VBF-06LU20-E26S0Y		6"	50	1900	

Replace Y with N for No Auxiliary and S for Optional two SPDT auxiliary switch models.

2"...6" Valve Assembly Dimensions With NSR Actuators

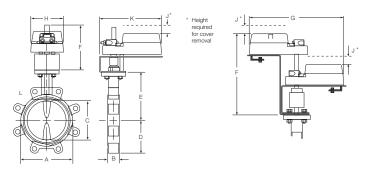


Table 10: 2-Way NSR SINGLE MOUNT DUAL MOUNT

Valve Assembly	Valve				Dime	nsions in in	ches (mill	imetres)				
Part Number	Size (in inches)	Α	В	С	D	Е	F	G	Н	J	К	L Lug Bolt Threads
VBF-02LF20-E24F0Y	2"	3.7 (94)	1.7 (43)	2.0 (51)	2.3 (58)	5.5 (140)	6.00 (152)	_	4.00 (102)	2.00 (51)	7.50 (191)	(4) -5/8"-11
VBF-25LF20-E24F0Y	2.5"	4.3 (106)	1.8 (46)	2.5 (64)	2.6 (65)	6.0 (152)	6.00 (152)	_	4.00 (102)	2.00 (51)	7.50 (191)	(4)- 5/8"-11
VBF-03LF20-E25F0Y	3"	4.9 (124)	1.8 (46)	3.0 (76)	2.8 (71)	6.3 (159)	6.00 (152)	_	4.00 (102)	2.00 (51)	7.50 (191)	(4)- 5/8"-11
VBF-04LF20-E26F0Y	4"	6.1 (154)	2.1 (52)	4.1 (102)	4.1 (104)	7.0 (179)	11.75 (298)	16.00 (404)	5.00 (127)	2.00 (51)	_	(8) -5/8"-11
VBF-04UF20-E25F0Y	4"	6.1 (154)	2.1 (52)	4.1 (102)	4.1 (104)	7.0 (179)	6.00 (152)	_	4.00 (102)	2.00 (51)	7.50 (191)	(8) -5/8"-11
VBF-05LU20-E25F0Y	5"	7.1 (179)	2.2 (56)	5.0 (127)	4.6 (117)	7.5 (190)	6.00 (152)	_	4.00 (102)	2.00 (51)	7.50 (191)	(8)- 3/4"-10
VBF-06LU20-E26F0Y	6"	8.1 (206)	2.2 (56)	5.8 (146)	5.1 (129)	8.0 (203)	11.75 (298)	16.00 (404)	5.00 (127)	2.00 (51)	_	(8) -3/4"-10

2-Way Butterfly Valve Assemblies (2"...20") with NSR NEMA 4 Actuators



Flow Type		Equal % bidirectional
	Body	Polyester coated cast iron, ASTM A126
		Class B lug, Mates with ANSI 125/150 flanges
	Seat	EPDM
Material	Stem	Stainless steel double D stem
	Stem Seals	Self adjusting double U cup
	Disc	Ductile iron nylon 11 coated or Stainless steel disc
Fluid Temp	eratures	-40250°F (-40121°C)
Close-Off	Rating	ANSI VI Bubble tight
Application	1	Chilled or hot water up to 60% glycol

Table 11: 2-Way Butterfly Valve Assemblies with Series NSR Actuator NEMA 4, Hand Wheel with Two SPDT Auxiliary Switches and Heater

Model N	Number	Power	Valve Size (inches)	Close Off Pressure	CVs @90
On/Off	Modulating			(PSI)	
VBF-04LU20-F10A0S	VBF-04LU20-F12S0S		4"	50	740
VBF-05LU20-F10A0S	VBF-05LU20-F12S0S		5"	50	1218
VBF-06LU20-F10A0S	VBF-06LU20-F12S0S		6"	50	1900
VBF-08LU20-F40A0S	VBF-08LU20-F42S0S		8"	50	3765
VBF-10LU20-F40A0S	VBF-10LU20-F42S0S	24 Vac	10"	50	6661
VBF-12LU20-F40A0S	VBF-12LU20-F42S0S		12"	50	10066
VBF-14LU20-F60A0S	VBF-14LU20-F62S0S		14"	50	11598
VBF-16LU20-F60A0S	VBF-16LU20-F62S0S		16"	50	15395

Model	Number	Power	Valve Size (inches)	Close Off Pressure (PSI)	CVs @90°
On/Off	Modulating				
VBF-04LU20-E10A0S	VBF-04LU20-E12S0S		4"	50	740
VBF-05LU20-E10A0S	VBF-05LU20-E12S0S		5"	50	1218
VBF-06LU20-E10A0S	VBF-06LU20-E12S0S		6"	50	1900
VBF-08LU20-E30A0S	VBF-08LU20-E32S0S		8"	50	3765
VBF-10LU20-E30A0S	VBF-10LU20-E32S0S		10"	50	6661
VBF-12LU20-E40A0S	VBF-12LU20-E42S0S	120 Vac	12"	50	10066
VBF-14LU20-E60A0S	VBF-14LU20-E62S0S		14"	50	11598
VBF-16LU20-E60A0S	VBF-16LU20-E62S0S		16"	50	15395
VBF-18LU20-E70A0S	VBF-18LU20-E72S0S		18"	50	20120
VBF-20LU20-E80A0S	VBF-20LU20-E82S0S		20"	50	25329

Model	Number	Power	Valve Size (inches)	Close Off Pressure (PSI)	CVs @ 90°
On/Off	Modulating				
VBF-02LF20-F10A0S	VBF-02LF20-F12S0S		2"	175	87
VBF-25LF20-F10A0S	VBF-25LF20-F12S0S		2.5"	175	185
VBF-03LF20-F10A0S	VBF-03LF20-F12S0S		3"	175	360
VBF-04LF20-F10A0S	VBF-04LF20-F12S0S		4"	175	740
VBF-05LF20-F10A0S	VBF-05LF20-F12S0S		5"	175	1218
VBF-06LF20-F20A0S	VBF-06LF20-F22S0S		6"	175	1900
VBF-08LF20-F40A0S	VBF-08LF20-F42S0S	24 Vac	8"	175	3765
VBF-10LF20-F40A0S	VBF-10LF20-F42S0S		10"	175	6661
VBF-12LF20-F60A0S	VBF-12LF20-F62S0S		12"	175	10066
VBF-14LF20-F60A0S	VBF-14LF20-F62S0S		14"	150	11598

Model Number		Power	Valve Size (inches)	Close Off Pressure (PSI)	CVs @90°
On/Off	Modulating				
VBF-02LF20-E10A0S	VBF-02LF20-E12S0S	_	2"	175	87
VBF-25LF20-E10A0S	VBF-25LF20-E12S0S		2.5"	175	185
VBF-03LF20-E10A0S	VBF-03LF20-E12S0S		3"	175	360
VBF-04LF20-E10A0S	VBF-04LF20-E12S0S		4"	175	740
VBF-05LF20-E10A0S	VBF-05LF20-E12S0S	120 Vac	5"	175	1218
VBF-06LF20-E20A0S	VBF-06LF20-E22S0S		6"	175	1900
VBF-08LF20-E30A0S	VBF-08LF20-E32S0S		8"	175	3765
VBF-10LF20-E40A0S	VBF-10LF20-E42S0S		10"	175	6661
VBF-12LF20-E50A0S	VBF-12LF20-E52S0S		12"	175	10066
VBF-14LF20-E60A0S	VBF-14LF20-E62S0S		14"	150	11598
VBF-16LF20-E70A0S	VBF-16LF20-E72S0S		16"	150	15395
VBF-18LF20-E80A0S	VBF-18LF20-E82S0S		18"	150	20120
VBF-20LF20-E90A0S	VBF-20LF20-E92S0S		20"	150	25329


Model Number		Power	Valve Size	Close Off Pressure (PSI)	CVs @ 90°
On/Off	Modulating		(Inches)		
VBF-02SF20-E10A0S	VBF-02SF20-E12S0S	120Vac	2"	175	87
VBF-25SF20-E10A0S	VBF-25SF20-E12S0S		2.5"	175	185
VBF-03SF20-E10A0S	VBF-03SF20-E12S0S		3"	175	360
VBF-04SF20-E10A0S	VBF-04SF20-E12S0S		4"	175	740
VBF-05SF20-E10A0S	VBF-05SF20-E12S0S		5"	175	1218
VBF-06SF20-E20A0S	VBF-06SF20-E22S0S		6"	175	1900
VBF-08SF20-E40A0S	VBF-08SF20-E42S0S		8"	175	3765
VBF-10SF20-E40A0S	VBF-10SF20-E42S0S		10"	175	6661
VBF-12SF20-E50A0S	VBF-12SF20-E52S0S		12"	175	10066
VBF-14SF20-E60A0S	VBF-14SF20-E62S0S		14"	150	11598
VBF-16SF20-E80A0S	VBF-16SF20-E82A0S		16"	150	15395
VBF-18SF20-E80A0S	VBF-18SF20-E82A0S		18"	150	20120
VBF-20SF20-E90A0S	VBF-20SF20-E92A0S		20"	150	25329


E3x, E5x, E7x, E8x and E9x only available in 120 Vac.




Butterfly Valves and Actuators

2"...20" Valve Assembly Dimensions with NSR NEMA 4 Actuators







Side view E10


Table 12: 2"...20" 2-Way Butterfly Valve Assemblies with NSR NEMA 4 Actuator Dimensions

Valve Assembly Part	Valve				Dimension	ons in inches (millimetres)			
Number	Size (in.)	Α	В	С	D	Е	F	G	Н	L
VBF-02LF20-E10A0S	2"	3.7 (94)	1.7 (43)	2.0 (51)	2.3 (58)	5.5 (140)	7.7 (196)	8 (203)	-	(4) - 5/8"-11
VBF-25LF20-E10A0S	2.5"	4.3 (106)	1.8 (46)	2.5 (64)	2.6 (65)	6.0 (152)	7.7 (196)	8 (203)	-	(4) - 5/8"-11
VBF-03LF20-E10A0S	3"	4.9 (124)	1.8 (46)	3.0 (76)	2.8 (71)	6.3 (159)	7.7 (196)	8 (203)	-	(4) - 5/8"-11
VBF-04LF20-E10A0S	4"	6.1 (154)	2.1 (52)	4.1 (103)	4.1 (104)	7.0 (178)	7.7 (196)	8 (203)	-	(8) - 5/8"-11
VBF-05LF20-E10A0S	5"	7.1 (179)	2.2 (56)	5.0 (128)	4.6 (117)	7.5 (191)	7.7 (196)	8 (203)	-	(8) - 3/4"-10
VBF-06LF20-E20A0S	6"	8.1 (206)	2.2 (56)	5.8 (146)	5.1 (129)	8.0 (203)	6.96 (176)	7.5 (191)	5.8 (147)	(8) - 3/4"-10
VBF-08LF20-E30A0S	8"	10.5 (267)	2.4 (60)	7.8 (197)	6.1 (154)	9.5 (241)	7.96 (203)	10.1 (256)	7.8 (198)	(8) - 3/4"-10
VBF-10LF20-E40A0S	10"	12.6 (324)	2.7 (68)	9.8 (249)	7.7 (195)	10.8 (273)	7.96 (203)	10.1 (256)	7.8 (198)	(12) - 7/8-9
VBF-12LF20-E50A0S	12"	14.9 (373)	3.1 (78)	11.8 (299)	9.0 (229)	12.3 (311)	7.96 (203)	10.1(256)	7.8 (198)	(12) - 7/8"-9
VBF-14LF20-E60A0S	14"	17.1 (433)	3.1 (78)	13.3 (337)	9.9 (252)	13.6 (346)	8.56 (218)	12.1 (308)	9.5 (241)	(12) – 1"-8
VBF-16LF20-E70A0S	16"	19.2 (488)	4.0 (102)	15.3 (387)	11.3 (287)	14.8 (375)	8.56 (218)	12.1 (308)	9.5 (241)	(16) – 1"-8
VBF-18LF20-E80A0S	18"	21.1 (536)	4.5 (114)	17.3 (438)	12.2 (309)	16.0 (406)	13.86 (351)	12.1 (308)	9.5 (241)	(16) - 1-1/8-8
VBF-20LF20-E90A0S	20"	23.3 (591)	5.0 (127)	19.3 (489)	14.0 (356)	17.3 (438)	13.86 (351)	12.1 (308)	9.5 (241)	(20) -1"-1/8-8

Butterfly Valves and Actuators

3-Way Valve Assemblies

3-Way Butterfly Valve Assemblies (2"...4") with NEMA 2 SR, NO and NC Actuators



Flow Type		Equal % linear bidirectional
		Mixing or diverting configurations
	Body	Polyester coated cast iron, ASTM A126
		Class B lug, Mates with ANSI 125/150 flanges.
	Seat	EPDM
Material	Stem	Stainless steel double D stem
	Stem Seals	Self adjusting double U cup
	Disc	Ductile iron nylon 11 coated disc
Fluid Temp	peratures	-40250°F (-40121°C)
Close-Off	Rating	ANSI VI Bubble tight
Applicatio	n	Chilled or hot water up to 60% glycol

Table 13: 3-Way 2"...4" Valve Assemblies with NEMA 2 SR SmartX Actuators


	Model Number				Close Off	CVs @ 90°
On/Off	Floating	Proportional		(inches)	Pressure (PSI)	
VBF-02LF3C-S56AXY	VBF-02LF3C-S56FXY	VBF-02LF3C-S56SXY		2"	175	87
VBF-25LF3C-D56AXY	VBF-25LF3C-D56FXY	VBF-25LF3C-D56SXY	24 Vac	2.5"	175	185
VBF-03LF3C-D56AXY	VBF-03LF3C-D56FXY	VBF-03LF3C-D56SXY		3"	175	360
VBF-04LU3C-D56AXY	VBF-04LU3C-D56FXY	VBF-04LU3C-D56SXY		4"	50	740

Replace X with 1 for NO and 2 for NC versions.

Replace Y with N for No Auxiliary and S for Optional two SPDT auxiliary switch models.

Replace C with 1, 2, 3, 4, 5, 6, 7, and 8 = Configurable option at time of ordering in iPortal.

3-Way Butterfly Valve Assemblies (2"...6") with NSR NEMA 2 Actuators



Flow Type		Equal % linear bidirectional
		Mixing or diverting applications
	Body	Polyester coated cast iron, ASTM A126
		Class B lug, Mates with ANSI 125/150 flanges
	Seat	EPDM
Material	Stem	Stainless steel double D stem
	Stem Seals	Self adjusting double U cup
	Disc	Ductile iron nylon 11 coated disc
Fluid Temp	peratures	-40250°F (-40121°C)
Close-Off	Rating	ANSI VI Bubble tight
Applicatio	n	Chilled or hot water up to 60° glycol

Table 14: 3-way 2"...6" Valve Assemblies with NEMA 2 NSR Actuators

Model	Number	Power	Valve size (inches)	Close Off Pressure (PSI)	CVs @ 90°
On/Off Floating	Proportional	rowei	vaive size (iliciles)	Close Oil Flessule (F3I)	CVS @ 30
VBF-02LF3C-E24F0Y	VBF-02LF3C-E24S0Y		2"	175	87
VBF-25LF3C-E25F0Y	VBF-25LF3C-E25S0Y		2.5"	175	185
VBF-03LF3C-E25F0Y	VBF-03LF3C-E25S0Y		3"	175	360
VBF-04LU3C-E25F0Y	VBF-04LU3C-E25S0Y	24 Vac	4"	175	740
VBF-04LF3C-E26F0Y	VBF-04LF3C-E26S0Y		4"	50	740
VBF-05LU3C-E26F0Y	VBF-05LU3C-E26S0Y		5"	50	1218
VBF-06LU3C-E26F0Y	VBF-06LU3C-E26S0Y		5"	50	1900

Replace Y with N for no auxiliary and S for optional two SPDT auxiliary switch models. Replace C with 1, 2, 3, 4, 5, 6, 7, and 8 = Configurable option at time of ordering in iPortal.

3-Way Butterfly Valve Assemblies (2"...16") with NSR NEMA 4 Actuators

Table 15: 3-Way 2"...16" Valve Assemblies with NEMA 4 NSR Actuators

Model I	Number	Power ^(a)	Value Cine (inches)	Class Off Pressure (DCI)	CVs @ 90°
On/Off	Modulating	Power	Valve Size (inches)	Close Off Pressure (PSI)	Cvs @ 90°
VBF-02LF3C-E10A0S	VBF-02LF3C-E12S0S		2"	175	87
VBF-25LF3C-E10A0S	VBF-25LF3C-E12S0S		2.5"	175	185
VBF-03LF3C-E10A0S	VBF-03LF3C-E12S0S		3"	175	360
VBF-04LU3C-E10A0S	VBF-04LU3C-E12S0S		4"	50	740
VBF-04LF3C-E10A0S	VBF-04LF3C-E12S0S		4"	175	740
VBF-05LU3C-E10A0S	VBF-05LU3C-E12S0S		5"	50	1218
VBF-05LF3C-E20A0S	VBF-05LF3C-E22S0S		5"	175	1218
VBF-06LU3C-E20A0S	VBF-06LU3C-E22S0S		6"	50	1900
VBF-06LF3C-E20A0S	VBF-06LF3C-E22S0S		6"	175	1900
VBF-08LU3C-E30A0S	VBF-08LU3C-E32S0S	E = 120 Vac F = 24 Vac	8"	50	3765
VBF-08LF3C-E40A0S	VBF-08LF3C-E42S0S	24 700	8"	175	3765
VBF-10LU3C-E40A0S	VBF-10LU3C-E42S0S		10"	50	6661
VBF-10LF3C-E50A0S	VBF-10LF3C-E52S0S		10"	175	6661
VBF-12LU3C-E40A0S	VBF-12LU3C-E42S0S		12"	50	10066
VBF-12LF3C-E60A0S	VBF-12LF3C-E62S0S		12"	175	10066
VBF-14LU3C-E60A0S	VBF-14LU3C-E62S0S		14"	50	11598
VBF-14LF3C-E70A0S	VBF-14LU3C-E72S0S		14"	150	11598
VBF-16LU3C-E70A0S	VBF-16LU3C-E72S0S		16"	50	15395
VBF-16LF3C-E80A0S	VBF-16LF3C-E82S0S	1	16"	150	15395

a - 120 Vac powered models shown, for 24 Vac models change the letter E to F. Example VBF-02LF3C-F10A0S would be 24 Vac powered. E3x, E5x, E7x, E8x and E9x only available in 120 Vac.
Replace C with 1, 2, 3, 4, 5, 6, 7, and 8 = Configurable option at time of ordering in iPortal.



Butterfly Valves and Actuators

Standard Valve Body Technical Data

Service	Hot and chilled water, up to 60% glycol
	See EN-205 Water System Guidelines F-26080
Fluid Temperature Limits	-40250°F (-40120°C)
Sizes	220" 2-Way models
	216" 3-Way models
Neck	2" extended neck
Flow	Bidirectional
Leakage	Bubble Tight Shut Off

Body	A536 Gr. 65-45-12 High Temperature Polyester Coated
	Ductile Iron
Disc	Nylon 11 Coated
Seat	EPDM (Ethylene Propylene Diene Monomer)
Stem	416 Stainless Steel
Upper & Lower	Steel/Bronze
Stem Bearing	+ PTFE Self-lubricating
Tee	Ductile iron (3-Way valves only

CV Flows Based on Disc Position

Table 16: CV Values^a

Angle of Disc Opening									
Valve Size	10°	20°	30°	40°	50°	60°	70°	80°	90°
2"	1	1	15	29	46	66	73	86	87
2.5"	1	8	26	44	66	98	141	177	185
3"	2	22	43	71	112	171	256	338	360
4"	8	37	78	118	192	310	505	689	740
5"	9	53	98	170	288	470	759	1131	1218
6"	13	86	175	297	479	757	1190	1715	1900
8"	19	121	254	429	754	1247	2096	3376	3765
10"	37	178	365	728	1215	2005	3342	5814	6661
12"	69	240	492	1008	1696	2868	4961	8455	10066
14"	110	287	609	1141	1975	3328	5571	9269	11598
16"	147	421	844	1547	2651	4440	7412	12214	15395
18"	190	470	968	1807	3228	5509	9382	18231	20120
20"	230	675	1341	2455	4210	7056	11803	19637	25329

a - CV x 0.865 = Kvs

CV is defined as the volume of water in US gallon per minute (GPM) that flows through a given restriction or valve opening with a pressure drop of one PSI at room temperature.


Required Tightening Torque Standard Valve

Table 17: Required Tightening Torque

Valve Size	Bolt Size (inches)	Maximum Bolt Torque Requirement (ft-lbs)
2" & 2.5"	5/8 - 11 Thread UNC - 2B	30
3"	5/8 - 11 Thread UNC - 2B	35
4"	5/8 - 11 Thread UNC - 2B	35 - 40
5"	3/4 - 10 Thread UNC - 2B	35 - 45
6"	3/4 - 10 Thread UNC - 2B	35 - 50
8"	3/4 - 10 Thread UNC - 2B	45 - 55
10"	7/8 - 9 Threads UNC - 2B	55 - 75
12"	7/8 - 9 Threads UNC - 2B	65 - 110
14" & 16"	1 - 8 Threads UN - 2B	75 - 120
18" & 20"	1-1/8 - 8 Threads UN - 2B	85 - 130

Installation: Lower the valve into the open pipe work with the disc in the 10° open position. Valves with non-spring actuators are shipped in this position. Once the valve is placed in the pipe work, turn the disc to the full-open position. Gradually remove the flange spreaders (if used). Center the valve body to the flanges, and tighten the bolts hand-tight. Slowly close the valve clockwise to check for adequate disc clearance. Return disc to full-open position and cross tighten all bolts to proper torque specification (see tightening pattern above). Do NOT install with the disc in a fully closed position. This will cause seat distortion. When flange bolts are tightened, rubber will close around disc edge creating excessive torque in initial operation.

BOLT TIGHTENING SEQUENCE (TYPICAL)





High Performance Valve Assemblies

2.5"...18" 2-Way High Performance Valve Assemblies

Product Description

Schneider Electric's High Performance Butterfly Valves are ideally suited to both high pressure, high temperature, high cycle HVAC applications and mission critical HVAC applications. This includes chiller isolation, cooling tower isolation, change-over systems, large air handler's coil control, bypass and process control applications. With ANSI Class 150 rating, all valves are tested for bubble tight close-off to API 598 standards at maximum rated differential pressure.

Features

Double Offset Stem/Disc Design

- Reduced seat wear, zero leakage, and low torque Blow-out Proof Stem
- Safety and ease of use

Energized RTFE Seat

- Zero leakage, self-adjusting for wear and easy field replacement

Pressured Assisted, but not Pressure Dependent Seat Design

Optimal performance and sealing at high or low differential pressures

Adjustable PTFE packing

- Packing can be adjusted while the valve is in service Dead End Rating Equal to Nominal Pressure
- Allows the control valve to function as an isolation valve

High Performance Valve Body Technical Data

Service	Hot Water, Chilled Water
	Condenser Water, Steam
Fluid Temperature Limits	-40500°F
Max Steam Pressure	On/Off 150 PSI
	Proportional 50 PSI
Sizes	2.5"18"
Flow Characteristic	Modified Equal Percentage
Leakage	Bubble tight

Carbon Steel
17-4 Stainless Steel
316 Stainless Steel
RTFE

Table 18: 2-Way High Performance Butterfly Valve Assemblies with NSR NEMA 4 Actuator, Hand Wheel with Two SPDT Auxiliary Switches and Heater

Model	Number	Power	Valve Size	Close Off	CVs @ 90°
On/Off	Modulating		(inches)	Pressure (PSI)	
VBF-25HF20-E10A0S	VBF-25HF20-E12S0S		2.5"		160
VBF-03HF20-E10A0S	VBF-03HF20-E12S0S		3"		185
VBF-04HF20-E20A0S	VBF-04HF20-E22S0S		4"		375
VBF-05HF20-E30A0S	VBF-05HF20-E32S0S		5"		790
VBF-06HF20-E30A0S	VBF-06HF20-E32S0S		6"	285 psi	1350
VBF-08HF20-E40A0S	VBF-08HF20-E42S0S	120 Vac	8"	200 psi	2800
VBF-10HF20-E50A0S	VBF-10HF20-E52S0S		10"		4300
VBF-12HF20-E60A0S	VBF-12HF20-E62S0S		12"		6650
VBF-14HF20-E70A0S	VBF-14HF20-E72S0S		14"		7650
VBF-16HF20-E80A0S	VBF-16HF20-E82S0S		16"		9800
VBF-18HF20-E90A0S	VBF-18HF20-E92S0S		18"		10500

Model	Number	Power	Valve Size	Close Off	CVs @ 90°
On/Off	Modulating		(inches)	Pressure (PSI)	013@30
/BF-25HF20-F10A0S	VBF-25HF20-F12S0S		2.5"		160
VBF-03HF20-F10A0S	VBF-03HF20-F12S0S		3"	- - - 285 psi	185
VBF-04HF20-F20A0S	VBF-04HF20-F22S0S		4"		375
VBF-05HF20-F40A0S	VBF-05HF20-F42S0S	0414	5"		790
VBF-06HF20-F40A0S	VBF-06HF20-F42S0S	24 Vac	6"		1350
VBF-08HF20-F40A0S	VBF-08HF20-F42S0S		8"	1	2800
VBF-10HF20-F60A0S	VBF-10HF20-F62S0S		10"		4300
VBF-12HF20-F60A0S	VBF-12HF20-F62S0S	1	12"		6650

Butterfly Valves and Actuators

Table 19: Cv Values^a

				Disc Positi	on in Degrees				
Valve Size	10°	20°	30°	40°	50°	60°	70°	80°	90°
2.5"	3	8	16	30	50	78	100	136	160
3"	5	14	32	56	87	123	155	178	185
4"	10	31	63	115	175	250	315	365	375
5"	16	41	78	146	238	360	500	675	790
6"	35	81	140	218	330	510	750	1070	1350
8"	65	165	280	456	685	1060	1590	2230	2800
10"	100	250	450	700	1050	1630	2430	3450	4300
12"	155	390	700	1080	1630	2530	3750	5330	6650
14"	175	450	810	1250	1890	2900	4300	6100	7650
16"	230	580	1020	1530	2420	3700	5510	7560	9800
18"	170	500	1180	2220	3520	5100	6960	9100	10500

a. Cv x .865 = Kvs

The best equal percentage flow characteristic is between 20 to 70 degrees of disc opening. Above 70 degrees the flow characteristic is primarily quick opening. Application engineers requiring good equal percentage floating or proportional control should size the valve for the required Cv according to the table, and limit the disc rotation to a maximum of 70 degrees in the field. Various methods can be used to limit the disc rotation including in the controller, electrically at the actuator (for proportional actuators only), or mechanically at the actuator. Two position actuators should not be selected for applications requiring equal percentage flow characteristics.

Required Tightening Torque High Performance

BOLT TIGHTENING SEQUENCE (TYPICAL)




Table 20: High Performance H1 Valve Bodies Required Tightening Torque^a

Valve Size (inches)	Bolts Size / Threads UNC-28	# of Holes	Max Bolt Torque (ft-lbs)
2.5	5/8 -11	4	22
3	5/8 -11	4	30
4	5/8 -11	8	36
5	3/4 -10	8	49
6	3/4 -10	8	62
8	3/4 -10	8	107
10	7/8 - 9	12	110
12	7/8 - 9	12	156
14	1 - 8	12	228
16	1 - 8	16	268
18	1 1/8 - 8	16	400

Installation: Lower the valve into the open pipe work with the disc in the 10° open position. Valves with non-spring actuators are shipped in this position. Once the valve is placed in the pipe work, turn the disc to the full-open position. Gradually remove the flange spreaders (if used). Center the valve body to the flanges, and tighten the bolts hand-tight. Slowly close the valve clockwise to check for adequate disc clearance. Return disc to full-open position and cross tighten all bolts to proper torque specification. Do NOT install with the disc in fully closed position. This will cause seat distortion. When flange bolts are tightened, rubber will close around disc edge creating excessive torque in initial operation.



Cv is defined as the volume of water in US gallons per minute (GPM) that flows through a given restriction or valve opening with a pressure drop of one PSI at room temperature.

2.5"...18" High Performance Valve Assembly Dimensions with NSR NEMA 4 Actuators





Table 21: 2"...18" 2-Way High Performance Butterfly Valve Assemblies with NSR NEMA 4 Actuator Dimensions

Valve Assembly Part No	Valve Size (in	Dimensions in inches (mm)										
Part No	inches)	Α	В	С	D	E	F	G	Н	I (Lug Bolt Threads)		
VBF-25HF20-E10A0S	2.5"	4.75	1.88	2.28	3.81	6.38	5.6	7.5	5.8	5/8-11		
VBF-03HF20-E10A0S	3"	5.25	1.88	2.86	4.09	6.63	5.6	7.5	5.8	5/8-11		
VBF-04HF20-E20A0S	4"	6.72	2.03	3.72	4.71	7.5	5.6	7.5	5.8	5/8-11		
VBF-05HF20-E30A0S	5"	7.62	2.23	4.8	5.07	7.5	6.6	10.1	7.8	3/4-10		
VBF-06HF20-E30A0S	6"	8.62	2.23	5.88	5.57	8	6.6	10.1	7.8	3/4-10		
VBF-08HF20-E40A0S	8"	10.81	2.4	7.8	6.94	9.5	6.6	10.1	7.8	3/4-10		
VBF-10HF20-E50A0S	10"	13.06	2.75	9.78	8.56	10.75	7.2	12.1	9.5	7/8-9		
VBF-12HF20-E60A0S	12"	15.42	3.08	11.74	10.18	12.25	7.2	12.1	9.5	7/8-9		
VBF-14HF20-E70A0S	14"	17.24	3.73	12.9	11.95	14.5	7.2	12.1	9.5	1" -8		
VBF-16HF20-E80A0S	16"	19.5	4.11	14.68	12.94	17.75	12.5	18.8	9.5	1" -8		
VBF-18HF20-E90A0S	18"	21.38	4.61	16.6	14.15	20	12.5	18.8	9.5	1 1/8" -8		

Butterfly Valves and Actuators

3-Way Butterfly Valve Configurations

Spring Return and Non-Spring Return

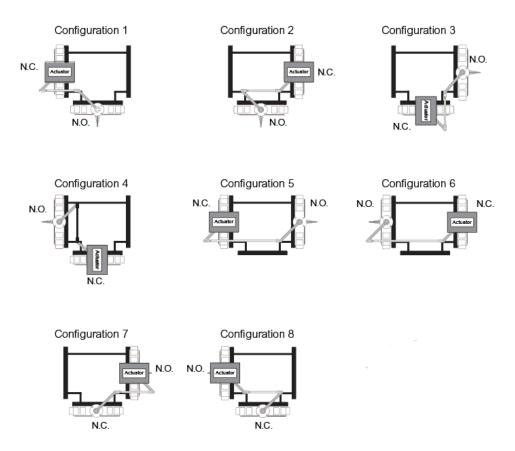

Note: Please select the desired configuration for all 3-Way butterfly valve assembly orders. Schneider Electric must have the specification in order to manufacture the appropriate linkage kit. Please reach out to Customer Care while ordering or choose the right configuration from the dropdown list in your cart when ordering through iPortal.

Spring Return Direct Coupled SmartX Actuators

Value-driven general purpose applications

Mx4D-703x and Mx4D-803x Series

- Two position models controlled by SPST controller
- Floating models controlled by SPDT floating controllers
- Jumper selectable control function direct/reverse action
- · Floating and proportional models automatically adjust input span to match the damper/valve travel

Damp and harsh environment applications

Mx40-717x Series

- · Direct mount to round or square damper shaft
- 150 lb-in (17 N-m) torque rating, overload protection throughout rotation
- Oil immersed gear train provides continuous lubrication
- Automatic current sensing motor control provides extended reliability and repeatable timing
- Provides true mechanical clockwise or counterclockwise spring return operation for reliable positive close-off in airtight applications
- 5-year warranty, NEMA 4 housing (IEC IP56)
- Can be double mounted (gang mounting) to accommodate high torque application requirements to 4 actuators
- MS40-717x models provide position feedback signal

High performance HVAC applications

Mx70-704x Series

- Direct mount to round or square damper shaft
- 35 lb-in (4 N-m) torque rating
- Overload protection throughout rotation
- Optional built-in auxiliary switches
- True mechanical clockwise or counter clockwise spring return operation for reliable, positive close-off in airtight applications
- Visual position indicator
- Direct acting or reverse acting control mode available on proportional models
- Rotation limiting available
- Rugged die-cast housing for NEMA 2/IP54 rating

Mx41-7xx Series

- Direct mount to round or square damper shaft
- 60 lb-in (7 N-m) torque rating
- 133 lb-in (15 N-m) torque rating
- Overload protection throughout rotation
- Operational built-in auxiliary switches
- Provides true mechanical clockwise or counterclockwise spring return operation for reliable positive close-off in airtight applications
- Direct acting or reverse acting control mode available on proportional models
- Rotation limiting available
- Rugged die-cast housing for NEMA 2/IP54 rating
- Manual override

High torque HVAC applications

Mx41-730x Series

- 270 b-in (30 N-m) of torque with mechanical spring return, manual override, and Brushless DC Motor.
- Stall protected throughout rotation and reversible mounting.
- Models for two position 24 Vac/Vdc, and two position 100 230 Vac applications
- Models for 2 10 Vdc input signal applications (field configurable for other input signals) with a
 position feedback signal and direct/reverse acting control mode selection switch on both side.
- Models for auxiliary switch applications.
- Models for NEMA 4 / IP66 outdoor applications.
- 95° of rotation, adjustable with mechanical end stops and graduated position indicator showing 0° to -95°
- Can be double-mounted (gang mounting) to accommodate high torque application requirements













																			tch		
		tion	0		Propo	rtional		210 VDC Feedback	010 VDC Feedback	60	VAC	Q	VAC	ZH	Watts 60 H		р	Return	y Switc		
		Two-Position	Floating	010 VDC	210 ^a VDC	420 mA	69 VDC			24 VAC, 24 VDC	230, 240 VAC	120 VAC	100240 VAC 100125 VDC	VA @60	Running	Holding	Powered	Spring Re	Auxiliary Swi		
MA4D-7030														7.8	5.0	2.5				ccw	
MA4D-7033-100 MA4D-8030														5.1 7.8	5.0	2.5	<56	<23			
MA4D-8033-100														5.1						CW	
WF4D-7033-100 WF4D-8033-100											_			6.8	4.2	1.9				CCV	
MS4D-7033-100	30																				
MS4D-7033-150 MS4D-7033-160																	85	21		CCV	
/IS4D-8033-100														6.1	3.4	1.4					
MS4D-8033-150 MS4D-8033-160																				CW	
MA40-7040														4.3	3.4	1.2	<80	<40			
MA40-7040-501 MA40-7041															-		-00	140	1	-	
MA40-7041-501														4.6	3.9	1.2	<50	<28	1		
MA40-7043 MA40-7043-501	-													4.4	2.9	0.8	-50	1 20	1	-	
WF40-7043-501	35													F 0	4.4	0.0			'	1	
WF40-7043-501														5.9	4.4	2.9			1		
WS40-7043 WS40-7043-501			_								_			5.6	4.2	2.4	<130	<25	1	-	
VIS40-7043-MP														6.6	5.0	3.2					
WS40-7043-MP5 WA41-7070														0.0	5.0	0.2			1	-	
MA41-7070-502														5.6	3.6	1.2	<80	<40	2		
MA41-7071 MA41-7071-502														8.0	4.0	1.4					
MA41-7071-502 MA41-7073														4.0	3.2	0.0	<80	<40	2	1	
MA41-7073-502	60													4.8	3.2	0.8			2		
MF41-7073 MF41-7073-502														6.2	4.8	2.8				2	1
MS41-7073														5.8	4.6	2.3	<195				
WS41-7073-502 WA41-7150																		-	2	-	
MA41-7150-502														10.0	8.4	3.3			2	CW/	
MA41-7151 MA41-7151-502			_											10.6	8.5	5.0		<30	2	-	
MA41-7153	133														7.5	2.8	<190				
MA41-7153-502 MF41-7153																			2	-	
MF41-7153-502														9.7	7.7	3.2			2		
WS41-7153 WS41-7153-502															7.4	2.9			2	-	
MA40-7170														8.4			<162	<82	2		
WS40-7170 WS40-7171														8.5			<147	<65		-	
//A40-7173	150													10.8 7.4			<162			1	
/F40-7173														8.1			<162	<82			
//S40-7173 //A41-7303			_											7.8			<147	<65		-	
MA41-7303-502														16 ¹			75		2	1	
MA41-7300 MA41-7300-502	-													21	9.5				2	-	
//S41-7303 ³	270													40.1	3.5	4.5		<20		1	
vIS41-7303-502 ³														16 ¹			4		2		
MS41-7303-W02 ³	-		-											16	9.5	-	150 4		2	-	
//S41-7303-WH2 ³														21 w/ heater 1	21 w/ heater				2		



a - Proportional models with a 2...10 VDC control signal accept a 4...20 mA signal with the use of a 500 ohm resistor.

1 - Class 2 power source.

3 - Also compatible with floating, pulse width modulating (PWM), and other DC signal inputs with use of the BEL-ZTH US Handheld Interface Module for Field Programming.

Mx4D-703x and Mx4D-803x Series 30 lb-in SmartX Direct Coupled Damper Actuators

Designed for controlling air dampers in building systems that require fail safe return, with two position, floating or proportional control.

- Two position models controlled by SPST controller
- Floating models controlled by SPDT floating controllers
- Jumper selectable control function direct/reverse action
- Spring return models provide 30 in-lb (3.4 N-m) of torque
- Polymer housing rated for NEMA 2/IP54
- Overload protection throughout stroke
- Floating and proportional models automatically adjust input span to match the damper/valve travel
- Compact size allows installation in limited space
- Manual override allows positioning of dampers and valves
- Directly mounts to 1/2 3" Schneider Electric ball valves.

Specifications	
Control signal	Refer to the tables for actuator models and control types
Power inputs	See table.
Connections	3 ft (91 cm) appliance (see * in table below) or 10 ft. (3m) ple- num cables enclosure accepts 1/2" (13mm) conduit connector.
Electrical outputs	Position Feedback voltage (proportional or floating only): For voltage rangers, the feedback signal is the same range as the input signal. The 4–20 mA current range and floating actuators have a 2–10 Vdc feedback signal. The feedback signal can supply up to 0.5 mA to operate up to four additional slave actuators.
Mechanical outputs	Travel: 95° nominal. Manual override: allows positioning of damper or valve using manual crank. RA/DA Jumper: Permits reverse acting/direct acting control (MS4D models only/)
Ambient temperature limits	Shipping and storage: -40–160°F (-40–71°C) Operating: -22–140°F(-30–60°C) Humidity: 15–95% RH, non-condensing
Location	NEMA 1. NEMA 2. UL Type 2 (IEC IP54) with customer supplied water tight conduit connectors. Enclosure is aur plenum rated.
Agency listings	UL 873: Underwriters Labratories (File #E9429 Category Temperature-Indicating and Regulating Equipment. Cul: UL LISTED for use in Canada by Underwriters Laboratories. Canadian standards C22.2 No. 24-93. This product fits in Installation Category (Overvoltage Category) II Per EN 61010-1.





	Torque	Spring	Actuator I	nputs		Outputs			Approximate Timing in seconds @ 70°F		
Part Number	Nm	Return	Control	Voltage	VA @ 60Hz	Feedback	Auxiliary Switch	Powered	Spring Return		
MA4D-7033-100		CCW		24 Vac/dc	5.1				23 MD5B-230 MD5B-230-S MD5B-24 MD5B-24-S		
MA4D-7030		CCVV	0:	120 Vac	7.8		No	56			
MA4D-8033-100		CW	2 position	24 Vac/dc	5.1	_		20			
MA4D-8030		Cvv		120 Vac	7.8						
MF4D-7033-100		CCW	Floating		6.8						
MF4D-8033-100	30 (3.4)	CW	Floating			2-10 vdc					
MS4D-7033-100	30 (3.4)		2-10 vdc								
MS4D-7033-150		CCW	0-10 vdc	24 Vac/dc		0-10 vdc		85	21		
MS4D7033-160			4–20 ma	24 vac/dc	6.1	2–10 vdc		65	21		
MS4D-8033-100			2-10 vdc		0.1	2-10 VGC					
MS4D-8033-150		CW	0-10 vdc			0-10 vdc					
MS4D-8033-160			4–20 ma			2-10 vdc					



Mx4D-703x and Mx4D-803x Series 35 lb-in SmartX Direct Coupled Damper Actuators

Product description

For spring return applications requiring floating, two-position, or proportional modulation control of dampers and valves in HVAC systems. Directly mounts to 1/2"-3" Schneider ball valves.

- Direct mount to round or square damper shaft
- Overload protection throughout rotation
- Optional built-in auxiliary switches
- True mechanical clockwise or counter clockwise spring return operation for reliable, positive close-off in airtight applications
- Visual position indicator
- Direct acting or reverse acting control mode available on proportional models
- Rotation limiting available
- Rugged die-cast housing for NEMA 2/IP54

Specifications	
Control signal	On-off, SPST control contacts or Triacs (500 mA rated).
Power inputs	See table.
Connections	MA40-704x and MA40-704x-501 – 3ft. (91 cm) long, appliance cables, 1/2" conduit connector. For M20 Metric conduit, use AM-756 adaptor: MF40-7043 and MF40-7043-501 – 3ft. (91 cm) long, plenum-related cables, 1/2" conduit connector. For M20 Metric conduit, use AM-756 adaptor.
Electrical outputs	Position Feedback voltage "AO" 2–10 Vdc (maximum 0.5mA) output signal for position feedback or operation of up to four slave actua- tors. One auxiliary switch (select models). SPDT 6a resistive @ 24 Vac or 250 Vac.
Mechanical outputs	Travel rotation is limited to 95° ± maximum, adjustable from 40–95° with a mechanical stop. RA/DA switch: selects direct acting or reverse acting for proportional models. Position Indicator: Visual indicator 0–1 (0 is the spring return postion).
Ambient temperature limits	Shipping and storage: -40-160°F (-40-71°C) Operating: -22-140°F(-30-60°C) Humidity: 5-95% RH, non-condensing
Location	NEMA 2 IEC IP54
Agency listings	UL 873: Underwriters Labratories (File #E9429 Category Temperature-Indicating and Regulating Equipment). Cul: UL LISTED for use in Canada by Underwriters Laboratories. Canadian standards C22.2 No. 24.





	Torque	Spring	Actuator Ir	nputs		Outputs		Approximate Timing in seconds @ 70°F	
Part Number	Nm	Return	Control	Voltage	VA @ 60Hz	Feedback	Auxiliary Switch	Powered	Spring Return
MA40-7040							_		
B44 40 7040 F04				120 Vac	4.3		1-SPDT (250)Vac		
MA40-7040-501							_		
MA40-7041			2 position	230 Vac	4.6		4 0007 (050))	<50	<28
MA40-7041-501				200 100		_	1-SPDT (250)Vac		
MA40-7043					4.4		_		
MA40-7043-501	30 (4)	CW/ CCW					1-SPDT (24)Vac		
MF40-7043			F14:				_		
MF40-7043-501			Floating	24 Vac/			1-SPDT (24)Vac		
MS40-7043			0.40	dc	5.9	0.40	-		
MS40-7043-501			2-10 vdc			2-10 vdc	1-SPDT (24)Vac	<130	<25
MS40-7043-MPa							_	+	
MS40-7043-MP5a			6–9 vdc		6.6		1-SPDT (24)Vac	-	

a - For MP and MP5; Provides auxiliary power supply +20 Vdc 25 mA maximum.



Mx41-7000 Series 60 lb-in and 133 lb-in SmartX Direct Coupled Damper Actuators

Product description

Designed for controlling air dampers in building systems that require fail safe return, with two position, floating or proportional control.

- Direct mount to round or square damper shaft
- Overload protection throughout rotation
- Optional built-in auxiliary switches
- · Provides true mechanical clockwise or counterclockwise spring return operation for reliable positive close-off in airtight applications.
- Direct acting or reverse acting control mode available on proportional models
- Rotation limiting available
- Rugged die-cast housing for NEMA 2/IP54
- 5-year warranty

On-off, SPST control contacts or Triacs (500 mA rated)
Floating point control, 24 Vac.
10 Vdc or 4 to 20 mA dc with a 500 Ω resistor.
See table.
3 ft. appliance cables, 1/2 in. conduit connector
Position Feedback voltage "AO" 2–10 Vdc (maximum 0.5mA) output signal
for position feedback or operation of up to four slave actuators. Two
auxiliary switches available (select models). SPDT 7a resistive @ 24 Vac
or 250 Vac.
Travel rotation is limited to 95° ± 5 maximum, adjustable from 30–95° with
a mechanical stop. Position indicator: Pointer and scale are provided.
Manual Override: manual adjustable rotation -5-85°
Shipping and storage: -40-160°F (-40-71°C)
Operating: -22-140°F(-30-60°C)
Humidity: 5-95% RH, non-condensing
NEMA 1, NEMA 2 (IEC IP54) with conduit connector in down pos.
UL 873: Underwriters Labratories (File #E9429 Category Temperature-
Indicating and Regulating Equipment). Cul: UL LISTED for use in Canada
by Underwriters Laboratories. Canadian standards C22.2 No. 24.





	Torque		Act	uator Inputs		(Outputs	Approximat	
Part Number	Nm	Spring Return	Control	Voltage	VA @ 60Hz	Feedback	Auxiliary Switch	seconds	Spring Return
MA41-7070							_		
MA41-7070-502				120 Vac	5.6		2-SPDT (250)Vac		
MA41-7071	00 (7)			230 Vac	0.0		_	.00	. 10
MA41-7071-502	60 (7)				8.0		2-SPDT (250)Vac	<80	<40
MA41-7073			2 position	24 Vac/dc	4.8		_		
MA41-7073-502		CW/		24 Vac/uc	4.0		2-SPDT (24)Vac		
MA41-7150				120 Vac	10.0		_	<190	
MA41-7150-502				120 VaC	10.0	_	2-SPDT (250)Vac		
MA41-7151	133 (15)			230 Vac	10.6	_	_		
MA41-7151-502	100 (10)			200 400	10.0		2-SPDT (250)Vac		
MA41-7153		CCW			9.7		_		
MA41-7153-502					5.1		2-SPDT (24)Vac		
MF41-7073	60 (7)				6.2		_		
MF41-7073-502	00 (1)		Floating		0.2		2-SPDT (24)Vac	100	<30
MF41-7153	133 (15)		ribating		9.7		_	<190	
MF41-7153-502	100 (10)			24 Vac/dc	0.1		2-SPDT (24)Vac	-100	
MS41-7073	60 (7)				5.8		_	<195	
MS41-7073-502	00 (7)				5.0		2-SPDT (24)Vac	~190	
MS41-7153	133 (15)		2-10 vdc		9.7	2-10 vdc		<190	
MS41-7153-502	133 (15)				9.7		2-SPDT (24)Vac	190	



Mx40-717x Series 150 lb-in SmartX Direct Coupled Damper Actuators

Product description

Designed for controlling air dampers in building systems that require fail safe return, with two position, floating or proportional control.

- Direct mount to round or square damper shaft
- Overload protection throughout rotation
- Oil immersed gear train provides continuous lubrication
- · Automatic current sensing motor control provides extended reliability and repeatable timing
- Provides true mechanical clockwise or counterclockwise spring return operation for reliable positive close-off in airtight applications
- Can be double-mounted (gang mounting) to accommodate high torque application requirements (2 to 4 actuators)
- MS40-717x models produce position feedback signal
- Linkage required for Globe Valve Assembly.

Specifications	
Control signal	Two wire, SPST or Triacs (500 mA rated) SPDT floating control output, Triacs (500 mA rated), or 2 SPST contacts. Proportional 2 to 10 Vdc or 4 to 20 mA dc with a 500 Ω (not included).
Power inputs	See table.
Connections	Class 1: 24 inch (61 cm) long appliance cables, 18 AWG color coded leads. 1/2 in. conduit connector. Class 2: Power and control: 36 inch (91 cm) Long, 22 AWG color coded appliance cable pigtail leads. 1/2 in. conduit connector.
Electrical outputs	Travel: Electronically limited to 92° \pm 1 ° (MS). MF-MA Mechanically limited to 101° \pm 1 °
Mechanical outputs	Position indicator: pointer and scale are provided
Ambient temperature limits	Shipping and storage: -40–160°F (-40–71°C) Operating: -22–140°F(-30–60°C) Humidity: 5–95% RH, non-condensing
Location	NEMA 1,NEMA 2 (IEC IP54) with customer supplied water tight conduit connectors.
Agency listings	UL 873: Underwriters Labratories (File #E9429 Category Temperature- Indicating and Regulating Equipment). Cul: UL LISTED for use in Canada by Underwriters Laboratories. Canadian standards C22.2 No. 24–93.





	Torque		А	ctuator Inpu	ts	Outputs		Approximate Timing in seconds @ 70°F	
Part Number	Nm	Spring Return	Control	Voltage	VA @ 60Hz	Feedback	Auxiliary Switch	Powered	Spring Return
MA40-7170			2-position 120 Vac 8.4 24 Vac/ 7.4						
MA40-7173				24 Vac/	7.4	_		162	82
MF40-7173	150(17)	CW/CCW	Floating	dc	8.1		- No		
MS40-7170	150(17)	CVV/CCVV		120 Vac	8.5			147	65
MS40-7171			2-10 vdc	240 Vac	10.8	2-10 vdc			
MS40-7173				24 Vac/dc	7.8				



Mx41-730x Series 270 lb-in SR SmartX Damper Actuators

Mx41-730x Series Spring Return SmartX Actuators are available with two position 24 Vac/Vdc, Two position 100–230 Vac, and 2–10 Vdc input signal models for other input signals such as floating and pulse width modulating (PWM).

- Mechanical spring return, manual override and brushless DC Motor
- · Stall protected throughout rotation and reversible mounting
- Models for auxiliary switch applications
- Direct mount to 1/2"-3/4" round or 1/2"-11/16" square damper shafts of to 3/4"-1.05" round with the field removal of a clamp insert
- 95° of rotation, adjustable with mechanical end stops and graduated position indicator showing 0°-95°
- Can be double-mounted (gang mounting) to accommodate high torque application requirements
- 5-year warranty.

Specifications	
Control signal Optional control signal (MS41 models only)	Two position, 2–10 Vdc¹ Floating, Pulse width modulating (PWM), Adjustable start point and Span DC signal inputs with use of the BEL-ZTH US handheld interface module for field programming
Power inputs	See table.
Connections	3' appliance cable with 18 Ga. (0.9 mm) conductors and one 1/2" conduit connector -WO2/-WH2 models: Removable terminal blocks.
Electrical outputs	Position feedback: 2–10 Vdc, 0.5 mA max, adjustable with optional BEL-ZTH US Handheld Interfact Module for Field Programming. Auxiliary Switch: 2SPDT 3A (0.5 A) @ 250 Vac (see table)
Mechanical outputs	Travel: Angle of rotation 95° max. Position indicator: graduated position indicator showing 0°–95° Manual override: Actuators provided with 5 mm hex crank
Ambient temperature limits	Shipping and storage: -40–176°F (-40–80°C) Operating: -22–122°F(-30–50°C) Humidity: 5–95% RH, non-condensing
Location	NEMA 2 and NEMA 4 (select models; see table)
Agency listings	c-UL-us LISTED per UL 60730-1A & -2-14, and CAN/CSA E60730- 1:02, CE compliant to directives 2014/35/EU [LVD], 2014/30/EU EMC], and 2011/65/EU [RoHS2].





¹ Also compatible with two position, floating, PWM, and proportional input signals, refer to the SmartX Actuators Spring Return Damper Mx 730x Series Installation Instructions, F27870.

	Torque	Spring	Α	Actuator Inputs		Outputs		Approximate Timing in seconds @ 70°F			
Part Number	Nm	Return	Control	Voltage	VA @ 60Hz	Feedback	Auxiliary Switch	Powered	Spring Return	NEMA 4	Heater
MA41-7303				24 Vac	16 VA		_			-	
MA41-7303-502			Two	24 Vac	10 VA		2	75			
MA41-7300					21 VA at	_	-				
MA41-7300-502		CW/	position	100–240 Vac	100 Vac, 29 VA at 240 Vac		2				-
MS41-7303	270 (30)	CCW					_		<20		
MS41-7303-502					16 VA						
MS41-7303-W02			2-10	24 Vac		10.8		150		Yes	
MS41-7303-WH2			vdc	2. 740	16 VA and 21 W heater	7.8	2	.50			Yes



Overview - NSR SmartX Damper Actuators

High performance HVAC applications

Mx41-60xx Series

- 44 lb-in (5 N-m) and 88 lb-in (10 N-m) torque
- · Compact lightweight design
- · Easy-to-see position indicator
- · Self-adapting capability for maximum flexibility in damper positioning
- Quiet, low-power operation
- · Manual override
- · Plenum cable standard
- Independently adjustable dual auxiliary switches option available (Mx41-6083-502)
- Feedback position output signal available (MS41-6043/6083 series)
- c-UL-us LISTED and CE marked.

Mx41-6153 Series

- Synchronous motor technology with stall protection
- Unique self-centering shaft coupling
- Manual override
- 133 lb-in (15 N-m) torque
- 5 preload as shipped from factory
- Mechanical range adjustment capabilities
- Independently adjustable dual auxiliary switches option available (MS41-6153-502)
- Built-in 1/2" conduit connection
- c-UL-us LISTED and CE marked.

Damp and Harsh Environment Applications

Mx41-63xx Series

- 300 lb-in (34 N-m) torque
- NEMA Type 4 housing (IEC IP56)
- Custom automatic current sensing motor control provides extended reliability and repeatable timing
- Direct coupled to damper shaft with dual industrial hardened universal mounting clamps
- Integral wiring for proportional control by 2–10 Vdc or 4–20 mA dc
- Clockwise or counterclockwise rotation is determined by actuator mounting position
- Manual override for ease of installation and manual operation of damper
- Accurate 92° travel digitally controlled
- Integral position indication scale
- Rugged die-cast housing
- Oil immersed gear train provides continuous lubrication
- Rated for operating temperatures up to 140°F (60°C)
- 5 year warranty
- MS41-634x SmartX Actuators can be double mounted (gang mounting) to accommodate high torque application requirements (2 to 4 actuators)
- Position feedback signal
- c-UL-us LISTED and CE marked

					Proportional				0				Running	Holding		Resistive, 24 VAC	Resistive, 24 VAC
	Min	Max Stall	Floating	010 VDC	210 VDC ^a	420 mA	210 VDC	010 VDC	24 VAC, 24 VDC	24 VAC	120 VAC	VA @60Hz	Watts @60Hz	Watts @60Hz	Powered	SPDT, 6A, Resi	SPDT, 4A Resi
MF41-6043												2.3			90		
MS41-6043	44											3.3			90		
MF41-6083												2.3					
MF41-6083-502												2.3					2
MS41-6083	88											3.3					
MS41-6083-502												3.3			125		2
MF41-6153												3					
MS41-6153	133											-		4			
MS41-6153-502												5	4	1		2	
MF41-6343												5.7	3.9	2.8	<162		
MS41-6343	300	650										5.6	3.6	2.4	<145		
		1													~ 140		









Mx41-60x3 Series

44 and 88 lb-in NSR SmartX Direct Coupled Damper Actuators

These direct coupled 24 Vac non-spring return rotary electric SmartX Actuators are designed for three position (floating) control of the dampers

- Compact, lightweight design
- Easy-to-see position indicator
- Self-adapting capability for maximum flexibility in damper positioning
- Quiet, low-power operation
- Plenum cable standard
- Independently adjustable dual auxiliary switches option available (Mx41-6083-502)
- Feedback position output signal available (MS41-6043/6083 series).

Specifications	
Control signal	MF41-60x3 – Floating three-position control, 24 Vac. MS41-60x3 – Proportional, 0 to 10 Vdc; input resistance 100 kW
Power inputs	See table
Connections	3' (0.9 m) appliance cable, 18 AWG plenum-related leads
Electrical outputs	Position feedback for MS41-6043/6083: 0–10 Vdc, 1mA. Auxiliary switches: dual auxiliary switches available with MF41- 6083-502, MS41-6083-502 when these actuators are ordered as separate units. Auxiliary switches are not offered with factory ball valve assemblies
Mechanical outputs	Travel: Normal angle of rotation is 90° limited to a maximum of 95° Field adjustable to limit travel on either end of stroke
Ambient temperature limits	Shipping and storage: -40–158°F (-40–70°C) Operating: -25–130°F(-32–55°C) NOTE: Check the valve operating temperature limit. The minimum valve temperature limit is 20°F (6.7°C) 5–95% non-condensing.
Location	NEMA Type 2 (IEC IP54)
Agency listings	c-UL-us LISTED per UL 873 and CAN C22.2 No.24-93. CE compliant to directive LVD, EMC, RoHS2

Part Number	Torque	Ac	tuator Inpu	va @	Outputs		Approximate Timing in seconds @ 70°F
	Nm	Control	Voltage 60Hz		Feed- back	Auxiliary Switch	Powered
MF41-6043	44(5)						90
MF41-6083	00/40\	Float- ing		2.3	_	_	125
MF41-6083-502	88(10)	9				2-SPDT	
MS41-6043	44(5)					_	90
MS41-6083			24 Vac				
MS41-6083-502	88(10)	0-10 Vdc		3.3	0-10 Vdc	2-SPDT	125







Mx41-6153 Series 133 Ib-in NSR SmartX Direct Coupled Damper Actuators

The direct coupled 24 Vac non-spring return electric SmartX actuator is designed for modulating and three-position control of building HVAC dampers requiring up to 133 lb-in (15 Nm) torque.

- Synchronous motor technology with stall protection
- Unique self-centering shaft coupling
- 5° preload as shipped from factory
- Mechanical range adjustment capabilities
- Independently adjustable dual auxiliary switches option available (MS41-6043-502)
- Built-in 1/2" conduit connection.

Specifications	
Control signal	MF41-6153 – floating three position control, 24 Vac. MS41-6153, MS41-6153-502 – Proportional, 0 to 10 Vdc; input resistance 100 kW
Power inputs	See table
Connections	3' (0.9 m) long, 18 AWG leads
Electrical outputs	Position output signal (wires 9-2) MS41-6153 Series Voltageoutput 0–10 Vdc. Maximum output current 1 \pm mA
Mechanical outputs	Nominal angle of rotation is 90° Maximum angular rotation 95°
Ambient temperature limits	Shipping and storage: -40–158°F (-40–70°C) Operating: -25–130°F(-32–55°C) Ambient humidity: 95% non-condensing
Location	NEMA1/IP54 according to EN 60 529
Agency listings	c-UL-us LISTED per UL 873 and CAN C22.2 No.24-93. CE compliant to directives LVD, EMC, RoHS2

		Ad	ctuator Inpu	ıts	0.4		Approximate
Part Number	Torque			Out	puts	Timing in seconds @ 70°F	
	Nm	Control	Voltage	VA @ 60Hz	Feedback	Auxiliary Switch	Powered
MF41-6153		Floating		3	-		
MS41-6153	133 (15)		24Vac			_	125
MS41-6153-502		0-10 Vdc		5	0-10 Vdc	2-SPDT	







Mx41-634x Series 300 lb-in NSR SmartX Direct Coupled Damper Actuators

Direct Coupled SmartX actuators are designed to be used in both damper and valve control applications. The MS41-634x series actuators are over the shaft non-spring return actuators compatible with 0-10 Vdc or 4-20 mA dc1 control signals.

- Custom automatic current sensing motor control provides extended reliability and repeatable timing
- Direct coupled to the damper shaft with dual industrial hardened universal mounting clamps
- Clockwise or counterclockwise rotation is determined by actuator mounting position
- Accurate 92° travel digitally controlled
- Integral position indication scale
- Oil immersed gear train provides continuous lubrication
- Rated for operating temperatures up to 140 F (60 C)
- 5 year warranty
- MS41-634x SmartX Actuators can be double-mounted (gang mounting) to accommodate high torque application requirements (2 to 4 actuators)
- Position feedback signal.

Specifications	
Control signal	SPDT floating control input; Triacs (500 mA rated) or 2 SPST contacts Floating: 24 Vac ± 20% Proportional: 2–10 Vdc 4-20 mAdc ^a
Power inputs	See table
Connections	3' (91 cm) Appliance cable, 1/2" conduit connectors
Electrical outputs	Travel: Mechanically limited to 101° $\pm 1^\circ$
Mechanical outputs	Overload Protection: Throughout rotation. Nominal angle of rotation is 93° Position Indication: Scale numbered 0–95° Manual override: allows manual positioning
Ambient temperature limits	Shipping and storage: -40-160°F (-40-71°C) Operating: -25-140°F(-32-60°C) Ambient humidity: 5-95% non-condensing
Location	NEMA Type 1. NEMA Type 4 (IEC IP56) with customer supplied water tight conduit connectors
Agency listings	c-UL-us LISTED per UL 873 and CAN C22.2 No.24-93. CE compliant to directives LVD, EMC, RoHS2



	Torque	Actuator Inputs		Out	outs	Approximate Timing				
Part Number	Torque			V/A @	•		in seconds @ 70°F			
rai (Nullibei	Nm	Control	Voltage	VA @ 60Hz	Feedback	Auxiliary Switch	Powered			
MF41-6343		Floating	24 Vac/	5.7	-		162			
MS41-6343	300 (34)	2–10	2–10	2–10	2–10 C	dc	5.6	0.40.\/- -	No	140
MS41-6340		Vdc	120 Vac	7.5	2–10 Vdc		148			







0453X Series Two-position Damper Actuators

The 0453L, light duty Damper Actuators are designed for a variety of Two-position, spring return, damper applications. The 0453L uses a two-wire thermostat control.

The 0453H medium duty Damper Actuators are designed for a variety of Two-position, spring return damper applications. The 0453H uses a two-wire thermostat control.

The 0453R heavy duty Damper Actuators are designed for a variety of Two-position, motor open and motor closed damper applications. The 0453R uses a three-wire thermostat control.

Features

- Available with end switch
- Linkage or direct drive available
- · Hysteresis synchronous motor with "lost motion" drive to protect gear train from closing shock

Specifications	
<u>'</u>	
Inputs Voltage	24 Vac @ 50/60 Hz, 110/120 Vac @ 50/60 Hz 220/230 Vac @ 50/60 H
Power	See Model table
Connections	Internal junction box, 18" leads, cord set
Outputs Mechanical	Optional End Switch ;10 A @ 120 Va
Direction of rotation	CW or CCW rotation is available
Linkage	Customer supplied
Direct drive	For 5/16" maximum damper output shaft with maximur engagement of 7/8'
Environment temperature limits: Shipping and storage	-40 to 169°F (-40 to 71°C
Operating humidity	0 to 120°F (-17 to 49°C Non-condensing
Shipping weight	0453L & 0453H: 1.2 lbs (544 g); 0453R: 1.7 lbs (771 g)
Location	NEMA
Regulatory compliance (All are rated for use in Plenum spaces). Models 0453L, 0453H	c-UR-us RECOGNIZEI Components, safety evaluated per UL 60730-1 2-2-14, (including US FCC Part-15 Class-B emissions) and safet evaluated per CSA/CAN E60730-1 & -2-14, (including ICES-00: Class-B emissions
Models 453L, 453H, 453R:	CE Mark compliant, safety evaluated per EN 60730-1 & -2-14 (including EN 61000-6-2 EU immunity & EN 61000-6- EU emissions
Optional accessories	



Linkage Drive



Direct Drive


lodel Table								
	To	orque ra	ting in	oz.	De	wer	Stroke spee	d in seconds
Model Number	Motor	Driven	Spring	g Return	PO	wer	Matau Duissan	Oi B-t
Nullibei	0°	84°	0°	84°	W	VA	Motor Driven	Spring Return
0453L	45	25	17	25	6.5	7	18 @ 60 Hz 22 @ 50 Hz	6 @ 50/60 Hz
0453H	55	35	35	55	6.5	10	27 @ 60 Hz 32 @ 50 Hz	8 @ 50/60 Hz
0453R	150	150	-	-	6.5	7	37 @ 60 Hz 45 @ 50 Hz	-



12 to 20" damper shaft kit

453-69

Damper Accessories

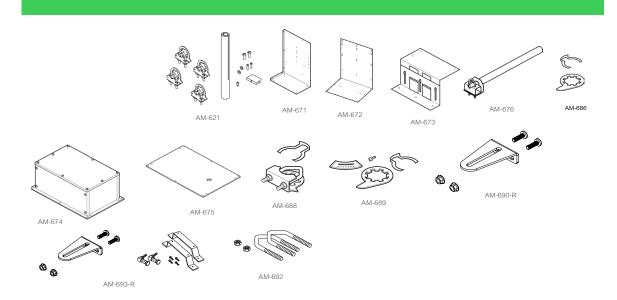

				Sprii	ng Re	eturn Ad	ctuato	ors			No	n Sp	ring F	Retur	n Acti	uators	3
Part Number	Description	MA40-7043 MF40-7043	MS40-7043	MA41-7073 MF41-7073	MS41-7073	MA41-7153 MF41-7153	MS41-7153	MA40-717x MF40-7173	MS40-7173	MS4D-x033	MF41-6043 MS41-6043	MF41-6083	MS41-6083	MF41-6153	MS41-6153	MF41-6343	MS41-6343
AM-621	Round Shaft Extension																
AM-671 ^{abcd} AM-672 ^{abcd} AM-673 ^c	Mounting Bracket																
AM-674	Weather Shield &																
AM-675	Base																
AM-676	Shaft Extension																
AM-686	Position Indicator																
AM-687 ^e	V-clamp																
AM-688	Replacement Universal Clamp																
AM-689	Rotation Limiter																
AM-690-Ri	Crank Arm																
AM-692 ^f	V-bolt																
AM-693-R ^{gh}	Crank Arm Kit																


a - AM-693 crank arm kit required.

a - AM-693 crank arm kit required.
b - Cannot be used with Mx41-634x or Mx40-717x series actuators.
c - Drill appropriate mounting holes where needed.
d - The large "C"-shaped clamps included in AM-693 crank arm kit are required for mounting the actuator. Drill appropriate mounting holes where needed.

e - For shafts to 1.05" diameter or 5/8" square. f - For shafts to 3/4" and 1.05" diameter (with AM-690 and AM-691, respectively).

g - Use the self-tapping screws and flat washers provided in kit to mount actuator.
h - AM-692 V-bolt kit required. The AM-693-R damper linkage kit is used in conjunction with the AM-687 or AM-688 universal clamps to provide a mechanical linkage between the damper actuator and the damper shaft when a direct coupling is not possible.
i - Used in conjunction with the AM-687 or AM-688 universal clamps for crankarm functionality in non-direct mounting applications.

Damper Accessories

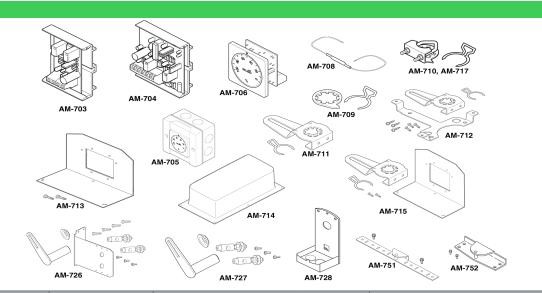


				Sprir	ng Re	eturn Ad	ctuato	ors				N	on Sp	oring	Retu	rn Ac	tuato	rs	
Part Number	Description	MA40-7043 MF40-7043	MS40-7043	MA41-7073 MF41-7073	MS41-7073	MA41-7153 MF41-7153	MS41-7153	MA40-717x MF40-7173	MS40-7173	MS4D-x033	MF41-6043	MS41-6043	MF41-6083	MS41-6083	MF41-6153	MS41-6153	MF41-6343	MS41-6343	Mx41-730x
AM-703	Span Adjustment																		
AM-705																			
AM-706	Positioner																		
AM-708	500 Ω Resistor																		
AM-709	Position Indicator & Stroke Limiter																		
AM-710 ^a	V-clamp																		
AM-711	Crank Arm Adaptor Kit																		
AM-712	Crank Ann Adaptor Nit																		
AM-713	Bracket																		
AM-714	Weather Shield																		
AM-715	Crank Arm Adaptor Kit																		
AM-717	Replacement Universal Clamp																		
AM-726	Crank Arm Adaptor																		
AM-727	Clarik All I Adaptor																		
AM-728 ^b	Conduit Adaptor																		
AM-751	Anti-rotation Bracket																		
AM-801	Mx41-730x-xxx Actuator Crank Arm Kit																		
AM-802	Mx41-730x-xxx Actuator Crank Arm Kit with Actuator Mounting Bracket and Two Ball Joints																		
AM-803	9-3/4" damper Shaft Extension for 5/16"1" Diameter Round Shafts																		
AM-804	Jackshaft Linkage (requires AM-805 Support Plate for Mx41-73xx Actuators)																		
AM-805	Support Plate for Mx41- 73xx Actuators																		
BEL-ZTH	US Handheld Interface Module for Field Programming of the MS41-7303-xxx Models																		

a - For shafts up to %" (19 mm) diameter round up to %" (13 mm). b - Cannot be used when creating a linked valve/actuator assembly.



Damper Accessories

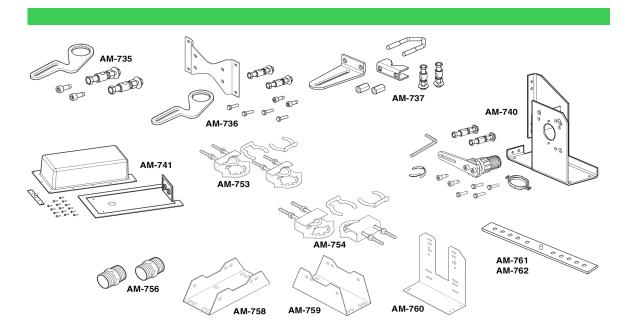

				Sprii	ng Re	eturn Ad	ctuato	ors			No	n Sp	ring F	Returi	n Actu	uators	3
Part Number	Description	MA40-7043 MF40-7043	MS40-7043	MA41-7073 MF41-7073	MS41-7073	MA41-7153 MF41-7153	MS41-7153	MA40-717x MF40-7173	MS40-7173	MS4D-x033	MF41-6043 MS41-6043	MF41-6083	MS41-6083	MF41-6153	MS41-6153	MF41-6343	MS41-6343
AM-735	Crank Arm Kit																
AM-737	Universal Crank Arma																
AM-741	Weather Shield																
AM-753 ^b	Mounting Clamp																
AM-754°	Woulding Clamp																
AM-756	Metric Conduit Adaptor																
AM-758	Short "U" Mounting Bracket																
AM-759	Tall "U" Mounting Bracket																
AM-760	Slotted "L" Mounting Bracket																
AM-761	7-inch Anti-rotation Bracket																
AM-762	9-inch Anti-rotation Bracket																

a - For Honeywell Floor Mount Mod. Motor. b - For shafts %" (19 mm) round and 5/8" (15.9 mm) square. c - For shafts 3/8".../%" (10...13 mm) round and square. d - Only used on Mx41-707x-xxx, Mx41-715x-xxx.

Foot Mounted Actuators

Overview: Foot Mount Actuators

Product Overview

MA-3/4xx Series: These actuators provide two-position operation of dampers, valves, and other equipment requiring the return to normal position upon power interruption.

MC-351/421/431: These actuators provide two-position operation of dampers or valves in heating, ventilating, and air conditioning systems, and similar applications where return-to-normal position is not required.

MP-3xx Series, MP-4xx Series, MP-2xxx Series, and MP-4xxx Series: These actuators are used for two-position, floating, and proportional control of dampers, valves, and program switches in heating, ventilating, air conditioning, and similar applications. Hazardous location models offer a sturdy cast aluminum case with bolted cover. They have two 3/4" pipe tapped openings for joints with rigid metal conduit. All wiring is brought out to separate terminals for ease of installation.


These factory enclosure and actuator assemblies are from Underwriters Laboratories Listed.

MP-9xxx Series Reversible and Proportional Electric Actuators: These actuators provide control of heavy dampers, large valves, and other high torque applications in heating, ventilating, air conditioning, and similar applications which do not require return to a normal position.


The CP-8301-xxx electronic actuator drive is designed to process a variable 2 to 15 Vdc signal from a controller to provide proportional control of an electric gear train actuator.

The CP-8391-716 and 913 electronic actuator drives are designed to process a variable 4 to 20 mAdc signal from a controller to provide proportional control of an electric gear train actuator.

The CP-9301 and CP-9302 electronic actuator drives process a variable input signal from a controller to provide proportional control of an electric gear train actuator.



MA-3xx, MA-4xx (Standard)




MA6-3xx, MA6-4xx, MA8-4xx, MA7-4xx




Spring Return MP-3/-4xx Series, MP-2/-4xxx Series



Non-Spring Return Spring Return MP-3/-4xx Series, MP-2/-4xxx Series, MC-351/421/431



CP-8301-xxxx. CP-8391-913



CP-9301/930


MA-3/4xx Series Two-position Oil-Submerged Actuators

These actuators provide two-position operation of dampers, valves, and other equipment requiring the return to normal position upon power interruption.

Features

- SPST controller
- Spring return
- 24, 120 and 240 Vac models
- SPDT auxiliary switch if actuator part number suffix is "-500"
- · Rugged die cast aluminum
- Oil immersed motor and gear train
- · Models for hazardous locations are only available as a factory enclosure/actuator assemblies
- NEMA 4 with optional watertight conduit connectors, field supplies





MA6-3xx, MA6-4xx, MA8-4xx, MA7-4xx † Hazardous Locations

Specifications

Control circuit	24 Vac @ 50/60 Hz, 110/120 Vac @ 50/60 Hz, 220/230 Vac @ 50/60 Hz.
Spring return	CCW to original position when actuator is de-energized
Auxiliary switch	(-500 models) SPDT makes (or breaks) circuit at powered end of stroke (fixed)
Nominal damper area	Actuator sizing should be done in accordance with damper manufacturer's specifications
Environment Ambient temperature limits Shipping and storage Operating Humidity	-40 to 136°F (-40 to 58°C) -40 to 136°F (-40 to 58°C) 5 to 95% RH, non-condensing
Locations	NEMA 4a
Connections	Coded screw terminals
Case	Die cast aluminum with two 1/2 in. conduit openings
Mounting	Allow 6 in. (152 mm) clearance above the actuator wiring compartment Refer to Model Table for additional data
Dimensions Base actuators	5-3/4 H x 5-3/8 W x 6-9/16 D in. (146 x 136 x 167 mm)

 Base actuators
 5-3/4 H x 5-3/8 W x 6-9/16 D in. (146 x 136 x 167 mm)

 Hazardous location actuators
 8-7/8 H x 8-1/2 W x 10-5/8 D in. (225 x 216 x 167 mm)

 No load timing at 75°F (24°C)
 20 seconds

Agency Listings

UL 873 File E9429 Temperature Indicating and Regulating Equipment CSA C22.2 No. 24 File LR 3728

Installation Instructions F-06491

a - When used with gasket (provided) and water-tight conduit connectors (not provided).

b - Spring return timing with full load opposing spring approximately 60 seconds.

Model table

Model No.	Power	Supply	Aux.a	Input	Va Running/	Rated Torque	Application and Mounting	Shaft Rotation	
wodei No.	Vac	Hz	Switch	(Watts)	Holding	lb-in. (N-m)	Application and wounting	Shari Rolation	
MA-305	24		No		FC/FC				
MA-305-500	24		Yes	25	56/56	40 (4.0)	Damper actuators. Upright	CW 180° when	
MA-405	120		No	25	48/48	16 (1.8)	position preferred.	power is applie	
MA-405-500	120		Yes		40/40				
MA-318	24	60	No		00/20				
MA-318-500	24	60	Yes	-	92/32				
MA-418	120		No	70	400/40				
MA-418-500	120		Yes	Running	108/42	00 (0.0)	Damper and valve	CW 170° when	
MA-419	240		No	25		60 (6.8)	actuators. Output shaft horizontal.	power is applied	
MA-419-500	240	1	Yes	Holding	400/00		nonzontal.		
MA5-419	240	50	No		120/39				
MA5-419-500	240	50	Yes						

a - 2 FLA, 12 LRA at 24/120 Vac; 1 FLA, 6 LRA 2 240 Vac. † Models for hazardous locations are only available as factory enclosure/actuator assemblies.

Part Numbers for Hazardous Location Applications ab

Model No.	Damper Actuator Part Numbers for Hazardous Locations	Valve Actuator Part Numbers for Hazardous Locations
MA-305	_	-
MA-305-500	-	_
MA-405	MA6-405	_
MA-405-500	MA6-405-500	_
MA-318	_	_
MA-318-500	MA6-318-500	_
MA-418	MA6-418	MA8-418
MA-418-500	MA6-418-500	MA8-418-500
MA-419	_	_
MA-419-500	MA6-419-500	-
MA5-419	_	_
MA5-419-500	MA7-419-500	MA7-419-500

- a Class 1, Groups C and D, and Class 2, Groups E, F and G, hazardous locations. Ref. EN-56-2, F-18451.
- b Models for hazardous locations are only available as factory enclosure/ actuator assemblies.



MC-351/421/431 NSR Two-Position Actuators

This actuator provides two-position operation of dampers or valves in heating, ventilating, and air conditioning systems, and similar applications where return-to-normal position is not required.

Features

- Two-position actuators controlled by SPDT controller
- Non-spring return
- 24 and 120 Vac models available
- SPDT auxiliary switch is standard
- Rugged die cast aluminum housings
- Oil immersed motor and gear train


Specifications	
Control circuit	Three wire, SPDT snap acting switch provided by a thermostat, pressure switch, or relay
Shaft rotation	Unidirectional clockwise 180 when power is applied
Auxiliary switch	Adjustable SPDT is standard. Factory set to make (or break) at mid-stroke
Nominal damper area	Actuator sizing should be done in accordance with damper manufacturer's specifications
Environment Shipping and storage Operating Humidity	-40 to 136°F (-40 to 58°C) -40 to 136°F (-40 to 58°C) 5 to 95% RH, non-condensing
Locations	NEMA Type 1. NEMA 4 with AM-363
Connections	Coded screw terminals
Case	Die cast aluminum with two 1/2 in.conduit knock-outs on each side
Mounting Dampers Valves	Allow 6 in. (152 mm) clearance above the actuator wiring compartment Any position In any upright position with actuator above the center line of the valve body
Dimensions	7 H x 5-3/8 W x 6-5/16 D in. (178 x 137 x 160 mm)
Installation instructions	F-08366



Model No.			Input		No Load Timing	Rated Torque Ib-in.
woder No.	Volts	Hz	Watts	VA Rating	(sec/180°)	(N-m)
MC-351	24	60	28	53	70	220 (25)
MC-421	120	60	50	96	20	175 (19)
MC-431	120	60	50	96	30	220 (25)

Adjustable Auxiliary Switch SPDT Rating Amps

Туре	120 V
Running	5.8
Locked Rotor	34.8
Non-Inductive	12.0









MP-3/-4xx, MP-2/-4xxx Series Reversible and Proportional Electric Actuators

The MP Series Actuators are used for two-position, floating, and proportional control of dampers, valves, and program switches in heating, ventilation, and air conditioning applications or similar applications.

Features

- Proportional actuators with built-in feedback potentiometers.
- Spring return and non-spring return models available.
- 24 Vac, 120 Vac, and 240 Vac models are available.
- Die cast housings with four 1/2 in. conduit openings.
- Oil-immersed motor and gear train.

Specifications

Input Control signals: Refer to the Model Table for input control signal capability versus specific actuator models.

Floating Requires one Single Pole Double Throw (SPDT) switch with floating (center off) position rated at 0.9 amps at 24 Vac or two Single Pole Single Throw (SPST) switches rated at 0.9 amps at 24 Vac

 Two-position
 Requires snap acting switch rated at 0.9 amps at 24 Vac SPDT

 SPST
 Can be used with certain spring return actuators

 SPST
 Switch must be rated to handle actuator power requirements

Microtherm
Proportional Electrical system with the following typical controllers: PP-22x Series, TP-1xx Series, TP-2xx Series, TP-3xx Series, TP-3xx Series, TP-4xx Series, TP-1xxx Series, TP

Control of two actuators in sequence Slidewire and paralleling

 Current mAdc
 Requires CP-9302-xxx Series of solid state actuator drives. Refer to the Model Table

 Connections
 MP-3xx, 4xx, 2xxx, 4xxx Coded screw terminals Models -600 Suffix Coded screw terminals except for input signal which are color coded pigtails

 Power requirements
 Refer to the Model Table to determine power requirements

 Torque
 Refer to the Model Table to determine the actuator torque rating

 Nominal damper area
 Actuator sizing should be done in accordance with damper manufacturer's specifications

Spring return

Refer to the Model Table for models that are spring return

Environment
Shipping and storage
-40 to 160°F (-40 to 71°C)
-40 to 136°F (-40 to 58°C)

Operating Humidity

Locations

Operating 1-40 to 136 F (-40 to 136 F)

S to 95% RH, non-condensing 1-40 to 136 F (-40 to 136 F)

NEMA 1; NEMA 4 for non-spring return actuators with AM-363

NSR Models MP-3xx, 4xx, 2xxx, 4xxx 7 H x 5-3/8 W x 6-5/16 D in. (178 x 136 x 160 mm)

Dimensions

SR Models -600 Suffix 7 H x 5-3/8 W x 8-1/8 D in. (178 x 136 x 206 mm)

SR plus actuator drive housing

UL 873 File E9429 Temperature Indicating and Regulating Equipment CUL Canadian Standard #LR 3728 European Community EMC Directive 89/336/EEC and 92/31 EEC

Requires AE-504 paralleling relay

Agency listings

Low voltage Directive 39/35/EEC and 92/31 EEC


Low voltage Directive 72/23 EEC

Units with a "-xxx-x-2" suffix identify models that


are in compliance with CE Example: MP-xxxx-xxx-x2

Installation instructions


F-15479



Spring return



Non-spring return



-6xx with CP-9301 or CP-9302 installed

Model Table MP-3xx Series

		Solid State Drive	Pov	ver Re	quirements		Output Sha	ft		A	Built-in	
Model No.	Application	CP-8301-xxx, CP-9301 CP-9302	Volts	Hz	Amps	Torque lbin. (N-m)	Timing Seconds (No Load)	Degrees of Rotation	Spring Return	Aux. Switch	Transformer	
MP-361	Proportional	Available						180 (Adj. b)	CW	SPDT		
MP-361-600c	Froportional	CP-8301-024 Included			2.5	50 (5.6)	90	160 (Auj)	CVV	SEDI		
MP-371	Proportional	Available						100 (SPDT		
MP-371-600 c	Froportional	CP-8301-024 Included	24	60		(5.0)		180 (non Adj.)	CCW			
MP-377	Sequencing	_	24	00				Auj.)		SPST	_	
MP-381	Proportional	Available				000	130	400		SPDT		
MP-382	Froportional	Available			2.2	220 (24.9)	130 to 1300	180 (Adj. ^b)	No	SFDI		
MP-387	Sequencing	Available				(24.9)	130	(Auj.)		SPST		

a - Units with a "-2" suffix, e.g., MP-xxxx-xxx-2-x, include a built-in transformer (used for Microtherm or with AE-504) with secondary loads wired externally to terminals seven and eight of the actuator. Red (24 Vac) to terminal eight and Blue (12 Vac) to terminal seven. When these actuators are used with controllers other than Microtherm or AE-504, disconnect the Red and Blue leads and tape off. Note: Models prior to "-2" suffix had transformer wired directly to potentiometer. To disconnect the transformer, remove the back plate of the actuator, disconnect, and tape the transformer leads. b - Rotation adjustable 45 to 320. Caution: On actuators with proportional input signals changing the rotation will affect the control, since the internal feedback potentiometer's travel is fixed. c - Integral solid state drive CP-8301 accepts 6-9 Vdc voltage with 20 Vdc power supply included.



MP-3/-4xx, MP-2/-4xxx Series Reversible and Proportional Electric Actuators

MP-4xx Series Model Table

			Powe	r Require	ements		Output Sha	ft			
Model No.	Application	Solid State Drive CP- 8301-xxx, CP-9301, CP-9302	Volts Hz Amps		Torque lbin. (N-m) Timing Seconds (No Load)		Degrees of Rotation	Spring Return	Aux. Switch	Built-in	
MP-422							25 to 250	180 (Adj. b)			
MP-423						60 (6.8)	13	00 (4 11 1)			
MP-424							13 to 130	90 (Adj. b)			
MP-451							80	180 (Adj. b)	No		
MP-452	Proportional	Available			0.65	220	80 to 800	160 (Adj. b)		SPDT	
MP-453						(24.9)	40	90 (Adj. b)			_
MP-454						(=,	40 to 400	90 (Auj. b)			
MP-461-600	6 to 9 V Proportional	CP-8301-120 Included						180 (Adj. b)	CW		
MP-465	Proportional	Available						160 (Auj. b)	CVV		Ye
MP-471-600	6 to 9 V Proportional	CP-8301-120 Included	120	60		50 (5.6)	90	180 (non-adj.)		SPDT	-
MP-475	Proportional	Available						160 (non-auj.)		SPDI	Ye
MP-481	Proportional	Available								SPDT	
MP-481-600	6 to 9 V	CP-8301-120 Included			0.5						
MP-481-691 c	Proportional	CP-9301 Included						180 (Adj. b)	- No		-
MP-483	Proportional Available						65	90 (Adj. b)	NO	SPDT	
MP-485							130			51.01	
MP-486		Available					130 to 1300	180b			Ye
MP-495				0.95	450 (50.9)	130					

a - Units with a "-2" suffix, e.g., MP-xxxx-xxx-2-x, include a built-in transformer (used for Microtherm or with AE-504) with secondary loads wired externally to terminals seven and eight of the actuator. Red (24 Vac) to terminal eight and Blue (12 Vac) to terminal seven. When these actuators are used with controllers other than Microtherm or AE-504, disconnect the Red and Blue leads and tape off. Note: Models prior to "-2" suffix had transformer wired directly to potentiometer. To disconnect the transformer, remove the back plate of the actuator, disconnect, and tape the transformer leads.

MP-2xxx Series

			Power Requirements		Output Shaft				g		
Model No.		Solid State Drive CP- 8301-xxx, CP-9301, CP-9302	Volts	Hz	Amps	Torque lbin. (N-m)	Timing Seconds (No Load)	Degrees of Rotation	Spring Return	Aux. Switch	Built-in Transformer
MP-2113-500			24		2.2			180 (non- Adj.)			-
MP-2130-500		Available	400	60	0.5	50 (5.6)	25	90 (non- Adj.)	No	SPDT	Vaa
MP-2150-500			120					180 (non- Adj.)			Yes

a - Units with a "-2" suffix, e.g., MP-xxxx-xxx-2-x, include a built-in transformer (used for Microtherm or with AE-504) with secondary loads wired externally to terminals seven and eight of the actuator. Red (24 Vac) to terminal eight and Blue (12 Vac) to terminal seven. When these actuators are used with controllers other than Microtherm or AE-504, disconnect the Red and Blue leads and tape off. Note: Models prior to "-2" suffix had transformer wired directly to potentiometer. To disconnect the transformer, remove the back plate of the actuator, disconnect, and tape the transformer lead.

MP-4xxx Series

			Power Requirements		Output Shaft					ā	
Model No.	Application	Solid State Drive CP-9301 CP-9302	Volts	Hz	Amps	Torque lbin. (N-m)	Timing Seconds (No Load)	Degrees of Rotation	Spring Return	Aux. Switch	Built-in Transforme
MP5-4751	Proportional	Available	240	50	0.25	50 (5.6)	108	180 (non-Adj.)	CCW	SPDT	Yes

a - Units with a "-2" suffix, e.g. MP-xxxx-xxx2-x, include a built-in transformer (used for Microtherm or with AE-504) with secondary loads wired externally to terminals seven and eight of the actuator. Red (24 Vac) to terminal eight and Blue (12 Vac) to terminal seven. When these actuators are used with controllers other than Microtherm or AE-504, disconnect the Red and Blue leads and tape off. Note: Models prior to "-2" suffix had transformer wired directly to potentiometer. To disconnect the transformer, remove the back plate of the actuator, disconnect, and tape the transformer leads.



b - Rotation adjustable 45 to 320°. Caution: On actuators with proportional input signals changing the rotation will affect the control, since the internal feedback potentiometer's travel is fixed.

MP-9xxx Series Reversible and Proportional Electronic Actuators

Reversible and Proportional Electric Actuators

These actuators provide control of heavy dampers, large valves, and other high torque applications in heating, ventilating, air conditioning, and similar applications which do not require return to a normal position.

Features

- High torque proportional gear train actuators accept the following signals:
 - 100 to 1,000 slidewire (requires AE-504).
 - SPDT floating or snap-acting controller.
 - Variable Vdc.
 - Variable mAdc.
- Torque to 1,600 lb-in.
- Available in 120 Vac models.
- · Standard SPDT auxiliary switch.
- Rugged die cast aluminum housings.
- Oil immersed motor and gear train.

Specifications	
Control circuit	Requires SPDT switch with neutral (floating) or two-position and proportional
Shaft Rotation	Reversible proportional can stop at any point in the stroke
Auxiliary switch	Adjustable SPDT snap-acting Factory set to close one contact and open the other at end of CW stroke.
Environment Shipping and storage Operating Humidity	-40 to 130°F (-40 to 54°C) -40 to 130°F (-40 to 54°C) 5 to 95% RH
Locations	NEMA Type 1 (NEMA 4 with AM-369)
Connections	Coded screw terminals
Case	Die cast aluminum with two 1/2 in.conduit knock-outs on each side
Mounting Dampers Valves	Upright preferred Upright with actuator above the center line of the valve body
Dimensions	9-9/16 H x 9-1/2 W x 10-1/2 D in. (243 x 241 x 267 mm)
Agency Listing	MP-9750 only UL Listed

0 , 0	•
Installation Instructions	F-11331

Model Table


	Control						
Model No.	Type	Amp Rating	Input	Torque Lb-in.a	Timing Sec.	Stroke	Misc.
MP-9750b	1, 2	0.9 at 120 Vac	120 Vac, 60 Hz, 0.9 A	800	135	180	Built-in Trans.c
MP-9810				1300	115	180	
MP-9830	3. 4	1.8 at 120 Vac	120 Vac. 60 Hz. 1.8 A	1300	60	90	_
MP-9910] 5,4	1.0 at 120 vac	120 Vac, 00112, 1.0 A	1600	145	180	

- a 1 lb-in. = 0.113 N-m.
- b U Listed.
- c Note: MP-9750-xxx-2-x includes a built-in transformer with secondary leads wired externally to terminals 7 and 8 Red (24 Vac) to 8 and Blue (12 Vac) to 7.

Compatible Actuators

Actuators	Actuator Drives Input Type						
Actuators	Vdc	mA	Vdc/mA	mA/Vdc			
Actuator Model	CP-8301-xxxa	CP-8391-716a	CP-9301	CP-9302			
MP-9750	X		X	Х			
MP-9810							
MP-9830		X					
MP-9910			_	_			

a May require close nipple conduit extensions for mounting x-6680.







CP-8301 2 to 15 VDC Electronic Actuator Drive

2-15 Vdc Input Electronic Actuator Drive

The CP-8301-xxx Series electronic actuator drive is designed to process a variable 2 to 15 Vdc signal from a controller to provide proportional control of an electric gear train actuator.

Features

- · Mounts directly onto proportional, electric, gear train actuators.
- 24 and 120 Vac models available.
- · Color-coded pigtail leads.

Sp	eci	tica	tio	ns

Inputs Control signal Range Span, Start point Power requirements Power supplies

2 to 15 Vdc Refer to Model Table Refer to Model Table Refer to Model Table

Outputs
Connections
Mounting
Case

Color coded pigtail leads. Directly to an actuator Bakelite

Connections

Adjustable SPDT snap-acting Factory set to close one contact and open the other at end of CW stroke.

Environment

Shipping and storage Operating Humidity -40 to 140°F (-40 to 60°C) -40 to 140°F (-40 to 60°C) 5 to 95% RH, non-condensing

Locations

Dimensions

NEMA Type 1 4 H x 4 W x 3-1/4 D in.

(102 x 102 x 83 mm)

Agency Listing UL

CSA

File #E9429 Category Temperature-Indicating and Regulating Equipment C22.2 No. 24-93

Installation Instructions F-14940

Model Table


Model No.	Power Requirement Vac, 4.8 VA 50/60 Hz (+10/-15%)	Power Supply ^a	Start Point of Actuator	Span
CP-8301-024	24	20 Vdc, 50 mA regulated	Adjustable from 2 to 12 Vdc	Fixed at 3 Vdc for full
CP-8301-120	120	and filtered.	input. Factory set at 6 Vdc.	actuator stroke.

a - The power supply must not be connected to +20 (red) of other supplies.

Compatible Actuators

Actuator Series	Power		Torq	ue	Otrodo Domoso	
	Vac 60 Hz	Amp	Lb-in.	N-m	Stroke Degrees	Spring Return
MP-2113-500		2.2				_
MP-361			50	5.6		CW
MP-371	24	2.5	30	3.0		CCW
MP-381	24	2.3	220	24.9		_
MP-465 a			50	F.0	180	CW
MP-475 a			50	5.6		CCW
MP-483 a					90	
MP-485 a		0.5	220	24.9		
MP-486 a	120		220	24.9		_
MP-495 a		0.95	450	50.8	180	
MP-9750 a	120	0.9			100	

a - CAUTION: Remove red and blue transformer wires from terminals 7 and 8 of actuator and tape.







CP-8391-716 Series 4 to 20 mA Electronic Actuator Drive

The CP-8391-716 Series electronic actuator drive is designed to process a variable 4 to 20 mAdc signal from a controller to provide proportional control of an electric gear train actuator.

- Mounts directly onto proportional, electric, gear train actuators.
- 4 to 20 mAdc operating range. with 250 impedance with field adjustable ranges of 2 through 7, 2 through 12, 7 through 12, 4 through 12, and 12 through 20 mAdc.
- 120 Vac applications.
- Color-coded pigtail leads.

Specifications	
Inputs Control signal	
Range	4 to 20 mAdc, non-adjustable
Span	Adjustable 4 to 16 mAdc
Start point	Adjustable from 2 to 16 mAdc
Impedance	250 Ω
Grounding	Either input wire can be grounded and will not cause damage
Hysteresis	provided the electric gear train actuator is ungrounded 3 to 5% of 16 mAdc span, nonadjustable
Hysteresis	(Hysteresis is the difference in input signal between that signal
	which will drive the actuator shaft one way and the signal which will drive it the other way)
Power requirements	120 Vac ±10%, fixed input signal offset ±1% maximum
Power consumption	3.5 Va.
Linearity	0.15% of actuator rotation
Outputs	To control windings of gear train actuators, see "Typical Actuators"
Connections	Color coded pigtail leads
Mounting	Directly to an actuator. The upright position is preferred, but other positions are acceptable
Case	Bakelite
Environment	
Shipping and storage	-40 to 140°F (-40 to 60°C)
Operating	-13 to 140°F (-25 to 60°C)
Humidity	5 to 95% RH, non-condensing
Vibration	1G maximum in any plane
Dimensions	4 H x 4 W x 3-1/4 D in.
	(102 x 102 x 83 mm)
Agency Listing	UL Recognized
Installation Instructions	F-21220

Com	ınat	ihle	· Δcti	uators

Actuator Series	Pow	er	Tor	que	Stroke	Spring Return
Actuator Series	Vac 60 Hz	Amp	Lb-in.	N-m	Degrees	Spring Return
MP-2130-500 ^{a b}		0.5	50	5.6	90	
MP-2150-500 a b		0.5	50	0.0	180	
MP-465ab			50	5.6		CW
MP-475 ^{ab}			50	5.0	90	CCW
MP-483 ab					90	
MP-485 ab		0.5	220	24.9		
MP-486 ab			220	20		
MP-495 a b		0.95	450	50.8	180	
MP-9750 ab	120	0.9	800 ^	ctu ⁹⁰ atc	re mu	st except an
MP-9830°		1.8				
MP-9910°		1.0	1600 C	ptiona	l positi	ve pilot posi-

a CAUTION: Remove red and blue transformer wires from terminals 7 and 3 of actuator and tape. b CP-9302 drive may be an alternative solution. c NOTE: Some MP-9xxx will require two X6880 mounting extensions.





CP-8391-913 Series Electronic Actuator Drive

The CP-8391-913 electronic actuator drive is designed to process a variable 4 to 20 mAdc signal from a controller to provide proportional control of an electric gear train actuator.

Features

- Mounts directly onto proportional, electric, gear train actuators.
- Fixed 4 to 20 mAdc operating range with 250Ω impedance.
- 24 and 120 Vac models available.
- Color-coded pigtail leads.

Specifications	
Inputs Control signal	
Range	4 to 20 mAdc, non-adjustable
Span	16 mAdc
Start point	4 mAdc 250 O
Impedance Grounding	Either input wire can be grounded and will not cause damage,
Grounding	provided the electric gear train actuator is ungrounded
Hysteresis	6 to 9% of 16 mAdc span, nonadjustable
11901010010	(Hysteresis is the difference in input signal between that signal
	which will drive the actuator shaft one way and the signal which will drive it the other way)
Power requirements	Refer to Model Table
Power consumption	Refer to Model Table
Linearity	0.15% of 16 mAdc span
Outputs	To control windings of gear train actuators, see "Typical Actuators"
Connections	Color coded pigtail leads
Mounting	Directly to an actuator. The upright position is preferred, but other positions are acceptable
Case	Bakelite
Environment	
Shipping and storage	-40 to 140°F (-40 to 60°C)
Operating	-40 to 140°F (-40 to 60°C)
Humidity	5 to 95% RH, non-condensing
Vibration	1G maximum in any plane
Agency Listing	
UL 873	File #E9429 Category Temperature-Indicating and Regulating Equipment
CSA	C22.2 No. 24-93
Installation Instructions	F-22453




Model No.	Power Requirement Vac, 50/60 Hz (+10/- 15%)	Power Consumption	Start Point of Actuator	Span
CP-8391-913	24	4.8 VA	Factory set at 4 mAdc non-adjustable.	Fixed at 16 mAdc for full actuator stroke.

Compatible Actuators

Actuator Series	Power		To	rque	Stroke	Outside to District
Actuator Series	Vac 60 Hz	Amp	Lb-in.	N-m	Degrees	Spring Return
MP-2113-500°		2.2				-
MP-361 ^a	0.4		50	5.6		CW
MP-371 ^a	24	2.5		5.0	180	CCW
MP-381 ^a		2.5	220	24.9	100	-
MP-465 ab			50	F. C.		CW
MP-475 ab			50	5.6		CCW
MP-483 ab	120				90	
MP-485 ab	120	0.5	220	24.9		
MP-486 ab			24.9	100		
MP-495 ab		0.95	450	50.8	180	-
MP-9750 a	120	0.9	800	90		

a - CP-9301 may be an alternative solution.





b - CAUTION: Remove red and blue transformer wires from terminals 7 and 8 of actuator and tape.

CP-9301 Series Electronic Actuator Drive

The CP-9301 and CP-9302 electronic actuator drives process a variable input signal from a controller to provide proportional control of an electric gear train actuator. The CP-9301 is preset at the factory for voltage input. The CP-9302 is factory preset for current input and has additional wiring for connection to an override switch, for those applications requiring an external override of the input signal. These drives are equipped with built-in jumpers and adjustable potentiometers, so that the type of input signal, deadband, input span, and start point may be reset in the field when necessary.

Features

- Mounts directly onto proportional, electric, gear train actuators.
- Power is supplied directly from the actuator.
- Jumpers for selecting either voltage or current input, as well as 3% or 5% deadband.
- Adjustable span and start point potentiometers.

Specifications	
Mounting	Directly to an actuator. The drive may be mounted on either the left or right side of the actuator, in a conduit opening adjacent to the low voltage wiring compartment.
Case	Injection molded plastic with stamped aluminum cover
Inputs Control signal Span Start point Impedance Voltage Input Current Input	Refer to Model Table Refer to Model Table Greater than 10,000 Ω 250 Ο
Power supply	Power shall be supplied directly from the shading coil windings provided on the shaded pole reversible motor of the gear train actuator (less than 30 Vac)
Outputs Connections Shading Coil Triac Output	Color-coded leads with crimped screw terminal connectors Purge override (input signal override) leads are color-coded pigtails 1.2 A RMS
Deadband	Refer to Model Table
Connections	Color coded pigtail leads
Environment Shipping and storage Operating Humidity	-40 to 160°F (-40 to 71°C) -40 to 136°F (-40 to 58°C) 5 to 95% RH, non-condensing
Locations	NEMA Type 4; IEC IP56.
Agency Listing UL 873 CUL European community	File #E9429 Category Temperature-Indicating and Regulating Equipment C22.2 No. 24-93 EMC Directive 89/336/EEC
Installation Instructions	F-26563



Model Table

Part Number	Input Signal	Factory Jumper Settings				Jumper Settings		Potentiometer Adjustment Ranges	
Part Number	Override	Input Signal	Deadband	Start Point	Input Span	Input Signal	Deadband	Input Span	Start Point
CP-9301	Not Available	Voltage (6 to 9 Vdc)		6 Vdc	3 Vdc				
CP-9301-456	Not Available	Voltage (0 to 10 Vdc)	3% of Input Span	0 Vdc	10 Vdc	Voltage	20/ or E0/ of	3.0 to 16.5	0 to 10 Vdc
CP-9302	Available (Use					or	3% or 5% of Input Span	Vdc or 8 to 16	or 2 to 16
CP-9302-702	is Optional)	Current (4 to 20 mAdc)	5% of Input Span	4 mAdc	(:urrent ' '		mAdc	mAdc	

Compatible Actuators

	Power		Torque		0	0 . 0 .		
Actuator Series	Vac 60 Hz	Amp	Lb-in.	N-m	Stroke Degrees	Spring Return	Internal Transformers	
MP-2113-500	24	2.2	50	5.6	180	-	No	
MP-361	24	2.5	50	5.6	180	CW	No	
MP-371	24	2.5	50	5.6	180	CCW	No	
MP-381	24	2.5	220	24.9	180	-	No	
MP-465	120	0.5	50	5.6	180	CW	Yes	
MP-475	120	0.5	50	5.6	180	CCW	No	
MP-483	120	0.5	220	24.9	90	-	Yes	
MP-485	120	0.5	220	24.9	180	-	Yes	
MP-495	120	0.95	450	50.8	180	-	Yes	
MP-9750	120	0.9	800	90.3	180	-	Yes	

a - Units with a "-2" suffix, e.g. MP-xxxx-xxx-2-x, include a built-in transformer (used for Microtherm @ or with AE-504) with secondary leads wired externally to terminals 7 (Blue, 12 Vac) and 8 (Red, Vac) of the actuator.

wired externally to terminals / (Blue, 12 Vac) and 8 (Red, Vac) of the actuator. Caution: When using the CP-9301 or CP-9302 with actuators containing an internal transformer, disconnect and tape off the red and blue leads before installing and powering the device. Failure to do so can result in damage to the actuator drive.

Note: Models prior to "-2" suffix had transformer

Note: Models prior to "-2" suffix had transformer wired directly to potentiometer. To disconnect the transformer, remove the back plate of the actuator, then disconnect and tape the transformer leads.



Globe Valves and Actuators

Overview VB-7000 Series Globe Valves

2-Way and 3-Way Globe Valves

The Venta VB-7200 Series ½" to 2" 2-way globe valves feature the industry's most high-performing, energy-efficient control valves for chilled water, hot water, and steam applications. The Venta VB-7300 Series ½" to 2" 3-way globe valves provide efficient control for chilled and hot water applications. Units have a patented precision plug for high rangeability, providing efficient heat transfer over a broad range of HVAC applications. The Venta seal design provides tight close-off to ensure energy efficiency and provides a high tolerance to high differential pressures.

Venta globe valves are used for Two-position, floating, or proportional control applications. Valve assemblies may be purchased from the factory or purchased separately, requiring a linked actuator.

Features

- High rangeability provides fine, accurate control for more efficient, responsive, and comfortable regulation.
- · Tight sealing with ultra-low energy leakage on shutoff for energy conservation with soft seating
- High differential-pressure rating of up to 87 psi for reliable operation in demanding applications
- Very low Cv models (as low as 0.1) for precise control of small and light-load applications
- Multiple Cv and fitting choices to match loads and piping
- RoHS compliant product is environmentally friendly and meets ANSI, PED, CRN and other standards
- Stroke positions are suitable for all Schneider Electric actuators.
- Stem strength exceeds:
 - 600 lb. force on 2-way and mixing valves
 - 300 lb. force on diverting valves



DANGER: Do not use these valves for combustible gas applications. They are not rated for combustible applications; use in these applications could result in gas leaks and explosions.

More information

F-26752

Valve Size	VB-7000 (2-way NC, 2-way NO, 3-way mixing, 3-way diverting)	VB-8xxx (2-way NC, 2-way NO, 3-way Diverting/mix-ing)	VB-9313 (3-way mixing)
1/2"	•		
3/4"	•		
1"	•		
1-1/4"	•		
1-1/2"	•		
2"	•		
2½"		•	•
3"		•	•
4"		•	•
5"		•	•
6"		•	•







Venta VB-7200 Series 2-way globe valves



Venta VB-7300 Series 3-way globe valves




Ordering VB-7000 Series Globe Valves

To determine the valve actuator assembly part number, specify the following six part number fields.

1) Control signal	2) Trim and valve configuration	3) Pipe end connections	4) Actuator or linkage	5) Pattern code	6) Port code Cv value
VB_	-			_	-
	Refer to the guide below.				For water, steam, glycol and similar non flammable, non toxic fluids, choose based on the valve size and selection chart on page 70.

Ordering VB-7000 Series Valves

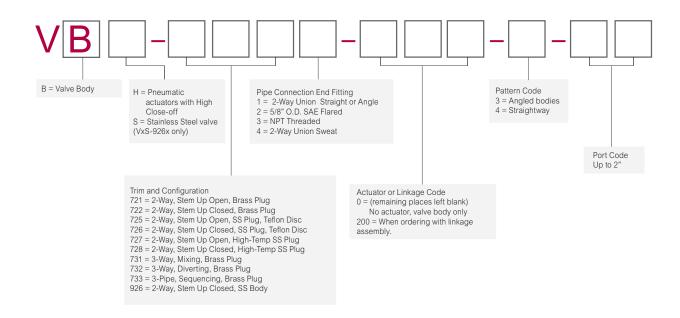

2-Way Brass Trim Valves with Soft Seats

Threaded NPT Threaded NPT

2-Way Brass Trim

Series p	oart numb	oer		VB-7213-0-4-	VB-7223-0-4-				
Pipe siz	zes			½" to 2"					
Stem ad	ction			Up open	Up open Up closed				
ANSI pressure class				250 psi (up to 400 psi below 150°F)				
ANSI se	eat leakaç	ge°		Designed to ANSI V with ANSI IV a Long term seat leakage dependen maintenance of the system					
Control	media ar	nd temp	erature	20 to 281°F (-7 to 138°C) water (up low pressure, saturated, treated ste					
Flow cu	irve			Modified equal percentage					
Allowab	ole ΔP for	waterb		87 psi (600 kPa) Max. for normal life	e ^a				
	let pressued steam	ıre,		35 psi (240 kPa)	35 psi (240 kPa)				
	Max ΔP for sizing, saturated steam ^b			80% of inlet pressure up to 15 psig and 42% of absolute (gage pressure plus 14.7) inlet pressure above 15 psig inlet					
	at close- ed steam			Inlet pressure (35 psi) (actuator must be rated to provide close-off pressure)					
Size	Cv	Kvs	Rangeability greater than	Valve body part numbers					
	0.4	0.3		VB-7213-0-4-01	VB-7223-0-4-01				
4 / 11	1.3	1.1		VB-7213-0-4-02	VB-7223-0-4-02				
1/2"	2.2	1.9		VB-7213-0-4-03	VB-7223-0-4-03				
	4.4	3.8		VB-7213-0-4-04	VB-7223-0-4-04				
3/11	5.5	4.8		VB-7213-0-4-05	VB-7223-0-4-05				
3/4"	7.5	6.5	100:1	VB-7213-0-4-06	VB-7223-0-4-06				
1"	10	8.7		VB-7213-0-4-07	VB-7223-0-4-07				
T"	14	12.1		VB-7213-0-4-08	VB-7223-0-4-08				
11/4"	20	17.3		VB-7213-0-4-09	VB-7223-0-4-09				
1½"	28	24.2		VB-7213-0-4-10	VB-7223-0-4-10				
2"	40	34.6		VB-7213-0-4-11	VB-7223-0-4-11				

a - To minimize noise, ensure the flow rate in the piping is less than 10 ft (3m) / second and the differential pressure is less than 35 psi (241 kPa). Operating with differential pressures above 35 psi may result in additional noise but is acceptable up to 87 psi (600 kPa). Operating within the cavitation zone may result in



noise and internal valve damage.
b - Maximum recommended differential pressure in open position. Do not exceed recommended differential pressure (pressure drop), as integrity of parts may be affected. c - Refer to Seat Leakage Classes table.

2-Way Stainless Trim Valves with Soft Seats

Threaded NPT

2-Way Stainless Trim (soft seats)



Series p	art num	ber		VB-7253-0-4-	VB-7263-0-4-
Pipe siz	es			½" to 2"	½" to 2"
Stem action				Up open	Up closed
ANSI pr	essure c	lass		250 psi (up to 400 ps	si below 150°F)
ANSI se	at leaka	ge ^c			with ANSI IV above 35 psi (241 kPa) close off. Long ependent on proper water conditioning mainte-
Control	media a	nd temp	perature	20 to 340°F (-7 to 17 pressure, treated ste	1°C) water (up to 60% glycol/water solution), low am
Flow cu	rve			Modified Linear	
Allowab	le ΔP for	water ^b		87 psi (600 kPa) Max	κ. for normal life ^a
Max. inl	et press	ure, sat	urated steam	100 psi (690 kPa)	
Мах ДР	for sizin	g, satur	rated steam ^b	80% of inlet pressure sure plus 14.7) inlet	e up to 15 psig and 42% of absolute (gauge prespressure above 15 psig inlet
	at close d steam			Inlet pressure (100 p pressure)	si) (actuator must be rated to provide close-off
Size	Cv	Kvs	Rangeability greater than		Valve body part numbers
	0.1	0.09	13:1	-	VB-7263-0-4-31
	0.22	0.2	18:1	-	VB-7263-0-4-33
	0.4	0.3		VB-7253-0-4-01	VB-7263-0-4-01
	0.75	0.6		-	VB-7263-0-4-34
	1.0	0.9		-	VB-7263-0-4-36
1/2"	1.3	1.1		VB-7253-0-4-02	VB-7263-0-4-02
	1.8	1.6		-	VB-7263-0-4-28
	2.2	1.9		VB-7253-0-4-03	VB-7263-0-4-03
	2.9	2.5		-	VB-7263-0-4-30
	3.25	2.8		-	VB-7263-0-4-39
	4.4	3.8		VB-7253-0-4-04	VB-7263-0-4-04
	5.5	4.8		VB-7253-0-4-05	VB-7263-0-4-05
3/4"	6.3	5.4		-	VB-7263-0-4-41
	7.5	6.5		VB-7253-0-4-06	VB-7263-0-4-06
	8.2	7.1	100:1	-	VB-7263-0-4-51
1"	9.0	7.8	100:1	-	VB-7263-0-4-52
I	10	8.7		VB-7253-0-4-07	VB-7263-0-4-07
	12	10.4		VB-7253-0-4-08	VB-7263-0-4-08
	14	12.1		-	VB-7263-0-4-61
11/"	16	13.8		-	VB-7263-0-4-62
1¼"	18	15.6		-	VB-7263-0-4-63
	20	17.3		VB-7253-0-4-09	VB-7263-0-4-09
	22	19.0		-	VB-7263-0-4-71
1½"	24	20.8		-	VB-7263-0-4-72
1 /2	28	24.2		VB-7253-0-4-10	VB-7263-0-4-10
	31	26.8		-	VB-7263-0-4-81
2"	34	29.4		-	VB-7263-0-4-82
	40	34.6		VB-7253-0-4-11	VB-7263-0-4-11

a - To minimize noise, ensure the flow rate in the piping is less than 10 ft (3m)/second and the differential pressure is less than 35 psi (241 kPa). Operating with differential pressures above 35 psi may result in additional noise but is acceptable up to 87 psi (600 kPa). Operating within the cavitation zone may result in noise and internal valve damage.




b - Maximum recommended differential pressure in open position. Do not exceed recommended differential pressure (pressure drop), as integrity of parts may be affected. Exceeding maximum recommended differential pressure voids product warranty. c - Refer to Seat Leakage Classes table.

2-Way Stainless Trim Valves with Metal Seats Stainless Steel Trim with Metal to Metal Seats

Threaded NPT

2-Way Stainless Trim (Metal to Metal)



Series part number		VB-7273-0-4-	VB-7283-0-4-				
Pipe sizes				½" to 2"	½" to 2"		
Stem ac	ction			Up open	Up closed		
ANSI pr	essure cla	ass		250 psi (up to 400 ps	ig below 150°F)		
ANSI se	eat leakag	ec		ANSI III			
Control	media an	d temper	ature	20 to 400°F (-7 to 204 low pressure, treated	°C) water (up to 60% glycol/water solution), steam		
Flow cu	irve			Modified linear			
Allowab	ole ΔP for v	waterb		87 psi (600 kPa) max	for normal life ^a		
Max inle	et pressur	e, satura	ted steam	150 psi (1034 kPa)			
Max ΔP saturate	for sizing	,		14.7)	80% of inlet pressure up to 15 psig and 42% of absolute (gauge pressure plus 14.7) inlet pressure above 15 psig inlet		
	at close-o	off,		Inlet pressure (150 ps	Inlet pressure (150 psi) (actuator must be rated to provide close-off pressure)		
Size	Cv	Kvs	Rangeability	Valve body part number	ers		
	0.4	0.3	5:1	VB-7273-0-4-01	VB-7283-0-4-01		
1/2"	1.3	1.1	15:1	VB-7273-0-4-02	VB-7283-0-4-02		
/2	2.2	1.9	25:1	VB-7273-0-4-03	VB-7283-0-4-03		
	4.4	3.8	40:1	VB-7273-0-4-04	VB-7283-0-4-04		
3/4"	5.5	4.8	50:1	VB-7273-0-4-05	VB-7283-0-4-05		
7/4	7.5	6.5	60:1	VB-7273-0-4-06	VB-7283-0-4-06		
1"	10	8.7	60:1	VB-7273-0-4-07	VB-7283-0-4-07		
1	12	10.4		VB-7273-0-4-08	VB-7283-0-4-08		
11/4"	20	17.3	75:1	VB-7273-0-4-09	VB-7283-0-4-09		
1½"	28	24.2	75.1	VB-7273-0-4-10	VB-7283-0-4-10		
		34.6		VB-7273-0-4-11	VB-7283-0-4-11		

a - To minimize noise, ensure the flow rate in the piping is less than 10 ft (3m) / second and the differential pressure is less than 35 psi (241 kPa). Operating with differential pressures above 35 psi may result in additional noise but is acceptable up to 87 psi (600 kPa). Operating within the cavitation zone may result in noise and internal valve damage.
b - Maximum recommended differential pressure in open position. Do not exceed recommended differential pressure (pressure drop), as integrity of

For more information, see:

F-26752



parts may be affected. Exceeding maximum recommended differential pressure voids product warranty. c - Refer to Seat Leakage Classes table.

VBS-9263 1/2" & 3/4" 2-Way Stainless Valves with Soft Seats 316 Stainless Bodies with Soft Seats

Threaded NPT - 316 Stainless Body



2-Way Stainless Valve and Trim with Soft Seats

Size	Cv	Kvs	Rangeability	Valve body part numbers		
Max ΔP at o	close-off, sa	turated stea	m	Inlet pressure (100 psi) (actuator must be rated to provide close-off pressure) and withstand media temperature		
Max ΔP for sizing, saturated steam				80% of inlet pressure up to 15 psig and 42% of absolute (gauge pressure plus 14.7) inlet pressure above 15 psig inlet - refer to steam characteristics.		
Max inlet p	ressure, sat	urated stear	n	100 psi (690 kPa)		
Allowable 2	∆P for water			35 psi (241 kPa) Max. for normal lifea		
Flow curve				Modified linear		
Control me	dia and tem	perature		20 to 400°F (-7 to 204°C)		
ANSI seat I	eakageb			ANSI IV		
ANSI press	ure class			300 psi (up to 400 psig below 150°F)		
Seats				316 Stainless on PTFE		
Stem action	า			Up closed only		
Pipe sizes				1/2" & 3/4"		
Series part	number			VBS-9263-0-4-xx		

Size	Cv	Kvs	Rangeability	Valve
	0.1	0.087	5:1	VBS-9263-0-4-31
	0.22	0.19	5:1	VBS-9263-0-4-33
	0.3	0.26	5:1	VBS-9263-0-4-34
	0.4	0.3	5:1	VBS-9263-0-4-1
	0.75	0.65	15:1	VBS-9263-0-4-35
1/11	0.95	0.82	15:1	VBS-9263-0-4-36
1/2"	1.3	1.1	15:1	VBS-9263-0-4-2
	1.75	1.5	25:1	VBS-9263-0-4-37
	2.2	1.9	25:1	VBS-9263-0-4-3
	2.8	2.4	35:1	VBS-9263-0-4-38
	3.25	2.8	35:1	VBS-9263-0-4-39
	3.6	3.0	35:1	VBS-9263-0-4-4
	4.3	3.7	40:1	VBS-9263-0-4-45
3/4"	5.0	4.1	40:1	VBS-9263-0-4-5
	6.2	5.0	50:1	VBS-9263-0-4-6

CAUTION:
Pressure reducers do not lower temperatures from boilers significantly. Select only valve actuators that withstand actual pipe temperatures near the boiler output temperature.

a - Operating within the cavitation zone or an operating differential pressure above 35 psi (241 kPa) may result in noise and internal valve damage. b - Refer to Seat Leakage Classes table.

VBS-9263 1/2" & 3/4" 2-Way Stainless Valves with Soft Seats, Union **Brass Trim with Soft Seats - Copper Connection**

Series part number									
Pipe sizes	2-Way Brass Trim Body Type				5/8" OD 41	5° SAE Flared	Unio	Union Sweat	
Pipe sizes	Series	part r	number		VB-7212-0-4-	VB-7222-0-4-	VB-7214-0-4-	VB-7224-0-4-	
ANSI pressure class		•			_				
ANSI seat leakage* ANSI IV Designed to ANSI V with ANSI IV above 35 psi (241 kPa) close off with long term seat leakage dependent on proper water conditioning maintenance of the system. Control media and temperature 20 to 281°F (-7 to 138°C) water (up to 60% glycol/water solution), low pressure, treat steam Flow curve Modified Equal Percentage Allowable ΔP for waterb 35 psi (241 kPa) Max. for normal life* 87 psi (600 kPa) Max. for normal life atteam* Max. inlet pressure, saturated steam* 880% of inlet pressure up to 15 psig and 42% of absolute (gauge pressure plus 14: inlet pressure above 15 psig inlet Max ΔP at close-off, saturated team* Inlet pressure (actuator must be rated to provide close-off pressure) Size V Kvs Rangeability* Valve body part numbers VB-7212-0-4-01 VB-7214-0-4-01° VB-7224-0-4-01° 1.3 1.1 15:1 VB-7212-0-4-01 VB-7222-0-4-01 VB-7214-0-4-02° VB-7224-0-4-02° 4.4 3.8 40:1 VB-7212-0-4-03 VB-7222-0-4-03 VB-7214-0-4-03° VB-7224-0-4-04° 35.5 6.5 60:1 T. 5. 6.5 60:1 T. 10 8.7 60:1 T. 10 8.7 60:1 T. 11 12:1 60:1 T. 12 12:1 60:1 T. 13 17:3 75:1 VB-7214-0-4-08° VB-7224-0-4-08° VB-7214-0-4-08° VB-7224-	Stem	action			Up Open	Up Closed	Up Open	Up Closed	
ANSI seat leakage* ANSI IV 35 pši (241 kPa) close off with long term seat leakage dependent on proper wate conditioning maintenance of the system. Control media and temperature 20 to 281°F (-7 to 138°C) water (up to 60% glycol/water solution), low pressure, treatesteam Flow curve Modified Equal Percentage Allowable ΔP for waterb 35 psi (241 kPa) Max. for normal life® 87 psi (600 kPa) Max. for normal life® 87 psi (600 kPa) Max. for normal life® 87 psi (600 kPa) Max. for normal life® 98 psi (600 kPa) Max. for normal life® 98 psi (600 kPa) Max. for normal life® 99 psi (600 kPa) Max. for nor	ANSI	pressu	re class	S	250 psi (up to 400	psi below 150°F)		'	
Steam Ste					,		35 pši (241 kPa) clo seat leakage depen conditioning	35 psi (241 kPa) close off with long term seat leakage dependent on proper water conditioning	
Allowable ΔP for waterb 35 psi (241 kPa) Max. for normal life ^a 87 psi (600 kPa) Max. for normal lifea Max. inlet pressure, saturated steam ^b 80% of inlet pressure up to 15 psig and 42% of absolute (gauge pressure plus 14. inlet pressure above 15 psig inlet Max ΔP at close-off, saturated steam ^b Inlet pressure (actuator must be rated to provide close-off pressure) Size Cv Kvs Rangeability ^c Valve body part numbers [1.3] 1.1 15:1 VB-7212-0-4-01 VB-7222-0-4-01 VB-7214-0-4-01 ^c VB-7224-0-4-01 ^c [2.2] 1.9 25:1 VB-7212-0-4-02 VB-7222-0-4-02 VB-7214-0-4-02 ^c VB-7224-0-4-03 ^c [4.4] 3.8 40:1 VB-7212-0-4-03 VB-7222-0-4-04 VB-7214-0-4-04 ^c VB-7224-0-4-04 ^c [7.5] 6.5 60:1 [7.5] 6.5 60:1 [1] 10 8.7 60:1 [1] 10 8.7 60:1 [1] 10 8.7 60:1 [1] 10 8.7 55:1 [1] 10 8.7 60:	Contro	ol med	ia and t	emperature	20 to 281°F (-7 to 138°C) water (up to 60% glycol/water solution), low pressure, treated steam				
Max. inlet pressure, saturated steam 35 psi (240 kPa) Max ΔP for sizing, saturated steams 80% of inlet pressure up to 15 psig and 42% of absolute (gauge pressure plus 14.) Max ΔP at close-off, saturated steams Inlet pressure (actuator must be rated to provide close-off pressure) Size Cv Kvs Rangeabilityc Valve body part numbers ½" 1.3 1.1 15:1 VB-7212-0-4-01 VB-7222-0-4-01 VB-7214-0-4-01c VB-7224-0-4-01c ½" 1.3 1.1 15:1 VB-7212-0-4-02 VB-7222-0-4-02 VB-7214-0-4-02c VB-7224-0-4-02c ½" 2.2 1.9 25:1 VB-7212-0-4-03 VB-7222-0-4-03 VB-7214-0-4-03c VB-7224-0-4-03c ¾" 5.5 4.8 50:1 VB-7212-0-4-04 VB-7222-0-4-04 VB-7214-0-4-06c VB-7224-0-4-06c ¾" 5.5 6.5 60:1 VB-7214-0-4-06c VB-7224-0-4-06c ½" 10 8.7 60:1 VB-7214-0-4-09cd VB-7224-0-4-09cd ½" 20 17.3 75:1 VB-7214-0-4-09cd VB-7224-0-4-09cd	Flow	curve			Modified Equal Percentage				
Solid Section Solid Secti	Allowa	able ΔF	for wa	terb	35 psi (241 kPa) N	lax. for normal life ^a	87 psi (600 kPa) Ma	x. for normal lifea	
Max ΔP at close-off, saturated steam Inlet pressure above 15 psig inlet			essure,	saturated	35 psi (240 kPa)				
Size Cv Kvs Rangeability Valve body part numbers	Max Δ	P for s	sizing, s	aturated steam ^b	80% of inlet pressure up to 15 psig and 42% of absolute (gauge pressure plus 14.7) inlet pressure above 15 psig inlet				
1.3			ose-off,	saturated	Inlet pressure (actuator must be rated to provide close-off pressure)				
1.3 1.1 15:1 VB-7212-0-4-02 VB-7222-0-4-02 VB-7214-0-4-02° VB-7224-0-4-02° 2.2 1.9 25:1 VB-7212-0-4-03 VB-7222-0-4-03 VB-7214-0-4-03° VB-7224-0-4-03° 4.4 3.8 40:1 VB-7212-0-4-04 VB-7222-0-4-04 VB-7214-0-4-04° VB-7224-0-4-04° 3/" 5.5 4.8 50:1 7.5 6.5 60:1 VB-7214-0-4-06° VB-7224-0-4-06° 1" 10 8.7 60:1 14 12.1 60:1 VB-7214-0-4-08° VB-7224-0-4-08° 1½" 20 17.3 75:1 1½" 28 24.2 75:1	Size	Cv	Kvs	Rangeability	Valve body part nu	mbers			
2.2 1.9 25:1 VB-7212-0-4-03 VB-7222-0-4-03 VB-7214-0-4-03° VB-7224-0-4-03° 4.4 3.8 40:1 VB-7212-0-4-04 VB-7222-0-4-04 VB-7214-0-4-04° VB-7224-0-4-04° 5.5 4.8 50:1 VB-7214-0-4-05° VB-7224-0-4-05° 7.5 6.5 60:1 VB-7214-0-4-06° VB-7224-0-4-06° 10 8.7 60:1 VB-7214-0-4-06° VB-7224-0-4-06° 14 12.1 60:1 VB-7214-0-4-08° VB-7224-0-4-08° 1½" 28 24.2 75:1 VB-7214-0-4-10° VB-7224-0-4-10° VB-7214-0-4-09° VB-7224-0-4-09° VB-7214-0-4-10° VB-7224-0-4-10°				***	VB-7212-0-4-01		VB-7214-0-4-01°	VB-7224-0-4-01°	
2.2 1.9 25:1 VB-7212-0-4-03 VB-7222-0-4-03 VB-7214-0-4-03° VB-7224-0-4-03° VB-7224-0-4-03° VB-7224-0-4-03° VB-7224-0-4-04° VB-7224-0-4-04° VB-7224-0-4-04° VB-7224-0-4-04° VB-7224-0-4-05° VB-7214-0-4-05° VB-7224-0-4-05° VB-7224-0-4-06° VB-7224-0-4	1/2"								
3/4" 5.5 4.8 50:1 7.5 6.5 60:1 1" 10 8.7 60:1 1" 12.1 60:1 14 12.1 60:1 1/4" 20 17.3 75:1 1/2" 28 24.2 75:1 VB-7214-0-4-10cd VB-7224-0-4-10cd VB-7214-0-4-10cd VB-7224-0-4-10cd	_		-	-					
3/4" 7.5 6.5 60:1 1" 10 8.7 60:1 1" 10 8.7 60:1 1" VB-7214-0-4-07cd VB-7224-0-4-07cd VB-7214-0-4-08cd VB-7224-0-4-08cd VB-7214-0-4-09cd VB-7224-0-4-09cd VB-7214-0-4-09cd VB-7224-0-4-09cd VB-7214-0-4-10cd VB-7224-0-4-10cd				1011	VB-7212-0-4-04	VB-7222-0-4-04			
1" 10 8.7 60:1 14 12.1 60:1 1¼" 20 17.3 75:1 1½" 28 24.2 75:1 VB-7214-0-4-10cd VB-7224-0-4-10cd VB-7214-0-4-10cd VB-7224-0-4-10cd	3/4"		-						
1" 14 12.1 60:1	7.5	_			-				
1¼" 20 17.3 75:1 1½" 28 24.2 75:1 VB-7214-0-4-10cd VB-7224-0-4-10cd VB-7214-0-4-10cd VB-7224-0-4-10cd	1"				-				
1½" 28 24.2 75:1 VB-7214-0-4-10 ^{cd} VB-7224-0-4-10 ^{cd}	11/"								
2" 40 34.6 75:1 VB-7214-0-4-11 ^{cd} VB-7224-0-4-11 ^{cd}	1½"	28	24.2	/5:1			VB-7214-0-4-10 ^{cd}	VB-7224-0-4-10 ^{cd}	
	2"	40	34.6	75:1			VB-7214-0-4-11 ^{cd}	VB-7224-0-4-11 ^{cd}	

a - To minimize noise, ensure the flow rate in the piping is less than 10 ft (3m) / second and the differential pressure is less than 35 psi (241 kPa). Operating with differential pressures above 35 psi may result in additional noise but is acceptable up to 87 psi (600 kPa). Operating within the cavitation zone may result in noise and internal valve damage.

For more information, see:

F-26752



b - Maximum recommended differential pressure in open position. Do not exceed recommended differential pressure (pressure drop), as integrity of parts may be affected. Exceeding maximum recommended differential pressure voids product warranty.

c - The VB-7214-0-4- and VB-7224-0-4- ½* to 2* series valves all have rangeabilities greater than 100:1. d - These part numbers do not have RoHs compliant nuts and tail pieces.

e - Refer to Seat Leakage Classes table.

2-Way Brass Trim Valves with Soft Seats, Union Brass Trim Soft Seat Union for Radiators and Other **Applications**

				Union Angle NPT	Union Straight NPT	Union Straight NPT		
2-Way Brass Trim Body Type			/pe					
Series	part nur	nber		VB-7211-0-3-	VB-7211-0-4-	VB-7221-0-4-		
Pipe si	zes			½" to 1¼"	1			
Stem a	ction			Up Open	Up Open	Up Closed		
ANSI p	ressure	class		250 psi (up to 400 ps	sig below 150°F)			
ANSI s	eat leak	agee		Class IV Designed to ANSI V with ANSI IV above 35 psi (241 kPa) close off with long term seat leakage dependent on proper water conditioning maintenance of the system.				
Contro	l media	and ten	nperature	20 to 281°F (-7 to 138°C) water (up to 60% glycol/water solution), low pressure, treated steam				
Flow cu	ırve			Modified Equal Percentage				
Allowal	ole ΔP fo	or water	rb	35 psi (241 kPa) Max, for normal life ^a	87 psi (600 kPa) Max.	for normal life ^a		
Max inl	et press	sure for	saturated	35 psi (240 kPa)				
Max ΔF	for sizi	ng, satı	urated steam ^b	80% of inlet pressure up to 15 psig and 42% of absolute (gauge pressure plus 14.7) inlet pressure above 15 psig inlet				
Max ΔF	at clos	e-off, sa	aturated steam ^b	Inlet pressure (35 psi) (actuator must be rated to provide close-off pressure)				
Size	Cv	Kvs	Rangeability Greater Than ^c	Valve body part numbers				
	0.4	0.3	5:1	VB-7211-0-3-01	VB-7211-0-4-01°	VB-7221-0-4-01°		
	1.3	1.1	15:1	VB-7211-0-3-02	VB-7211-0-4-02°	VB-7221-0-4-02°		
1/2"	2.2	1.9	25:1	VB-7211-0-3-03	VB-7211-0-4-03°	VB-7221-0-4-03°		
	4.4	3.8	40:1	_	VB-7211-0-4-04°	VB-7221-0-4-04°		
	5.0	4.3	40:1	VB-7211-0-3-04	-	_		
	5.5	4.8	50:1	VB-7211-0-3-05	VB-7211-0-4-05°	VB-7221-0-4-05°		
3/4"	7.5	6.5	60:1	-	VB-7211-0-4-06°	VB-7221-0-4-06°		
	8.5	7.4	50:1	VB-7211-0-3-06	-	_		
	10	8.7	60:1	_	VB-7211-0-4-07°	VB-7221-0-4-07°		
1"	14	12.1	60:1	VB-7211-0-3-07	VB-7211-0-4-08°	VB-7221-0-4-08°		
	16	13.8	75:1	VB-7211-0-3-08	-	_		
11/4"	20	17.3	75:1	_	VB-7211-0-4-09°	VB-7221-0-4-09°		
1 /4	22	19	75:1	VB-7211-0-3-09	_	_		

a - To minimize noise, ensure the flow rate in the piping is less than 10 ft (3m) / second and the differential pressure is less than 35 psi (241 kPa). Operating with differential pressures above 35 psi may result in additional noise but is acceptable up to 87 psi (600 kPa). Operating within the cavitation zone may result in noise and internal valve damage.



b - Maximum recommended differential pressure in open position. Do not exceed recommended differential pressure (pressure drop), as integrity of parts may be affected. Exceeding maximum recommended differential pressure voids product warranty.

c - The VB-7211-0-4-xx and VB-7221-0-4-xx series valves all have rangeabilities greater than 100:1. e - Refer to Seat Leakage Classes table.

3-Way Valves Mixing Valves

			5/8" OD 45° SAE Flared	Threaded NPT	Union Sweat		
3-Way Brass Trim Mixing Valves Body Type ^o							
Series pa		bers	VB-7312-0-4-	VB-7313-0-4-	VB-7314-0-4-		
Pipe size Stem flov			½" I.D.		" to 2"		
ANSI pre		-	Stem up closes A port and opens B port to the common AB port 250 psi (up to 400 psi below 150°F)				
		t leakaged	ANSI Class IIIa	Designed to ANSI V with ANSI IV above 35 psi (241 kPa) close off with long term seat leakage dependent on proper water conditioning maintenance of the system			
ANSI B p	ort sea	t leakaged	ANSI Class III				
		nd temperature	20 to 281°F (-7 to 138°C) water (up to 60% glycol/water solution)				
Water flo		9	Modified linear				
Allowable for water	ΔΡ		35 psi (241 kPa)ª	87 psi (600 kPa) Max. for normal lifeª			
Size	Cv	Kvs		Valve body part numbers			
1/2"	2.2	1.9	VB-7312-0-4-02	VB-7313-0-4-02	VB-7314-0-4-02		
/2	4.4	3.8	VB-7312-0-4-04	VB-7313-0-4-04	VB-7314-0-4-04		
3/4"	7.5	6.5		VB-7313-0-4-06	VB-7314-0-4-06		
1"	12	10.4		_	_		
ı	14	12.1		VB-7313-0-4-08	VB-7314-0-4-08°		
1¼"	20	17.3	_	VB-7313-0-4-09	VB-7314-0-4-09°		
1½"	28	24.2		VB-7313-0-4-10	VB-7314-0-4-10°		
O"	36	31.3		-	-		
2" 4	41	35.5		VB-7313-0-4-11	VB-7314-0-4-11°		

a - To minimize noise, ensure the flow rate in the piping is less than three meters (10ft)/second and the differential pressure is less than 35 psi (241 kPa). Operating within the cavitation zone or an operating differential pressure above 35 psi (241 kPa) may result in additional noise but is acceptable up to 87 psi (600 kPa).


b - The VB-7363-0-4- series has stainless steel trim.

c - These part numbers do not have RoHs compliant nuts and tail pieces.

For more information, see:

F-26752

3-Way flow patterns






d - Refer to Seat Leakage Classes table.

3-Way Diverting and Sequencing Valves Diverting and Sequencing Valves

3-Way Brass Trim Diverting and Sequencing Valves Body Types			Diverting Threaded NPT	5/8" OD 45° SAE Flared Sequencing		
Series pa	ırt numb	ers	VB-7323-0-4-	VB-7332-0-4-		
Pipe size			½" to 2"	½" I.D.		
Stem flow action			Stem up closes A port and opens AB port to the common B port	Stem up opens B to AB and stem down opens A to AB, stem mid position A and B are both closed		
Stem ford	ce allowe	ed		300 Lbs.		
ANSI pre	ssure cl	ass	250 psi (up to 400 psi below 150°F) 250 psi (up to 400 psi below 150°F)			
ANSI A p	ort seat	leakagea	ANSI Class III			
Control n		d	20 to 281°F (-7 to 138°C) water (up to 60% glycol/water solution)			
Water flo			Modified linear	Sequencing, modified linear		
Allowable	e ΔP for	water	35 psi (241 kPa) max. for normal life			
Size	Cv	Kvs	Valve bo	ody part numbers		
1/2"	2.2	1.9	_	VB-7332-0-4-03		
/2	4.4	3.8	VB-7323-0-4-04	VB-7332-0-4-04		
3/4"	7.5	6.5	VB-7323-0-4-06			
1" 14 12.1		12.1	VB-7323-0-4-08			
11/4" 20 17.3		17.3	VB-7323-0-4-09	_		
1½"	28	24.2	VB-7323-0-4-10			
2"	40	34.6	VB-7323-0-4-11			

3-Way Flow Patterns





2- & 3-Way Valves Sizing for Water

Two-Position

Two-position control valves are normally selected "line size" to keep pressure drop at a minimum. If it is desirable to reduce the valve below line size, then 10% of "available pressure," (that is, the pump pressure differential available between supply and return mains with design flow at the valve location) is normally used to select the valve.

Proportional and Floating

Proportional and floating control valves are usually selected to take a pressure drop equal to at least 50% of the available pressure. As available pressure is often difficult to calculate, the normal procedure is to select the valve using a pressure drop at least equal to the drop in the coil or other load being controlled (except where small booster pumps are used) with a minimum recommended pressure drop of 5 psi (34 kPa). When the design temperature drop is less than 60°F (33°C) for conventional heating systems, higher pressure drops across the valve are needed for good results.

Conventional Heating System

Design Temperature Load Drop °F (°C)	Recommended Pressure Drop (% of Available Pressure)	Multiplier on Load Drop	
60 (33) or more	50%	1x Load Drop	
40 (22)	66%	2x Load Drop	
20 (11)	75%	3x Load Drop	

Reducer Affects

On full flow bodies, offset the affects of directly connected reducer(s) by choosing flow coefficients 6% or more higher.

Cv (Flow coefficient) Determination

The valves' water capacity is based on the following formula:

Where

Cv = Coefficient of flow

Cv is defined as the flow in GPM with $\Delta P = 1$ psi with the valve completely open

GPM = U.S. gallons per minute (60°F, 15.6°C)

 $\Delta P = Differential pressure in psi (pressure drop)$

Proportional 3-Way Valves

Recommended pressure drop - bypass application: 50% of available pressure, or equal to pressure drop through the load at full flow.

3-way valves in the return used to control output by throttling water flow to the load (bypass applications) are controlling output in the same manner as throttling 2-Way valves, and must be selected using the same high pressure drops if good control results are to be obtained.

Recommended pressure drop - constant flow applications: 20% of available pressure, or equal to 1/4 of the pressure drop through the load at full flow.

3-Way valves used with individual pumps to control output by varying water temperature to the load (constant flow applications) are controlling output by mixing two water sources at different temperatures and do not require high pressure drops for good control results.

Water Capacity Graph Instructions

To select the appropriate valve Cv from the graph:

- 1. Select the required flow from the "Flow in GPM" axis.
- 2. Select available pressure drop from the "Pressure Drop in psi" axis.
- 3. Select the appropriate line and follow to the Capacity Cv (Kv) listing and choose the closest valve Cv flow coefficient.
- 4. Confirm the selection by calculation from the water equations.

Additional Water Valve Sizing Information

For more information, download these documents from our website.

- CA-27 3-Way Valves Application Information
- Valve Selection Table Water, F-11080






2-Way Flow, Temperature and Materials

Flow Characteristics


2-way valves with brass plugs have modified equal percentage flow curves and valves with stainless steel plugs have modified linear flow curves. With modified equal percentage flow curves, for equal increments of valve stem stroke, the change in flow rate with respect to valve stroke may be expressed as a constant percent of the flow rate at the time of the change. The change of flow rate with respect to valve stroke is relatively small when the valve plug is near the valve seat and relatively high when the valve plug is nearly wide open. With modified linear flow curves, the flow is directly proportional to the valve stem position.



Temperature Pressure Ratings

Consult the appropriate valve linkage installation instructions for the effect of valve body ambient temperatures on specific actuators. Ratings conform to published values and disclaimer. VB-72xx-0-4-P (Cast Bronze Body) Standards: Pressure to ANSI B16.15 Class 250 with 400 psig up to 150° F decreasing to 321 psig at 281° F, ASTM B584

Caution: Pressure/temperature ratings are for the body only, not the piping. Consult ANSI 816.22 for ratings of solder joint fittings. The lowest piping component ratings are the high limit.



VB-7200 2-Way Globe Valves Material Specifications


VB-720	00 Valve Series to	VB-7211-0-4 (½" to 1½"), VB-7213, VB-7221-0-4 (½" to 1½"), VB-7223, VB- 7214, VB-7224	VB-7211-0-3 (½" to 1½"), VB-7212 (½"), VB-7222 (½")		VB-7253, VB-7263	VB-7273, VB-7283	VBS-9263	
	Body		316 SS					
	Seat	Bronze, ASTM B584 316 stainless ste					el	
	Stem	316 stainless steel						
	Plug	Brass 316 stainless steel						
	Packing	Spring-loaded PTFE/EPDM					PTFE	
Seal	1/2" & 3/4"	PTFE	FPDM		PTFF	Metal to metal	PTFE	
Jeal	1" to 2"	EPDM	LI DIVI	FIFE		316 stainless steel	FIFE	

Packing and Seal materials: Polytetrafluoroethylene (PTFE), ethylene propylene diene monomer (EPDM).



Water Capacity for 0.1 to 9.0 Cv valves


Water Capacity for 0.1 to 9.0 Cv valves

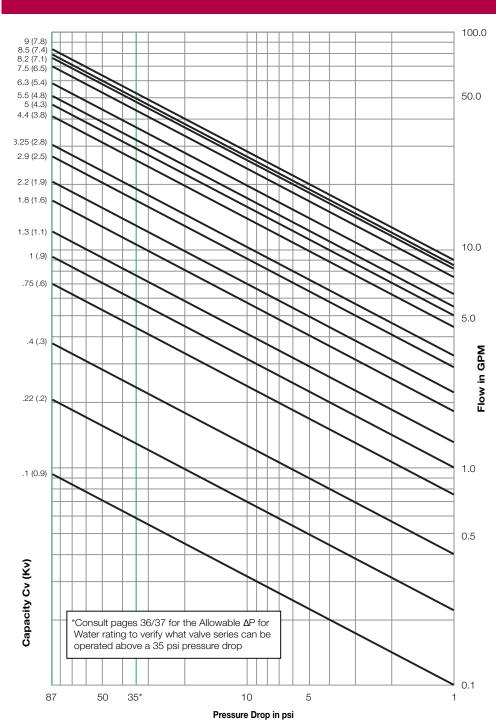

1 GPM = .06309 l/s = .22712 cubic m/h

Water Capacity for 10 to 40 Cv Valves

Water Capacity for 10 to 40 Cv Valves

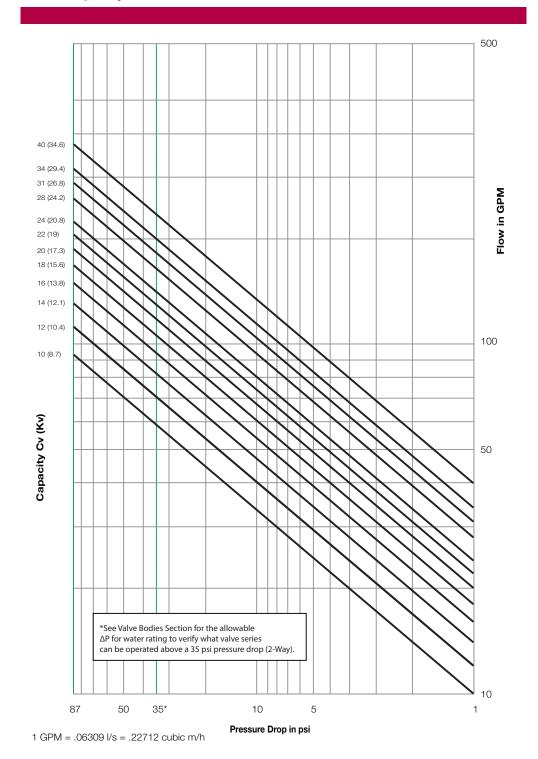

3-Way Flow, Temperature and Materials


Flow Characteristics


3-Way valves are designed so that the flow from inlet ports, (A and B), to the outlet port (AB) is modified linear.

3-Way diverting valves are designed so that the flow from the inlet port (B) to the outlet ports (A and AB) is modified linear.

Sequencing valves have both ports (A and B) closed off in the center of stroke and have modified linear flow for each port as it opens to supply it's coil.

Rangeability is greater than 100:1 for both the A and B ports.






Temperature Pressure Ratings

Consult the appropriate valve linkage installation instructions for the effect of valve body ambient temperatures on specific actuators. Ratings conform to published values and disclaimer. VB-72xx-0-4-P (Cast Bronze Body)

Standards: Pressure to ANSI B16.15 Class 250 with 400 psig up to 150° F decreasing to 321 psig at 281° F, ASTM B584

Caution: Pressure/temperature ratings are for the body only, not the piping. Consult ANSI 816.22 for ratings of solder joint fittings. The lowest piping component ratings are the high limit.



VB-7300 3-Way Globe Valves Material Specifications

Ma	terial	VB-7313, VB-7314	VB-7312, VB-7332, VB-7323	VB-7363	
В	ody		Bronze ASTM, B584		
А ро	rt seat		Brass	316 stainless steel	
В ро	rt seat	Bronze ASTM, B584		3 TO Stalliless Steel	
St	tem	316 stainless steel			
Р	lug	Brass		316 stainless steel	
Pad	cking	Spring-Loaded PTFE/EPDM			
A port seal	½" and ¾"	PTFE		PTFF	
A port sear	1" to 2"	EPDM		, , , , , , , , , , , , , , , , , , ,	
B port seal	½" and ¾"		Metal to metal	Metal to metal 316 stainless steel	
	1" to 2"	Metal to metal			


Packing and Seal materials: Polytetrafluoroethylene (PTFE), ethylene propylene diene monomer (EPDM)



Globe Valves and Actuators

Water Capacity

Water Capacity

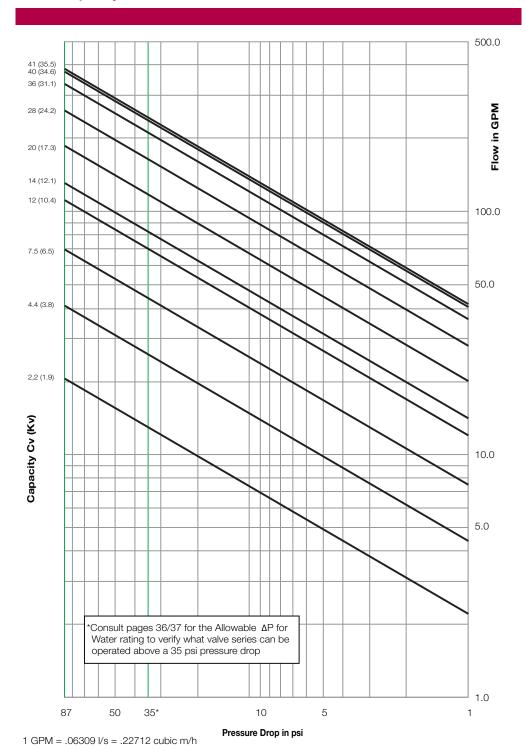

Cavitation Limitations on Valve Pressure Drop

A valve selected with too high a pressure drop can cause erosion of seals and/or wire drawing of the seat. In addition, can cause noise, damage to the valve trim (and possibly the body), and choke the flow.

Do not exceed the maximum differential pressure (pressure drop) for the valve selected. The following formula can be used on higher temperature water systems, where cavitation could be a problem, to estimate the maximum allowable pressure drop across the valve:

$$Pm = 0.5 (P1 - Pv)$$

Where:

Pm = Maximum allowable pressure drop (psi)

P1 = Absolute inlet pressure (psia)

Pv = Absolute vapor pressure (psia)

Note: Add 14.7 psi to gauge supply pressure to obtain absolute pressure value.

For example, if a valve is controlling 200°F water at an inlet pressure of 18 psig, the maximum pressure drop allowable would be:

$$Pm = 0.5 [(18 + 14.7) - 11.53] = 10.6 psi$$

(Vapor pressure of 200°F water is 11.53 psia)

Systems where cavitation is shown to be a problem can sometimes be adjusted to provide higher downstream back pressures. Valves having harder seat materials should be furnished if velocities are excessive

Vapor Pressure of Water

Temp. (°F)	Pressure (psia)
40	0.12
50	0.18
60	0.26
70	0.36
80	0.51

Temp. (°F)	Pressure (psia)
90	0.70
100	0.95
110	1.28
120	1.69
130	2.22


Temp. (°F)	Pressure (psia)
140	2.89
150	3.72
160	4.74
170	5.99
180	7.51

(°F)	(psia)
190	9.34
200	11.53
210	14.12
220	17.19
230	20.78

Pressure

Temp.

Cavitation Limitations on Valve Pressure Drop

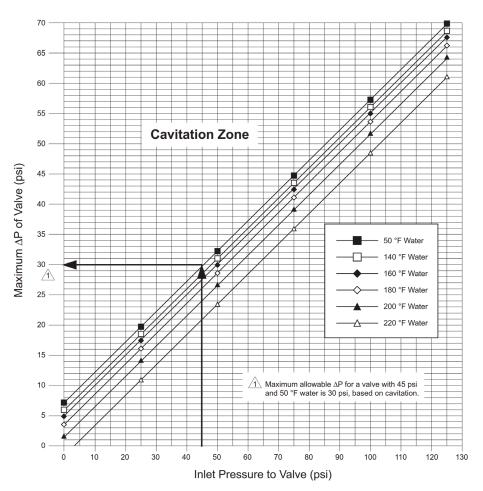

Maximum Allowable Differential Pressure (Δ P)for Water Valves.

Saturated Steam Valve Selection for 1/2" to 6" Valves (2-way only)

Selection instructions

Warning: Pressure reducers do not lower boiler temperatures significantly, resulting in superheated steam. Select only steam valves which can withstand temperatures near the original boiler temperature. **Caution:** Do not size a steam valve with a pressure drop greater than 42% of the absolute pressure.

Actuator must be rated to provide adequate Close off pressure.

Two-position control: Unless otherwise specified, select line-size, 2-Way valves, stem-up open or closed and are normally sized using a minimum of 10% of inlet pressure (psig).

Proportional

- 1. Go to rows which are nearest to minimum pounds/hour flow required.
- 2. Go to columns nearest to the assured supply pressure.
- 3. Note Cv values at the column/row intersection.
- 4. Select the listed valve Cv which provides adequate flow.
- 5. If reducers are used, expect flow to be reduced as much as 15%.

Reference

For further information, download CA-28 Control valve sizing, F-13755, from iPortal. The following is the terminology and the equations for the table above:

"Low Pressure" steam (Up to 15 psig.) "High Pressure" steam (Above 15 psig.) $Cv = Q/(2.1 \times (\Delta P \times (P1 + P2)^{0.5})$ $Cv = Q/(1.38 \times P1abs)$

K = 1 + (0.0007 x °F super-heat)

Dp (psi.)	2	5	10	15	25	35	50	75	100
		"Low Press	sure Steam"			"Hiç	h Pressure Ste	am"	
Lb/Hour			;	Select proportion	nal valve Cv clo	se to chart value	Э.		
2	0.16	0.15	0.13	0.12	0.04	0.03	0.02	0.02	0.01
3	0.24	0.23	0.20	0.18	0.05	0.04	0.03	0.02	0.02
5	0.41	0.38	0.34	0.31	0.09	0.07	0.06	0.04	0.03
8	0.65	0.60	0.54	0.49	0.15	0.12	0.09	0.06	0.05
11	0.90	0.83	0.74	0.67	0.20	0.16	0.12	0.09	0.07
16	1.3	1.2	1.1	1.0	0.29	0.23	0.18	0.13	0.10
24	2.0	1.8	1.6	1.5	0.44	0.35	0.27	0.19	0.15
35	2.9	2.6	2.3	2.1	0.64	0.51	0.39	0.28	0.22
50	4.1	3.8	3.4	3.1	0.91	0.73	0.56	0.40	0.32
74	6.0	5.6	5.0	4.5	1.4	1.1	0.83	0.60	0.47
109	8.9	8.2	7.3	6.7	2.0	1.6	1.2	0.88	0.69
160	13	12	11	10	2.9	2.3	1.8	1.3	1
240	20	18	16	15	4.4	3.5	2.7	1.9	1.5
350	29	26	23	21	6.4	5.1	3.9	2.8	2.2
500	41	38	34	31	9.1	7.3	5.6	4	3.2
750	61	56	50	46	14	11	8	6	5
1100	90	83	74	67	20	16	12	9	7
1600	131	120	107	98	29	23	18	13	10
2400	196	180	161	147	44	35	27	19	15
3500	285	263	235	214	64	51	39	28	22
5000	408	376	335	306	91	73	56	40	32
7000	571	526	469	428	128	102	78	57	44

Size	Cv	Code
	0.10	31
	0.22	33
	0.40	01
	0.75	34
	1	36
1/2"	1.3	02
	1.8	28
	2.2	03
	2.9	30
	3.25	39
	4.4	04
	5.5	05
3/4"	6.3	41
	7.5	06
	8.2	51
1"	9	52
1	10	07
	12	08
	14	61
11/4"	16	62
1/4	18	63
	20	09
	22	71
11/2"	24	72
	28	10
	31	81
2"	34	82
	40	11
21/2"	56	12
3"	85	13
4"	145	14
5"	240	15
6"	370	16

VB-7000 & VBS 9263 1/2" to 2" Hydraulic & Electric Close-Off

Note: The following tables offer a quick guide to valve actuator combination/close-off ratings.

.14 Seat Leakage Classes	
ANSI/FCI 70-2 Leakage Class	Maximum seat leakage
Class II	0.5% of rated Cv
Class III	0.1% of Rated Cv
Class IV	0.01% of Rated Cv
Class V	0.0005 ml per minute per inch of orifice diameter per psi differentia

Close-off ratings

Nominal actuator close-off ratings range from ANSI III (metal to metal trim) to ANSI IV and ANSI V (EPDM and PTFE Discs). Refer to VB-7000 Bronze Bodies for your specific application requirements.

Note: Valve body and actuator size determine the close-off capabilities. Example: All $\frac{1}{2}$ ", 2-Way globe valves will make the same close-off, regardless of the Cv rating, for a given actuator.

Electric Spring Return (SR)

VB-7000 & VBS-9263 Hydraulic & Electric Close-Off (psi)

Stem Up Open, Closed & Mixing All are 250 psi. close-off. VB-7323 Diverting: Bottom port is common.

	MP/MP	R-5200	MA-	-5200	M40-704x	Mx51-	710x	Mx41-707x	x M900Ax-VB Mx51-720x		M41-715x	M40-717x
Linkage	AV-7600				AV-611	None		AV-602	None		AV-602	
Actuator code	Choose coo	de from ass	embly and a	actuator sec	tions.							
Dino	Power Down	Spring Up	Power Down	Spring Up					Power or Sprin	g		
Pipe size	Closed a,c,d	Closed Closed Closed Clo	Closed b,c,d		N.O.a	N.C.b						
1/2"	130	130	130	200	250	250	250	250	250	250	250	250
3/4"	80	80	80	130	250	200	200	250	250	250	250	250
1"	40	40	40	50	125	150	90	180	180	230	250	250
11/4"	25	25	25	35	75	90	60	120	110	150	200	250
11/2"	15	25	60	35	50	60	35	80	75	100	140	160
2"	10	14	35	20	25	32	20	40	40	65	80	120

a - Normally Open (N.O.) assembly using stem up open valve body.

2.16 Electric Non-Spring Return (NSR)

VB-7000 & VBS-9263 Electric Close-Off (psi) Stem Up Open, Closed & Mixing. VB-7323 Diverting: Bottom port is the common. All are 250 psi. close-off

	M400A-VB	Mx41-6043	Mx41-6083	M800A-VB	Mx41-6153	M1500-VB
Linkage	None	AV-611	AV-611	None	AV-611	None
Actuator code		Choo	se code from assembly a	nd actuator sections		
Pipe size	250	225	250	250	250	250
1/2"						
3/4"	198	225	200	250	250	250
1"	92	100	130	207	250	250
1¼"	56	60	100	130	225	250
1½"	37	40	70	88	140	177
2"	19	20	40	48	80	98



<sup>b - Normally Closed (N.C.) assembly using stem up closed valve body or 3-Way A port.
c - With appropriate AV-7600 springs.
d - For 3-Way close-offs you must consider power down and spring-up close offs.</sup>

1/2" to 2" Pneumatic Close-off Ratings

Note: The following tables offer a quick guide to valve actuator combination/close-off ratings.

VB-7000 Pneumatic Close-Off Ratings (psi)

	Actuator	MK-2690	(6 square i	nch)							
	Optional positioner	AK-42309	-500								
	Linkage	AV-7400									
	Spring range		3 to 7 psi.			5 to 10 psi.			8 to 13 psi.		
	Actuator code					202	203				
	Supply air (Psi.)	15/20	15	20	15/20	15	20	15/20	15	20	
	Stem closed positiona	Up N.C.	Down	Down	Up N.C.	Down	Down	Up N.C.	Down	Down	
	1/2"	-	130	220	50	60	170	130	-	90	
	3/,"	-	80	130	30	40	120	60	-	60	
2-Way and	1"	-	35	70	9	15	50	30	-	25	
mixing	11/4"	-	20	40	-	8	30	15	-	15	
	11/2"	-	14	29	-	5	20	10	-	9	
	2"	-	6	14	-	_	10	_	_	-	

Diverting: bottom port as the common. Use MK-46xx below for tightest close-off.

a - In 2 or 3-Way "A" port valves, Up N.C. is normally closed in up position. Down closes a N.O. valve or 3-Way "B" port.

VB-7000 Pneumatic Close-Off Ratings (psi)

	Actuator	MK-46xx (11 square i	nch)						
	Optional Positioner	AK-42309-	-500							
	Linkage	AV-401								
	Spring Range		3 to 7 psi.		ţ	to 10 psi		8 to 13 psi.		
	Actuator code		301			302			303	
	Supply Air (Psi.)	15/20	15	20	15/20	15	20	15/20	15	20
	Stem closed positiona	Up N.C.	Down	Down	Up N.C.	Down	Down	Up N.C.	Down	Down
	1/2"	30	250	250	100	120	250	250	10	200
	3/4"	20	180	250	70	80	180	160	-	120
2-Way and	1"	5	90	150	30	35	100	60	-	65
Mixing	11/4"	-	50	90	15	20	60	40	-	40
	1½"	-	30	60	10	10	40	35	-	25
	2"	-	15	30	_	-	25	15	-	10

Diverting: bottom port as the common. All sizes are balanced for 250 psi close-off.

a - In 2 or 3-Way "A" port valves, Up N.C. is normally closed in up position. Down closes a N.O. valve or 3-Way "B" port.

VB-7000 Pneumatic Close-Off Ratings (psi)

			,	,	,	,	,	,	,	
	Actuator	MK-66xx (5	50 square	inch, half	inch strok	e)				
	Optional positioner	AK-42309-	500							
	Actuator and linkage	MK-6601-3	301		MK-6611	-302		MK-6621-3	303	
	Linkage	AV-430								
	Spring range	3 to 8 611				5 to 10		8 to 13 613		
	Actuator code					612				
	Supply air (Psi.)	15/20	15	20	15/20	15	20	15/20	15	20
	Stem closed positiona	Up N.C.	Down	Down	Up N.C.	Down	Down	Up N.C.	Down	Down
2 way and mixing	1½"	40	170	250	80	110	230	170	40	160
2-way and mixing	2"	20	90	160	50	60	120	90	20	90

Caution! Diverting: bottom port as common. Actuator may be too strong, use smaller actuator.

a - In 2 or 3-Way "A" port valves, Up N.C. is normally closed in up position. Down closes a N.O. valve or 3-Way "B" port.



Overview of VB-7000 1/2" to 2" Valve Actuator Assemblies


Globe Valve Assemblies

The VA, VF, and VS-7000 series Linked Globe Valve Assemblies are complete actuator/valve assemblies that accept Two-position, floating or proportional control, respectively, from a DDC system or from a thermostat, for control of hot water, chilled water and steam coils. These valve assemblies consist of linked spring return and non-spring return actuators mounted on $\frac{1}{2}$ " to 2" (15 mm to 50 mm) 2-Way and 3-Way globe valve bodies, using a specially designed linkage assembly. 3-way assemblies are available for mixing (1/2" to 2") and diverting (1/2" to 2") applications.

Typical applications include reheat on VAV boxes, fan coil units, hot and chilled water coils in air handling units, unit ventilators, and central system applications.

Kits are available separately to allow field assembly of SmartX actuators to valve bodies.


Mx4x-6xxx and Mx4x-7000 Series Spring and Non-Spring Return Actuator/Linkage Assemblies with SmartX actuators




VB-73xx Series 1/2" to 2" 3-Way Assembly with SmartX Linear SR Actuators


2-Way Linked Globe Valve Assembly

(Non-Spring Return model shown)



VB-72xx 2-Way Globe Valve with MA/MP/MPR-5XXX Hydraulic





Seat Leakage Classes ANSI/FCI 70-2


leakage class Class II

Class III

Class IV

Class V

3-Way Linked Globe Valve Assembly (Spring Return Model shown)



Maximum seat leakage

0.5% of rated Cv

0.1% of Rated Cv

0.01% of Rated Cv 0.0005 ml per minute per inch of

orifice diameter per psi differential

VB-73xx 3-Way Globe Valve with MK-66x1 Pneumatic Actuator



Globe Valves and Actuators

Globe Valve Assembly Selection Procedure

When selecting a globe valve assembly, first determine the applicable codes for the Control signal type, valve body configuration, end connection, port size and actuator according to Assembly Ordering on the pages that follow. Select a globe valve assembly part number as follows:

1. Control signal type, valve body configuration, and end connection

Refer to Assembly Ordering and select the appropriate codes for the part-number fields.

2. Valve size (flow coefficient)

If the required flow coefficient (Cv) has not been determined, do so as follows:

Refer to Sizing and Selection to calculate the required Cv.

Select the nearest available Cv value and corresponding valve body port code from Assembly Ordering.

3. Actuator and linkages

Select the appropriate actuator and code, according to Assembly Ordering on the next pages based on the Control signal type, required valve normal position, and voltage requirements.

Note: Linkages shown in Specification tables are supplied with the actuator. When shown in Optional accessories the linkage must be ordered separately.

4. Close-off pressure

Confirm, with respect to actuator close-off capacity, that the selected actuator and valve body combination provides sufficient close-off pressure. If no close-off pressure is shown, the valve body/actuator combination is not valid.

5. Available space

If available space is a consideration, check the appropriate figure in the separately available Wiring, Dimensions and Reference document F-28125 from the mySchneider download center.

me m			Electric	Non-Spring	g Return Ope	ration	Electric Spri	ng Return	Operation		natic Spring n Operation
Range name	Description	Family	Proportional	Floating	Pulse Width Modulated	Two Position	Proportional	Floating	Two Position	Two position	Proportional with Positive Positioner
	Originally developed	Mx51-710x					•	•	•		
ž	by Schneider Electric in the United States under	Mx51-720x, Mx61-720x 1					•	•	•		
SmartX	to SmartX with new features	MG350V	•	•	•	•					
	Developed by Schnei- der Electric in Europe. Introduced to North	M400, M800, M1500	•			3-Wire					
Forta	America in 2008 because of its flexibility and ease of setup. 2	M900 (Coming soon to North America!)					•		• 3-Wire		
ıcy	Earlier North American actuators developed by Schneider Electric; (Barber Colman, Siebe, Invensys). Still popular because of their value and reliability.	MK-2690, MK-4xxx, MK-6xxx, MK-8xxx								•	•
Legacy		MA-521x, MP-521x, MP-541x, MP-5513, MPR-5613					•		•		


¹⁻ The Mx51-720x, Mx61-720x actuator are higher force versions of the Mx51-710x for large valves and high close-off applications.



²⁻ Forta actuators have universal inputs for proportional and floating operation.

Ordering VB-7000 Globe Valve Assemblies SmartX Actuators

Specify Seven Part Number Fields to Determine the Valve Actuator Assembly Part Number

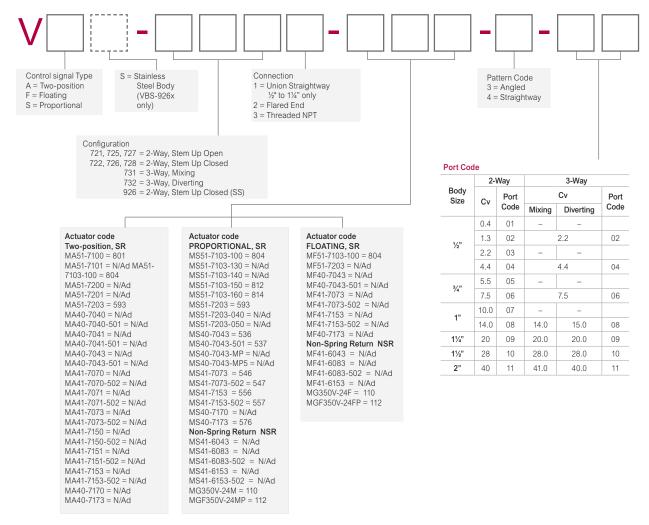

 $[\]hbox{d-Factory assemblies not available. Purchase actuator and valve body separately and field assemble.}\\$


The configuration of the valve assembly determines the valve stem position and flow, as shipped from the factory. See the table below.

Valve Assemblies	Valve Body Action	Factory Shipp	ed Position	Action	
valve Assemblies	valve Body Action	Valve Stem	Flow		
Vx-721x-xxx-4-P Vx-725x-xxx-4-P Vx-727x-xxx-4-P	2-Way Stem Up Open		Open	A to AB Flow decreases as actuator extends	
Vx-722x-xxx-4-P Vx-726x-xxx-4-P Vx-728x-xxx-4-P Vxs-9263-xxx-x-P	2-Way Stem Up Closed	Up	Closed	A to AB Flow increases as actuator extends	
Vx-731x-xxx-4-P	3-Way		Flow	A to AB Flow increases as actuator extends B to AB Flow decreases as actuator extends	
Vx-732x-xxx-4-P	3-Way Diverting		B to AB	B to A Flow increases as actuator extends B to AB Flow decreases as actuator extends	



Ordering VB-7000 Globe Valve Assemblies (Other Actuators) Hydraulic, Pneumatic & Forta Actuators

Specify Six Part Number Fields to Determine the Valve Actuator Assembly Part Number

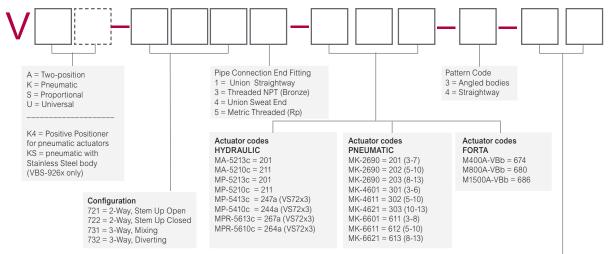

The configuration of the valve assembly determines the valve stem position and flow, as shipped from the factory. See the table below.

Valve Assemblies	Valve Body	Factory Shipped	d Position	A -41	
valve Assemblies	Action	Valve Stem	Flow	Action	
Vx-721x-xxx-4-P	2-Way Stem Up Open		Open	A to AB Flow decreases as actuator rotates CW	
Vx-722x-xxx-4-P	2-Way Stem Up Closed		Closed	A to AB Flow increases as actuator rotates CW	
Vx-731x-xxx-4-P	3-Way	Up		A to AB Flow increases as actuator rotates CW B to AB Flow decreases as actuator rotates CW	
Vx-732x-xxx-4-P	3-Way Diverting		Flow B to AB	B to A Flow increases as actuator rotates CW B to AB Flow decreases as actua- tor rotates CW	

a - AV-601 is not av			

b - Add -S2 for auxiliary switch. Only available as a field assembly. c - Add -500 for auxiliary switch. Only available as a field assembly.


	2-V	Vay	3-Way				
Body Size	Cv*	Port		Cv	Port		
OIZO		Code	Mixing	Diverting	Code		
	0.4	01	_	-			
1/2"	1.3	02	2.2	2.2	02		
/2	2.2	03	-	_			
	4.4	04	4.4	4.4	04		
3/4"	5.5	05	-	-			
/4	7.5	06	7.5	7.5	06		
1"	10.0	07	-	_			
1	14.0	08	14.0	15.0	08		
11/4"	20	09	20.0	20.0	09		
1½"	28	10	28.0	28.0	10		
2"	40	11	41.0	40.0	11		


^{*}Brass trim models listed.

1/2" to 2" 2-Way Globe Valves with Linear SR Actuators2-Way Linked Globe Valve Assemblies with Linear Series Spring Return Actuators

Choose a valve assembly having a close-off pressure capability sufficient for the application. Not all valve body and actuator combinations are available factory-assembled. Some combinations must be field-assembled.

2-Way Linked Globe Valve Assemblies





Mx51-710x

Mx51-720x

Actuator force rating

105 lbf (467 N) 220 lbf (979 N)

Actuator model (Actuator code)

Two-positionMA51-7100 (801)
MA51-7101
MA51-7103-100 (804)

Floating MF51-7103-100 (804)

Proportional MS51-7103-100 (804) MS51-7103-130 MS51-7103-140 MS51-7103-150 (812) MS51-7103-160 (814) Two-position MA51-7200 MA51-7201 MA51-7203 (593)

Floating MF51-7203 (593)

Proportional MS51-7203 (593) MS51-7203-040 MS51-7203-050

Valve assembly	D d.	Valve size in.	0	1	Ac	ctuator close-off pressu	ose-off pressure pside	
part number bj	P code	(mm)	Cvc	kvsc	N.O.f, j	N.C.g, j		
	1		0.4	0.3				
	2	1/ /45)	1.3	1.1	250	250		
Vx-72x1-xxx-4-P Vx-72x2-xxx-4-P Vx-72x3-xxx-4-P	3	1/2 (15)	2.2	1.9				
	4		4.4	3.8			-	
	5	3/ (00)	5.5	4.8	200	200		
VxS-9263-0-4-P	6	3/4 (20)	7.5	6.5				
	7	4 (05)	10.0	8.7	150	90		
	8	1 (25)	14.0	12				
	9	1¼ (32)	20.0	17	90	60	150	
Vx-72x3-xxx-4-P Vx-72x5-xxx-4-Ph	10	1½ (40)	28.0	24	60	35	100	
	11	2 (50)	40.0	35	32	20	65	

b - To determine a specific part number, see "Ordering VB-7000 Globe Valve Assemblies (Other Actuators)" on page 94 for the relevant part series.

b - 10 determine a C_{p} . $C = \frac{GPM}{\sqrt{\Delta P}} \quad \text{Where } \Delta P \text{ is measured in psi}$

kvs = <u>Cv</u> 1.156 $=\frac{m^3/h}{\sqrt{\Delta P}}$

Where ΔP is measured in bar = 100 kPa

d - Close-off ANSI IV (.01%) for soft seats.

e - Close-off pressure ratings describe only the differential pressure which the actuator can close-off with adequate seating force. Consult valve body specifications for other limitations. The rating value is the pressure difference between the inlet and outlet ports.

 $\ensuremath{\text{f}}$ - Normally open (N.O.) assembly using stem up open valve body.

g - Normally closed (N.C.) assembly using stem up closed valve body

h - Metric thread 15 to 80 mm (Rp 1/2 to Rp 3).

j - Valve body and actuator size determine the close-off capabilities. Example: All ½", 2-Way globe valves will make the same close-off regardless of the Cv rating for a given actuator.






1/2" to 2" 2-Way Globe Valves with Linked SR Actuators 2-Way Linked Globe Valve Assemblies with Spring Return Actuators

Choose a valve assembly having a close-off pressure capability sufficient for the application.

2-Way Spring Return Linked Globe Valve Assemblies



Mx40-704x	Mx41-	Mx40-717x							
	Actuator torque r	ating (minimum)	1						
35 lb-in (4 N-m)	60 lb-in (7 N-m)	133 lb-in (15 N-m)	150 lb-in (17 N-m)						
	Actuator model	(Actuator code)	1						
Two-position MA40-7040 MA40-7041	Two-position MA41-707x	Two-position MA41-715x	Two-position MA40-717x						
MA40-7043 (536)	Floating MF41-7073	Floating MF41-7153	Floating MF40-7173						
Floating MF40-7043 (536)	Proportional MS41-7073 (546)	Proportional MS41-7153 (556)	Proportional MS40-717x (576)						
Proportional MS40-7043 (536) MS40-7043-501 (537)	MS41-7073-502 (547)	MS41-7153-502 (557)							
	Note: Not all factory Actuator codes are available.								
Linkage kit part number									

AV-602 (1" to 2")

					/ 11 0 1 1 (/2 10 2)	/ 11 002 (1 10 2)	717 002 (174 102)	
						Actuator close-o	off pressure psi ^{cd}	
Valve assembly part number ^a	P code	Valve size in. (mm)	Cvb	kvs ^b	Single actuator			
	01		0.4	0.3				
Vv 7214 vvv 4 B	02	1/ (4.5)	1.3	1.1				
Vx-7214-xxx-4-P Vx-7224-xxx-4-P Vx-7211-xxx-4-P Vx-7221-xxx-4-P Vx-7223-xxx-4-P Vx-7253-xxx-4-P	03	½ (15)	2.2	1.9	250			
	04		4.4	3.8		-		
	05	3/ (20)	(20) 5.5 7.5	4.8			-	
	06	74 (20)		6.5				-
Vx-7263-xxx-4-P	07	1 (05)	10.0	8.7	125	180		
Vx-7273-xxx-4-P Vx-7283-xxx-4-P	08	1 (25)	12	125	180			
VxS-9263-xxx-4-P	09	1¼ (32)	20.0	17	75	120	200	
	10	1½ (40)	28.0	24	50	80	140	160
Vx-7213-xxx-4-P Vx-7223-xxx-4-P	11	2 (50)	40.0	35	25	40	80	120

AV-611 (1/2" to 2")



AV-602 (11/4" to 2")


a - To determine a specific part number, see "Ordering VB-7000 Globe Valve Assemblies (Other Actuators)" on page 94 for the relevant part series. b - kvs = m3/h ($\Delta P = 100 \ kPa$) kvs = Cv / 1.156 $Cv = kvs \times 1.156$ c - All Vx-72xx leakage ratings are ANSI V to 35psi and ANSI IV above 35psi; with the exception of Vx-7273 and Vx-7283 (ANSI III).


d - For seat leakage ratings, refer to Seat Leakage Classes.

1/2" to 2" 3-Way Globe Valves with Linear SR Actuators

Choose a valve assembly having a close-off pressure capability sufficient for the application. Not all valve body and actuator combinations are available factory-assembled. Some combinations must be field-assembled.

3-Way Linked Globe Valve Assemblies





Actuator force rating								
105 lbf (467 N)	220 lbf (979 N)							
Actuator model (Actuator code) ^b								

Two-positionMA51-7100
MA51-7101
MA51-7103-100 (804)

Floating MF51-7103-100 (804)

Proportional MS51-7103-100 (804) MS51-7103-130 MS51-7103-140 MS51-7103-150 (812) MS51-7103-160 (814) Two-position MA51-7200 MA51-7201 MA51-7203 (593)

> Floating MF51-7203

Proportional MS51-7203 (593) MS51-7203-040 MS51-7203-050

Valve assembly part number ^c	P code	Valve size in. (mm)	Cvd	kvs ^d	Actuator close-off pressure psi®		
	2	1/ /45)	4.4	3.8	250		
	4	1/2 (15)	4.4	3.8	250		
	6	3/4 (20)	7.5	6.5	200	-	
Mixing Vx-7313-xxx-4-P	8	1 (25)	14.0	12.0	90		
	9	1¼ (32)	20.0	17	60	150	
	10	1½ (40)	28	24	35	100	
	11	2 (50)	41	36	20	65	
	4	½ (15)	4.4	3.8		-	
	6	3/4 (20)	7.5	6.5			
Diverting	8	1 (25)	15.0	13.0	250		
Vx-7323-xxx-4-P	9	1¼ (32)	20.0	17.3	200		
	10	1½ (40)	28	24.2		250	
	11	2 (50)	40	34.6			

b - Models without actuator codes are not offered as factory assemblies. Purchase the actuator and the valve body separately and field assemble. For available factory assemblies, consult the price schedule.



c - To determine a specific part number, see "Ordering VB-7000 Globe Valve Assemblies (Other Actuators)" on page 94 for the relevant part series.

d - Cv = gpm $/\sqrt{\Delta}P$ (where ΔP is measured in psi.) kvs = Cv / 1.156


e - Close-off pressure ratings describe only the differential pressure which the actuator can close-off with adequate seating force. Consult valve body specifications for other limitations. The rating value is the pressure difference between the inlet and outlet ports.

1/2" to 2" 3-Way Globe Valves with Linked SR Actuators 3-Way Linked Globe Valve Assemblies with Spring Return Actuators

Choose a valve assembly having a close-off pressure capability sufficient for the application. Not all valve body and actuator combinations are available factory-assembled. Some combinations must be field-assembled.

Mx40-704x

3-Way Spring Return Linked Globe Valve Assemblies



Valve assembly

part numberb

Vx-7313-xxx-4-P

Vx-7323-xxx-4-P

		Actuator torque r	rating (minimum)					
	35 lb-in (4 N-m)	60 lb-in (7 N-m)	133 lb-in (15 N-m)	150 lb-in (17 N-m)				
		Actuator model	(Actuator code)					
	Two-position MA40-7040 MA40-7041 MA40-7043 (536) Floating MF40-7043 (536) Proportional MS40-7043 (536) MS40-7043-502 (537)	Two-position MA41-707x Floating MF41-7073 Proportional MS41-7073 (546) MS41-7073-502 (547) Note: Not all factory Actu Linkage kit p	part number AV-602	Two-position Floating MF40-7173 Proportional MS40-7173 (576)				
	(½" to 2")	(1" to 2")	(1½" to 2")	AV-602				
kvs°		Actuator close-of	ff pressure psig ^d					
RVS		Single actuator						
1.9								
3.8	250	-						
6.5								
12.0	125	180	-	250				
17	75	100						
24	50	70	140	160				

Mx41-7xxx

Mx40-7173

250

Valve size

in. (mm)

1/2 (15)

3/4 (20)

1 (25)

11/4 (32)

1½ (40)

2 (50)

1/2 (15)

³/₄ (20)

1 (25)

11/4 (32)

1½ (40)

code

02

04

06

09

10

11

02

04

06

80

09

10

11

Cv

2.2

4.4

7.5

14.0

20.0

2.2

4.4

7.5

15

20

28

40

36

1.9

3.8

6.5

13.0

17.3

24.2

34.6



120

^{2 (50)} b - To determine a specific part number, see "Ordering VB-7000 Globe Valve Assemblies (Other Actuators)" on page 94 for the relevant part series. c - kvs = m3/h ($\Delta P = 100 \text{ kPa}$) kvs = Cv / 1.156 $Cv = kvs \times 1.156$

d - Mixing Valves A port seat leakage ANSI IV, B port seat leakage ANSI III, Diverting Valves seat leakage is ANSI III.

e - For field assembly, factory actuator, linkage and valve assembly may be offered.

1/2" to 2" 2-Way Globe Valves with Linked NSR Actuators 2-Way Linked Globe Valve Assemblies with Non-Spring Return Actuators

Choose a valve assembly having a close-off pressure capability sufficient for the application. Not all valve body and actuator combinations are available factory-assembled. Some combinations must be field-assembled.

					Mx41-	60x3	Mx41- 6153		
		Spring Retur							
			9			Actuator Torque Rating (minimum)		
)		44 lb-in. (5 N-m)	88 lb-in. (10 N-m)	133 lb-in. (15 N-m)		
						Actuator Model (Actuato	or Code)		
					Floating MF41-6043 Proportional	Floating MF41-6083 Proportional	Floating MF41- 6153 Proportional		
	•				MS41-6043	MS41-6083	MS41- 6153		
					Note: Not all factory actuator codes are available.				
Note: Only bronze bod		. VBS-9263-0-4- re available with		s steel	Linkage Kit Part Number				
		off performance			AV-611				
Value Assembly	Р	V-1 0'			Actuator Close-off Pressure psi ^{cd}				
Valve Assembly Part Number ^a	Code	Valve Size in. (mm)	Cv ^b	kvsb			Single Actuator		
	01		0.4	0.3					
Vx-7211-xxx-4-P	02	1/2 (15)	1.3	1.1					
Vx-7213-xxx-4-P	03		2.2	1.9	225	-			
Vx-7214-xxx-4-P Vx-7221-xxx-4-P	04		4.4 5.5	3.8 4.8					
Vx-7223-xxx-4-P Vx-7224-xxx-4-P	06	³ / ₄ (20)	7.5	6.5			-		
Vx-7253-xxx-4-P Vx-7263-xxx-4-P	07		10.0	8.7					
Vx-7273-xxx-4-P Vx-7283-xxx-4-P	08	1 (25)	14.0	12	100	130			
	09	1¼ (32)	20.0	17	60	100			
	10	1½ (40)	28.0	24	40	70	140		
Vx-7213-xxx-4-P Vx-7223-xxx-4-P	11	2 (50)	40.0	35	20	40	80		


- a To determine a specific part number, see "Ordering VB-7000 Globe Valve Assemblies (Other Actuators)" on page 94 for the relevant part series.
- $b kvs = m^3/h \; (\Delta P = 100 \; kPa) \qquad kvs = Cv \, / \; 1.156 \qquad Cv = kvs \; x \; 1.156$
- c All Vx-72xx leakage ratings are ANSI V to 35 psi and ANSI IV above 35 psi; with the exception of Vx-7273 and Vx-7283 (ANSI III).
- d -Close-off pressure ratings describe only the differential pressure which the actuator can close-off with adequate seating force. Consult valve body specifications for other limitations. The rating value is the pressure difference between the inlet and outlet ports.
- f Shown for field assembly.



1/2" to 2" 3-Way Globe Valves with Linked NSR Actuators 3-Way Linked Globe Valve Assemblies with Non-Spring Return Actuators

Choose a valve assembly having a close-off pressure capability sufficient for the application. Not all valve body and actuator combinations are available factory-assembled. Some combinations must be field-assembled.

3-Way Non-Spring Return Linked Globe Valve Assemblies^f



Mx41-	Mx41- 6153							
Actuator Torque Rating (minimum)								
44 lb-in (5 N-m)	88 lb-in (10 N-m)	133 lb-in (15 N-m)						
Act	uator Model (Actuator Code)							
Floating MF41-6043 Proportional	Floating MF41-6083 Proportional	Floating MF41- 6153 Proportional						
MS41-6043	MS41- 6153							
	I factory actuator codes are av Linkage Kit Part Number	raliable.						
Linkage Kit Part Number								

AV-611

Valve Assembly Part Numbera	P Code	Valve Size in. (mm)	Cv ^b	kvs ^b	Act	uator Close-off Pressure psi [∞]	
	02	1/ /45)	2.2	1.9			
	04	1/2 (15)	4.4	3.8	225	-	
	06	³ / ₄ (20)	7.5	6.5			-
Vx-7313-xxx-4-P	08	1 (25)	14.0	12.0	100	180	
	09	11/4 (32)	20.0	17	60	120	
	10	1½ (40)	28	24	40	75	140
	11	2 (50)	41	36	20	40	80
	02	17 (15)	2.2	1.9			'
	04	1/2 (15)	4.4	3.8			
	06	3/4 (20)	7.5	6.5			
Vx-7323-xxx-4-P	08	1 (25)	15.0	13.0	250	-	
	09	11/4 (32)	20.0	17.3			
	10	1½ (40)	28	24.2			
	11	2 (50)	40	34.6			

- a To determine a specific part number, see "Ordering VB-7000 Globe Valve Assemblies (Other Actuators)" on page 94 for the relevant part series.
- $b kvs = m^3/h \; (\Delta P = 100 \; kPa) \qquad kvs = Cv \, / \, 1.156 \qquad Cv = kvs \; x \; 1.156$
- c Mixing Valves A port seat leakage ANSI IV, B port seat leakage ANSI III, Diverting Valves seat leakage is ANSI III.
- e Dual actuators are not available as factory assemblies.

Some factory assembly may be available but components may be ordered separately for field assembly.

f - Shown for field assembly.

More info

Scan the QR code or visit the link below for more information.






VB-7000 Series Globe Valve and Actuator Assemblies

1/2" to 2" 2 - and 3-Way Globe Valves with MG350V NSR Actuators

Applicable literature

- MG350V Economy Model Standard Speed, MG350V-24F, MG350V-24M
- F-27907 Specification Sheet
- F-27852 Installation instructions
- MG350V Economy Plus Model Fast Speed + Feedback/Alarms MGF350V-24FP, MGF350V-24MP

MG350V installed on a VB-7000 Globe Valve




End View

Select valve actuator combination having sufficient close-off for application.


Boo	ly	Close-off Ratings	s, psi (kPa)ª	Valve Bodies
P code	Size	MGF350V-24FP, MGF350V-24MP	MG350V-24F, MG350V-24M	VB-7211-0-3-P, VB-7211-0-4-F
-01, -02, -03, -04	½" (15 mm)	219 (1510)	250 (1724)	VB-7212-0-4-P, VB-7213-0-4-F
-05, -06	¾" (20 mm)	135 (931)	157 (1082)	VB-7214-0-4-P, VB-7221-0-4-F
-07, -08	1" (25 mm)	67 (462)	79 (545)	VB-7222-0-4-P, VB-7223-0-4-F VB-7224-0-4-P, VB-7253-0-4-F
-09	1¼" (32 mm)	42 (290)	49 (338)	VB-7263-0-4-Pa, VB-7273-0-4-VB-7283-0-4-P
,	'	Compatible Three-Way V	/alve Series	
-02, -04	½" (15 mm)	219 (1510)	250 (1724)	
-06	34" (20 mm)	135 (931)	157 (1082)	VB-7312-0-4-P, VB-7313-0-4-F
-08	1" (25 mm)	67 (462)	79 (545)	VB-7314-0-4-P, VB-7363-0-4-F
-09	1¼" (32 mm)	42 (290)	49 (338)	
04, -06, -08, -09,	½" to 2"	250 (1712	2)	VB-7323-0-4-P

a - VB-7263 series valves with port codes from -28 to -82 have the same close-off ratings as the respective matching pipe size VB-7263 series valves with port codes -01 to -11.




Side View

Actuator diagram



1/2" to 2" 2/3-Way Globe Valves with NSR Actuators

	Valve Body ^a			Close-off Ratings, psi	(kPa)
2-Way Valvesbc	P code	Size	M400A (VB) 674	M800A (VB) 680	M1500A (VB) 68
	-01, -02, -03, -04	½"(15 mm)	250 (1712)	250 (1712)	
VB-7211-0-3-P VB-7211-0-4-P VB-7212-0-4-P	-05, -06	¾" (20 mm)	198 (1356)	250 (1712)	
VB-7213-0-4-P VB-7214-0-4-P VB-7221-0-4-P VB-7222-0-4-P	-07, -08	1" (25 mm)	92 (630)	207 (1418)	-
VB-7223-0-4-P VB-7223-0-4-P VB-7224-0-4-P VB-7253-0-4-P	-09	1¼" (32 mm)	56 (384)	130 (890)	
VB-7263-0-4-P VB-7273-0-4-P VB-7283-0-4-P	-10	1½" (40 mm)	37 (253)	88 (603)	177 (1212)
	-11	2" (40 mm)	19 (130)	48 (329)	98 (671)
3-Way Valves ^b	P code	Size	M400A (VB)	M800A (VB)	M1500A
	-02, -04	½"(15 mm)	250 (1712)	250 (1712)	
	-06	¾" (20 mm)	198 (1356)	250 (1712)	
VB-7312-0-4-P	-08	1" (25 mm)	92 (630)	207 (1418)	
VB-7313-0-4-P VB-7314-0-4-P	-09	1¼" (32 mm)	56 (384)	130 (890)	-
	-10	1½" (40 mm)	37 (253)	88 (603)	
	-11	2" (40 mm)	19 (130)	48 (329)	



Actuator Mounted on a 2-Way VB-7000 Series Valve

-10, -11


a - Not all bodies are available for all port codes.


b - Substitute VU- for VB- and add the Actuator code to substitute for the -0- (e.g., 674, 680, etc.). c - Not all valve styles are available in all sizes or "P" codes.

1/2" to 2" Globe Valves with Hydraulic SR Actuators

Select Actuator Type or Actuator Code (xxx) series with correct input signal for sufficient close-off for the application. Not all valve body and actuator combinations are available factory-assembled. Some combinations must be fieldassembled.

		Actuat	or		MA-521x	MP-5xxx	MPR-5612
		Input sig	gnal		2-Position Electric	VDC	mA ^{dc}
		Actuator cod	de (xxx)		а		а
	Factory available valve assembly	Valve body	P code	Size	Close-off pr	essure rating	(psi)
			-01, -02, -03, -04	½"(15 mm)		130	
		VB-7213-0-4-P	-05, -06	¾" (20 mm)		80	
1.O.	VA-7213-2xx-4-P	VB-7213-0-4-P	-07, -08	1" (25 mm)		40	
v.O.	VS-7213-xxx-4-P	VB-7253-0-4-P	-09	1¼" (32 mm)		25	
		VB-7273-0-4-P	-10	1½" (40 mm)		15	
			-11	2" (40 mm)		10	
			-01, -02, -03, -04	½"(15 mm)	200	1	30
		VB-7223-0-4-P	-05, -06	¾" (20 mm)	130	3	30
v.C.	VA-7223-2xx-4-P	VB-7224-0-4-P	-07, -08	1" (25 mm)	50	4	10
v.C.	VS-7223-xxx-4-P	VB-7263-0-4-P	-09	1¼" (32 mm)	35	2	25
		VB-7283-0-4-P	-10	1½" (40 mm)	35	2	25
			-11	2" (40 mm)	20		14



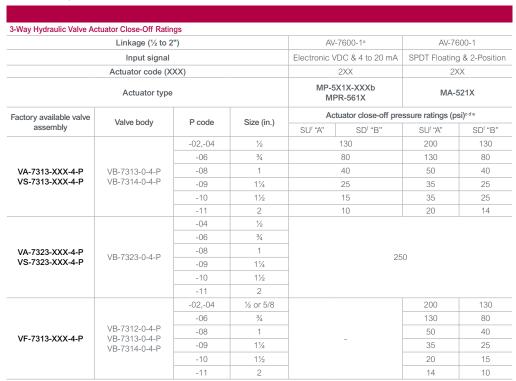



Scan the QR code or visit the link below for more information.



http://goo.gl/EpcPNP



a - MP-541X, MPR-5XXX use AV-7600-1 or AV-600 and AV-601.
b - Factory shipments have unpainted large springs. For 0 to 10 volt and 4 to 20 mA controllers, use blue and booster springs.
c - Close-off ratings for mixing or sequencing valves: (SU = "A" port, SD = "B" port). "A" port (SU) ratings equal pressure at port "A" minus pressure at port "B" minus pressure at port "A".

d - Close-off pressure ratings describe only the differential pressure which the actuator can close-off to standards with adequate seating force.

Consult valve body specifications for other limitations.
e - Diverting valves may be used in mixing applications with minor affects on flow.
f - SU- Stem Up; SD- Stem Down.

½" to 2" 2-Way and 5/8" 3-Way Globe Valves with Pneumatic Actuators

Select Actuator Type or Actuator Code (xxx) series with correct input signal for sufficient close-off for the application. If selecting component parts, select Valve Body and Positive Positioner if required.

2-Way 1	2" to 2" Globe Valve	s with Pneumati	c Actuators	i									_						_	_	_	
							7))
	Eff	ective area					6 S	q. in.					11 S	q. in.					50	Sq. i	n.	
		Actuator					_	2690			_	4601		4611		4621	_	6601	MK-			<-6621
		ctuator code (xxx)*			_	01	_	02		03	-	01	_)2	_	03		11	_	12		613
		g range (psig) Linkage			3 t	0 7		7400	8 to	13	3 t	0 6	5 to		10 t	0 13	31	8 0.) 10 /-430		to 13
		Positioner (VK4)				Δ		309-50	10			Δ	K-423		10				AK-42			
	Factory available ass	` ,	N.O. val	ves	Y	es	120		lo		Y	es	120	N			Y	es	7 (1 < 12	_000	No	
	with Positive Positi		N.C. val	ves		Ν	lo		Y	es		N	lo		Y	es		Ν	10		Τ,	Yes
											Actua	tor clo	se-off	press	sure ra	ating (psi)					
NP	Factory available valve assembly	Valve body	P	Size in.			ı					Supp	ly air p			-						
					15	20	15	20	15	20	15	20	15	20	15	20	15	20	15	20	15	20
			-1-2-3-4	1/2	130	220	60	170		90	250	250	120	250	10	200						
			-5-6	3/4	80	130	40	120		60	180	250	80	180		120						
2-Way	VK-7213-xxx-4-P VK4-7213-xxx-4-P	VB-7213-0-4-P VB-7214-0-4-P	-7-8	1	25	70	15	50		25	90	150	35	100		65						
N.O	VK-7214-xxx-4-P	VB-7253-0-4-P	-9	11/4	20	40	8	30	-	15	50	90	20	60	_	40						
	VK4-7214-xxx-4-P	VB-7373-0-4-P	-10	1½	14	29	5	20		9	30	60	10	40		25	170	250	110	230	40	160
			-11	2	6	14	-	10		-	15	30	-	20		-	90	160	60	120	20	90
			-1-2-3-4	1/2			5	50	1	30	3	30	10	00	2	50						
			-5-6	3/4			3	30	6	60	2	20	7	0	1	60						
2-Way	VK-7223-xxx-4-P VK4-7223-xxx-4-P	VB-7223-0-4-P VB-7224-0-4-P	-7-8	1				9	3	80		5	3	0	Е	60				-		
N.C.	VK-7224-xxx-4-P	VB-7263-0-4-P	-9	11/4		-			1	5			1	5	4	10						
	VK4-7224-xxx-4-P	VB-7283-0-4-P	-10	1½				-	1	0		-	1	0	3	35		10	8	80		170
			-11	2						-					1	15	2	20	5	50		90

^{*}Not all Actuator codes are factory assembled. If the assembly is no longer available but a close-off is shown on the tables above you may order the components that make up the assembly for field assembly. Note: Only bronze bodies listed. VBS-9263-0-4-P stainless steel bodies to -06 size are available with the same close off performance.

3-Wa	y 5/8" Globe Valv	es with Pneum	atic Act	uators	;																				
Positiv	re Positioner							AK-42	2309	-500								AŁ	<-423	09-500					
Actuat	or							Mk	(-269	0				Mł	<-460	1	M	K-461	1	MK	-462	1	MK-4	1621-	-422
Factor	y Actuator code (xx	x)				201			202			203			301			302		(303			313	
Spring	range (psig)				3	to 7		5	to 10)	8	to 13		3	3 to 6		5	to 10		10	to 13	3	10 1	to 11.	.25
Linkag	e							A۷	-740	0						AV-	401					AV-	430		
												Actu	ator o	lose-of	f pres	sure ra	ating (p	si) ^{ab}							
Supply	air pressure (psig)				15/20	15	20	15/20	15	20	15/20	15	20	15/20	15	20	15/20	15	20	15/20	15	20	15/20	15	20
Stem p	osition				SU	SD	SD	SU	SD	SD	SU	SU	SD	SU	SD	SD	SU	SD	SD	SU	SD	SD	SU	SD	SD
NPd	Valve assembly	Valve body	P code	Size																					
011-	VK-7312-xxx- 4-P	VB-7312-0-4-P	-2-4	F (O.)	5	100	75	60	50	135	95	5	85	35	250	250	130	220	240	250	30	170	-	-	-
SUc	VK-7332-xxx- 4-P	VB-7332-0-4-P	-2-3-4	5/8"				-			35	-	35			-				35	-	35	35	-	35

a - Close-off ratings for mixing valves: (SU = "A" port, SD = "B" port). The "A" port (SU) ratings equal pressure at Port "A" minus pressure at port "B". The "B" port (SD) ratings equal pressure at port "B" minus pressure at port "A". Close-off ratings in the table are true only when the indicated supply air pressure is applied to the actuator. A change in



air pressure at the actuator alters the actual close-off pressure.

b - Close-off pressure ratings describe only the differential pressure which the actuator can close off to standards with adequate seating force. Consult valve body specifications.

c - SU – Stem Up (Flow "B" to "AB"); SD – Stem Down (Flow "A" to "AB"); Normal Position Stem Up (Flow "B" to "AB").

d - NP = Normal Position.

1/2" to 2" 3-Way & Diverting/Sequencing with Pneumatic Actuators

3-Way & Diverting/Sequencing $\frac{1}{2}$ " to 2" Globe Valves with Pneumatic Actuators





E	Effective area						6 :	sq. In.								11	sq. Ir	١.			
	Linkage						ΑV	-7400								А	V-401				
Pos	itive Positioner						AK-42	2309-5	00							AK-4	2309-	500			
Factory assem	bly with Positive P	ositioner			No			Yes			Yes			No			Yes			Yes	
Actu	ator code (XXX)				201			202			203			301			302			303	
	Actuator						MŁ	<-2690					MŁ	(-460	1	MŁ	<-461	1	М	K-462	<u>'</u> 1
Spri	ng range (psig)			3	to 7		5	to 10		8	to 13		3	to 6		5	to 10		1	0 to 13	3
										Actuato	or clos	se-off	pressur	e ratir	ng ^{abc}						
Supply	air pressure (psig	1)		15/20	15	20	15/20	15	20	15/20	15	20	15/20	15	20	15/20	15	20	15/20	15	20
Si	em positiond			SU	SD	SD	SU	SD	SD	SU	SD	SD	SU	SD	SD	SU	SD	SD	SU	SD	SD
Valve assembly	Valve body	P code	Size in.										-								
		-2-4	1/2		150	150	50	60	170	100		90	30	250	250	100	150	250	250	35	200
VK-7313-XXX-4-P		-6	3/4		60	120	30	40	100	60		60	20	180	230	70	80	180	160	15	120
VK4-7313-XXX-4-P	VB-7313-0-4-P	-8	1		30	60	9	15	50	30		25	5	90	150	30	40	100	60	5	65
VK-7314-XXX-4-P VK4-7314-XXX-4-P	VB-7314-0-4-P	-9	11/4					8	30	15	_	15		50	90	15	25	60	40		40
VK4-7314-XXX-4-F		-10	1½			-		_	20	10		9	-	30	60	10	15	40	35	-	25
		-11	2	-					10	-		-		15	30	-	5	20	15		10
		-4	1/2																		
		-6	3/4																		
VK-7323-XXX-4-P	VB-7323-0-4-P	-8	1										250								
VK4-7323-XXX-4-P	12 . 320 0 4 1	-9	11/4										_50								

- a Close-off ratings for mixing or sequencing valves: (SU = "A", SD = "B" port). "A" port (SU) ratings equal pressure at port "A" minus pressure at port "B". "B" port (SD) ratings equal pressure at port "B" minus pressure at port "A". Close-off ratings in the table are true only when the indicated supply air pressure is applied to the actuator. A change in air pressure at the actuator alters the actual close-off pressure.
- b Close-off pressure ratings describe only the differential pressure which the actuator can close-off with adequate seating force. Consult valve body specifications for other limitations.
- c Mixing valves can be used in a diverting application but diverting valves can not be used in mixing applications.

11/2

d - SU - Stem Up; SD - Stem Down. Refer to the valve size and selection chart on page 70 for flow pattern, port designations and normal position.

More info

Scan the QR code or visit the link below for more information.



Visit: http://goo.gl/3ftGOA



11/2" to 2" 3-Way & Diverting/Sequencing with Pneumatic Actuator

3-Way & Diverting/Sequencing 11/2" & 2" Globe Valves with Pneumatic Actuators



									\checkmark			
Effect	tive area (stroke)							50 Sq.	In. (½")			
Linkag	je VB-7313-0-4-P							AV-	-430			
Linkag	e VB-7323-0-X-P							AV-	-430			
Pos	itive positioner							AK-42	309-500			
Factory assemb	oly with positive posit	ioner			No			Yes			Υ	'es
Actua	ator code (XXX)				611			612			6	13
	Actuator				MK-6601			MK-6611			MK-	6621
Sprir	ng range (psig)				3 to 8			5 to 10			8 t	o 13
							Actuat	or close-off p	ressure rating	g (psi) ^{abc}		
Supply	air pressure (psig)			15/20	15	20	15/20	15	20	15/20	15	20
St	em position ^d			SU	SD	SD	SU	SD	SD	SU	SD	SD
Valve assembly	Valve body	P code	Size in.						-			
VK-7313-XXX-4-P	VB-7313-0-4-P	-10	1½	40	170	250	80	110	230	170	30	160
VK4-7313-XXX-4-P	VB-7314-0-4-P	-11	2	20	90	160	50	60	120	90	15	90
VK-7323-XXX-4-P	VK-7323-XXX-4-P											
VK4-7323-XXX-4-P	VB-7323-0-4-P	-11	2					2	50			

a - Close-off ratings for mixing or sequencing valves: (SU = "A", SD = "B" port). "A" port (SU) ratings equal pressure at port "A" minus pressure at port "B". "B" port (SD) ratings equal pressure at port "B" minus pressure at port "A". Close-off ratings in the table are true only when the indicated supply air pressure is applied to the actuator. A change in air pressure at the actuator alters the actual close-off pressure.

- c Mixing valves can be used in a diverting application but diverting valves can not be used in mixing applications.
- d SU- Stem Up; SD- Stem Down. Refer to the valve size and selection chart on page 70 for flow pattern, port designations and normal position.



b - Close-off pressure ratings describe only the differential pressure which the actuator can close-off to standards with adequate seating force. Consult valve body specifications for other limitations.

MG350V Globe Valve NSR SpaceLogic Actuators

MG350V

MG350V globe valve actuators are non-spring return electromechanical actuators for the control of two-way and three-way globe valves for fan coils, unit ventilators, reheat, cooling units, perimeter heating, and other applications.

Proportional, Floating, and Pulse Width Modulated (PWM) models are available for direct mounting on $\frac{1}{2}$ " to 2" VB-7000 globe valves. The MG350V actuators are also compatible with older field installed $\frac{1}{2}$ " to $\frac{11}{4}$ " VB-9000 globe valves as well as other valves (with the addition of AV-800 Globe Valve Adapters).

Benefits

- Tri-color LED status indication for motion indication, auto calibration, and alarm notification
- Auto calibration provides precise control by scaling the Input signal to match the exact travel of the valve stem.
- Proportional models with and without a position output signal with field selectable 2 to 10 VDC and 0 to 10 VDC Input signals and selectable Input signal action (reverse or direct acting)
- Floating and Two-position models available with and without a position output signal
- Pulse width modulated (PWM) models with field-selectable 0.59 to 2.93 sec and 0.1 to 25.5 sec input signal ranges with a position output signal
- · Stall protected throughout stroke



VG350V









- Manual override with automatic release.
- Position feedback output signal models include field selectable 2...10 Vdc or 0...5 Vdc output signal.
- Removable wiring screw terminal with ½" conduit opening
- Integral linkage and self-adjusting valve position indicator

*The CE mark indicates RoHS2 compliance. Please refer to the CE Declaration of Conformity for additional details.

MG350V specifications

Input power and ratings

Part number	Input signal	Position feedback output signal	Approx. Timing in seconds for ½" (12.7 mm) stroke	Max. stroke in. (mm)	Force lbf (N)
MG350V-24F	Three-Wire Floating ¹	-	102		78 (350)
MGF350V-24FP	Three-Wire Floating, PWM 1, 2	2 to 10 VDC, 0 to 5 VDC3	51	21/32 (16.5)	67 (300)
MG350V-24M	2 to 10 VDC, 0 to 10 VDC,	-	102	21/32 (10.5)	78 (350)
MGF350V-24MP	4 to 20 mA 4	2 to 10 VDC, 0 to 5 VDC3	51		67 (300)

- 1 Also compatible with Two-position Form A 24 Vac/VDC Input signals.
- 2 Field-selectable 0.59 to 2.93 sec and 0.1 to 25.5 sec PWM ranges.
- 3 Field selectable. The 2 to 10 VDC output signal range also includes an alarm signal (see the MGF350V-24FP, MG350V-24M, and MGF350V-24FP, MG350V-24M).
- 24MP Alarm Operation table).

4 Field Selectable.

MG350V Actuator Models

Model	Valve assembly prefix	Actuator code	Force, lbf (N)	Approx. Timing in seconds for ½" stroke	Powera	Proportional inputb (VDC)	Proportional input° (VDC, mA)	Floating, two wire (Form A) two position	PWMd	Position output signale
MG350V-24F	1/5	110	79 (350)	102	5 VA			Yes		-
MGF350V- 24FP	VF	112	67 (300)	51		-	-	Yes	5	2 to 10 / 0 to 5 VDC
MG350V-24M	1/0	110	79 (350)	102	7.2 VA	Yes		-		
MGF350V- 24MP	VS	112	67 (300)	51		-	Yes	-		2 to 10 / 0 to 5 VDC

- a 24 Vac (Class 2 power supply), ±20%, 50/60 Hz, 20 to 29 VDC, 5 W; see the MG350V series installation instruction (F-27852) for more information.
- $b-DIP\ switch\ configurable\ 0\ to\ 10\ VDC\ or\ 2\ to\ 10\ VDC\ control\ input,\ (4\ to\ 20\ mA\ requires\ an\ externally\ mounted\ 500\ ohm\ resistor).$
- c DIP switch configurable 0 to 10 VDC, 2 to 10 VDC, or 4 to 20 mA control input.
- d DIP switch configurable 0.1 to 25.5 sec, 0.59 to 2.93 sec.
- e DIP switch configurable 2 to 10 VDC or 0 to 5 VDC.





SpaceLogic M400 M800 and M1500 NSR Actuators

M400A (VB) / M800A (VB) / M1500A (VB)

M400A (VB)/M800A (VB)/M1500A (VB) Series Non-Spring Return linear actuators are available in U-Bolt (Mx00A) and Screw Mount (Mx00A-VB) style for Schneider Electric globe valves with AV-821 linkage kits for mounting to VB-7000 valves. The Screw Mount style screws directly to the bonnet nut on VB-7000 valves (no adapter required). Applications include Chilled or hot water and steam.

Benefits

- Field-selectable input signals include reverse and direct-acting, floating or proportional plus
 proportional sequencing input signal ranges.
- Floating configuration controlled by a SPDT floating controller
- Proportional configuration 0 to 10, 2 to 10 VDC or 4 to 20 mA with the addition of a 500 ohm resistor (included)
- Direct/reverse action switch selectable
- Linear force: 90 lbf (400N), 180 lbf (800N), 337 lbf (1500N)
- Die-cast housing with plenum-rated plastic cover for NEMA 2 (IP54 vertical mount only) applications
- Manual override to allow positioning of valve
- Electronic valve sequencing and electronic flow curve (equal percentage or linear) selection
- Torque Overload protection throughout stroke
- Easy "One Touch" input signal/stroke calibration

Applicable literature

- Series Installation Instructions, F-27599
- VB-7000 Selection Guide, F-27490
- VB-8xxx/9xxx Selection Guide, F-27491
- AV-800 Series Linkage Adapters for Competitors Valves, F-27470
- AV-821 Linkage VB-7000, F-27701 (U-Bolt Style Only). AV-821 is required for the Mx00A but is not for the Mx00A-VB.
- AV-822 Linkage VB-8xxx, VB-9xxx, F-27702 (U-Bolt Style Only)
- CA-28 Control Valve Sizing, F-13755



Screw Mount Style

Specifications						
U-Bolt Style	M400A	M400A-S2	M800A	M800A-S2	M1500A	M1500A-S2
Screw Mount Style	M400A-VB	M400A-S2-VB	M800A-VB	M800A-S2-VB	M1500A-VB	M1500A-S2-VB
AC power			24 Vac	+- 10% 50-60 Hz		
DC power		20 to 29 \	/DC 20 W		20 t	o 29 VDC 30 W
Running VA		6		15		24
Transformer size VA		30		50		50
Floating control				Yes		
Proportional control		0 to 10 \	/DC, 2 to 10 VDC	or 4 to 20mA with 50	0 ohm resistor	
Feedback			2	2 to 10 VDC		
Force	90 lb	(400 N)	180	bf (800 N)	33	7 lbf (1500 N)
2-SPDT aux switch	No	24 Vac 4A res	No	24 Vac 4A res	No	24 Vac 4A res

Restrictions on ambient temperature for Valve Actuators

·	
Fluid temperature in Valve Body	Maximum Allowable Ambient Temperaturea
Chilled Water	122°F (50°C)
281°F (138°C)	113°F (45°C)
300°F (149°C)	107°F (42°C)
340°F (171°C)	100°F (38°C)

a - Minimum allowable ambient operating temperature 14°F (-10°C).



SpaceLogic M400 M800 and M1500 NSR Actuators

Specification	s (continued)					
	M800A, M1500A	U-Bolt style: >3/8" to 2" (9-52mm)				
Stroke	M800A-VB, M1500A-VB	Screw Mount Style >3/8" to 1 7/8" (9-48mm)				
	M400A, M400A-VB	U-Bolt and Screw Mount Style >3/8" to 1 1/4" (9-48mm)				
Stroke timing		Floating: 60 or 300 sec selectable, Proportional: 15 sec @1/2" stroke				
Feedback AO		2 to 10 VDC				
Power supply	type	Half Wave				
Motor type		Brushless DC				
Enclosure		NEMA 2 (IP 54, vertical mount only) with both conduit connectors used. NEMA 1 IP40 with one connector used				
Sound power	level	Maximum 32 dba				
Ambient temp	erature storage	-13 °F to 149 °F (-25 to 65 °C) ambient				
Ambient temperature operational		122 °F (50 °C) For chilled water applications 113 °F (45 °C) ambient at 281 °F (138 °C) Fluid temperature 107 °F (42 °C) ambient at 300 °F (149 °C) Fluid temperature 100 °F (38 °C) ambient at 340 °F (171 °C) Fluid temperature 90 °F (32 °C) ambient at 366 °F (186 °C) Fluid temperature				
Minimum ope	rating temperature	14 to 150 °F (-10 to 50 °C)				
Ambient humi	idity	15 to 95 % RH non-condensing				
Housing mate	rial	Die-Cast Aluminum				
Cover materia	l	UL94 plenum rated plastic				
Agency listing	js .	UL873, cULus, RCM, CE				


Restrictions on ambient temperature for Valve Actuators

Fluid temperature in valve body	Maximum allowable ambient temperature ^a
Chilled water	122°F (50°C)
281°F (138°C)	113°F (45°C)
300°F (149°C)	107°F (42°C)
340°F (171°C)	100°F (38°C)
366°F (186°C)	90°F (32°C)

a - Minimum allowable ambient operating temperature 14°F (-10°C).

Mounting

The actuator may be mounted horizontally, vertically, and in any position in between, but not upside down. Please note that to maintain NEMA 2 (IP54) rating the actuator must be mounted vertically.





SpaceLogic M900Axx-VB SR Actuators

Applications

Schneider Electric Spring Return and Non-Spring Return **SpaceLogic** M900AxxVB series linear actuators mount directly onto ½"...2" VB-7000 series and obsolete VB-9xxx ½"...1¼" 2-Way and 3-Way globe valve bodies. Applications include chilled or hot water and steam, NEMA 1 or 2 (M900Axx-VB) or NEMA 4 (M900AxW-VB) models. Field selectable input signals include reverse and direct acting, floating or proportional 0...1 Vdc, 2...10 Vdc or 4...20 mAdc and proportional sequencing input signal ranges.

Applicable Literature

- Schneider Electric SpaceLogic M900A Datasheet, F-27682
- SpaceLogic M900A Installation Instructions, F-27683
- AV-821 Installation Instructions, F-27701
- CA-28 Control Valve Sizing, F-13755

Valve and Actuator Selection Procedure

1. Determine the required flow coefficient (Cv/kvs).

Using the required flow and pressure drop for the application, determine the required flow coefficient (consult CA28, F-13755 if necessary).

2. Determine valve body part number.

Select a 2-Way valve body from section 1.0 VB-7000 Valve Bodies having the required flow coefficient, size, body pattern, end connection, and temperature/pressure ratings appropriate for the application. Determine the desired loss of power position of the valve (M900AR-VB Spring retract, M900AE-VB Spring extend).

3. Select the SmartX Actuator and appropriate spring-return action.

Using the required close-off pressure for the application and the appropriate spring-return action, select a **SpaceLogic** actuator having sufficient close-off pressure on the valve body selected in step 2. Additional **SpaceLogic** actuator specifications may be found in Actuators and Linkages.

4. Determine the Assembly Part Number

If a complete factory valve and actuator assembly is required, consult the actuator code of the **SpaceLogic** actuator selected in Step 3. For the complete assembly part number:


- Change the valve body part number prefix from VB to VU.
- Insert the actuator code in the third field of the part number.
- · Confirm the factory assembly is available.

Example:

- Valve Body: VB-7253-0-4-4
- Actuator: M900AR-VB
- Complete Assembly: VU-7253-650-4-4

Note: Not available as a factory assembly, order the valve body and actuator for field assembly.


SpaceLogic actuators are field configured for the desired control signal type and range plus the desired action. Consult the appropriate **SpaceLogic** Installation Instructions for further information.



SpaceLogic M900Axx(-VB) SR & VB-7000 Valve Selection

Not all valve body and actuator combinations are available factory-assembled. Some combinations must be field-assembled. Select a Valve Actuator combination having sufficient close off for the application.

Select VB-7000 Valve / M900Axx(-VB) ^a Spring Return Actuator							
Valve Body ^{ac}	Valve Action	P-Code	Size	Close-off Ratings PSI M900Axx ^b			
VB-7211-0-3-P		1, 2, 3, 4	1/2"	250			
VB-7211-0-4-P		5, 6	3/4"	250			
VB-7212-0-4-P		7, 8	1"	180			
VB-7214-0-4-P	Stem up Open	9	1 1/4"	110			
VB-7213-0-4-P VB-7253-0-4-P		10	1 ½"	75			
VB-7273-0-4-P		11	2"	40			
		1, 2, 3, 4	1/2"	250			
VB-7221-0-4-P		5, 6	3/4"	250			
VB-7222-0-4-P VB-7224-0-4-P		7, 8	1"	180			
VB-7223-0-4-P	Stem up Closed	9	1 1/4"	110			
VB-7263-0-4-P		10	1 ½"	75			
VB-7283-0-4-P		11	2"	40			
		2, 4	1/2"	250			
		6	3/4"	250			
VB-7312-0-4-P		8	1"	180			
VB-7313-0-4-P VB-7314-0-4-P	3 Way Mixing	9	1 1/4"	110			
13 1011 0 11		10	1 ½"	75			
		11	2"	40			
		4	1/2"	250			
		6	3/4"	250			
		8	1"	250			
VB-7323-0-4-P	3 Way Diverting	9	1 1/4"	250			
		10	1 ½"	250			
		11	2"	250			
VBS-9263-0-4-P	Stem Up	1-7, 31-39	1/2"	250			
. 20 0200 0 . 1	Closed	5, 6, 45	3/4"	250			



a - Substitute VU- for VB- and add the actuator code 650 (M900AR-VB) or 660 (M900ARW-VB) to substitute for the -0-b - M900Axx-VB or M900Axx Styles c - Not all valve styles are available in all sizes or "P" codes.

SpaceLogic M900A Factory & Field Assembly SR Models

	Spring Return SpaceLogic Factory Assemblies Model Table									
Model	Actuator Code	Force	Power	Running Watts	Transformer Size	Floating Control ^a	Proportional Control ^b	Feedback Voltage ^a	(2) SPDT Aux Switches ^c	Spring Return Action
M900AR-VB	650	157 lbf	24 Vac 50/60 Hz		50.1/		01 Vdc,	210 Vdc or		
M900ARW- VB	660	(700 N)	2030 Vdc 1.5 A	21	50 Va	Yes	210 Vdc, 420 Ma	0-5 Vdc	No	Retract

	Spring Return SpaceLogic Actuators for Field Assembly									
Model	VB-7000 Mounting Kit Required	Force	Power	Running Watts	Transformer Size	Floating Control ^a	Proportional Control ^b	Feedback Voltage ^a	(2) SPDT Aux Switches ^c	Spring Return Action
M900AR	AV 004									Retract
M900AE	AV-821							210 Vdc or 0-5 Vdc		Extend
M900AR-VB	None		24 Vac 50/60 Hz				0 10 V/do		No	
M900ARW	AV-821	157 lbf (700 N)	2030	21	50 Va	Yes	010 Vdc, 210 Vdc, 420 Ma			Retract
M900ARW-VB	None		Vdc 1.5 A							
M900ARW-S2	A) / OO4								.,	Retract
M900AEW-S2	AV-821								Yes	Extend

a - Dip switch selectable.

Note: When installing valve and actuator assemblies, observe the minimum and maximum fluid and ambient temperature limits shown .



a - Dip switch selectable.
b - 0...5, 2...6 or 5...10, 6...10 also selectable by dip switch.
c - S2 auxiliary switches may be added in the field order 880 0104 000.
NOTE: Suffix W= NEMA 4 Weather

b - 0...5, 2...6 or 5 ...10, 6...10 also selectable by dip switch.
c - S2 auxiliary switches may be added in the field. Order 880 0104 000.
NOTE: Suffix W= NEMA 4 Weather

Mx51-710x 105 lbf Linear SR SmartX Actuators

Mx51-7103 Series **SmartX Actuators** 24 Vac 105 lbf (467 N)

MA51-7100 MA51-7101 **SmartX Actuators** 120 Vac/230 Vac 105 lbf (467 N)















the link below for more information.

More information: Scan the QR code or visit



Visit: http://goo.gl/amkgWe

Connection	3 ft. (0.9 m) plenum cable					
Housing		Polymer, NEMA 2				
Dimensions	6-5/16 x 6	6¾ x 3½ (160 x 170 x 90 mm)				
Position indicator		Visual indicator				
Override		Manual				
Control signal	MA51-7103-100 MF51-7103-100 MF51-7103-100: 2 to 10 VDC MS51-7103-130: 6 to 9 VDC MS51-7103-140: 6 to 9 VDC MS51-7103-150: 0 to 10 VDC MS51-7103-150: 0 to 10 VDC MS51-7103-160: 4 to 20 mAdc The Control signal is factory set for direct action. It can be field-adjusted for reverse action.	2-position SPST				
Voltage	24 Vac ± 20%, 20 to 30 VDC	MA51-7100: 120 Vac ± 10% MA51-7101: 230 Vac ± 10%				
VA@60 HZ	MA51-7103-100: 5.3 MF51-7103-100: 6.9 MS51-7103-100: 6.6	MA51-7100: 7.9 MA51-7101: 7.4				
Watts @ 60 Hz	4.7	MA51-7100: 6.2 MA51-7101: 5.4				
Auxiliary switch		None				
Timing (seconds)	MA: Powered approx. 27 spring return approx. 19 MF/MS: Powered <60 spring return <16	Powered approx. <27 spring return approx. <19				
Feedback	For voltage ranges, feedback & input signal ranges are the same. 4 to 20 mA input range has a 2 to 10 VDC position feedback signal. MS51-7103-140 has no feedback output. MF51-7103-100 has a 2 to 10VDC output.	None				
Installation instructions		F-27169				

Mx51-720x 220 lbf Linear SR SmartX Actuators

Mx51-7203 Series SmartX Actuators 24 Vac 220 lbf (979 N) MA51-7200 MA51-7201 SmartX Actuators 120 Vac/230 Vac 220 lbf (979 N)







Connection	3 ft.	(0.9 m) plenum cable		
Housing	Alum	inum die-cast, NEMA 2		
Dimensions	7 x 10-5/8	x 2-9/16 (178 x 270 x 65 mm)		
Position indicator		Visual indicator		
Override		Manual		
Control signal	MA51-7203: 2-position SPST MF51-7203: 2 to 10 VDC MS51-7203: 2 to 10 VDC MS51-7203-040: 6-9 VDC MS51-7203-050: 0 to 10 VDC The Control signal is factory set for direct action. It can be field-adjusted for reverse action.	MA51-7200: 2-position SPST		
Voltage	24 Vac ± 20%, 22 to 30 VDC	MA51-7200:120 Vac ± 10% MA51-7201: 230 Vac ± 10%		
VA@60 HZ	9.7	MA51-7200: 10 MA51-7201: 10.6		
Watts @60 Hz	MA51-7203: 7.5 MF51-7203: 7.7 MS51-7203: 7.4	MA51-7200: 8.4 MA51-7201: 8.5		
Auxiliary switch		None		
Timing (seconds)	Powered <100 Spring return <35			
Feedback	MA51 & MF51: None MS51: 2 to 10 VDC only The MS51-7203-040 does not have a feedback output.	None		
Installation	1	F-27120		

Mx40-704x 35 lb-in SR SmartX Actuators

Mx40-704x Series SmartX Actuators 24 Vac 35 lb-in (4 N-m)









Specifications

Connection	3 ft. (0.9 m) plenum cable
Rotation	Aluminum die-cast, NEMA 2
Control action	7 x 10-5/8 x 2-9/16 (178 x 270 x 65 mm)
Shaft size	Visual indicator
Housing	Manual
Dimensions	MA51-7203: 2-position SPST MF51-7203: Floating MS51-7203: 2 to 10 VDC MS51-7203-040: 6-9 VDC MS51-7203-050: 0 to 10 VDC The Control signal is factory set for direct action. It can be field-adjusted for reverse action. MA51-7200: 2-position SPST
Overload protection	24 Vac ± 20%, 22 to 30 VDC MA51-7200:120 Vac ± 10% MA51-7201: 230 Vac ± 10%
Angle of rotation	9.7 MA51-7200: 10 MA51-7201: 10.6

Position indicator	MA51-7203: 7.5 MF51-7203: 7.7 MS51-7203: 7.4
. comon maioator	MA51-7200: 8.4
	MA51-7201: 8.5
Built-in Auxiliary switch	None
Override	Powered <100 Spring return <35
Linkages	MA51 & MF51: None MS51: 2 to 10 VDC only The MS51-7203-040 does not have a feedback output. None
Installation instructions	F-27120
Regulatory compliance	c-UL-us LISTED for safety per UL 873 and CAN C22.2 No.24-93. CE mark compliant per EU directives LVD, EMC, and RoHS2. AUS/NZ marked RCM.

Electrical Specifications

	Actuator Inputs			Outputs		Approx. Timing	g (sec)	Weight lbs (kg)
Part Number	Control	Voltage	VA @ 60 Hz	Feedback	Auxiliary Switch	Powered	Spring Return	
MA40-7043	0. D:#:		4.4		No	-50		
MA40-7043-501	2-Position	4.4		One	<50	<26		
MF40-7043	·		5.9	None	No			
MF40-7043-501	Floating	24 Vac ± 20% 22-30 Vdc			One			4.3
MS40-7043	Proportional		5.6	210 Vdc	No	<130		(1.9)
MS40-7043-501	210 Vdc 420 mAa				One		<25	
MS40-7043-MP ^a	Proportional		6.6	None	No			
MS40-7043-MP5 ^a	69 Vdc			ivone	One			

a - Provides auxiliary power supply +20 Vdc 25 mA maximum.

Application

The AM-708 500 ohm resistor converts a 4 to 20 mA signal to a 2 to 10 VDC signal.

- Actuators: MS40-7043, MS41-7073, MS41-7153, MS40-717x, MS41-6083, MS41-6153 and MS41-6343.
- Wire leads.





Mx40-704x 35 lb-in SR SmartX Actuators

nputs									
Control signal	MA40-704x – ON/OFF SPST control contacts or Triacs (500 mA rated) MS40-7043 – Proportional, 2 to 10VDC or 4 to 20 mAdc with 500 Ω resistor. MS40-7043-MP/-MP5 – Proportional 6 to 9 VDC. MF40-7043 – Floating point control, 24 Vac.								
	All 24 Vac circuits are Class 2.								
				Run	nning		Holding		
	Part Number®	Voltage 50/60 Hz	50	Hz	60	60 Hz		60 Hz	
	raitivuilibei	30/00 112	VA	W	VA	W	W	W	
	MA40-7043		4.4	2.9	4.4	2.9	0.8	0.8	
	MS40-7043		5.6	4.2	5.6	4.2	2.4	2.4	
ower requirements	MF40-7043	24 Vac ± 20%	5.9	4.4	5.9	4.4	2.9	2.9	
	MS40-7043-MP								
	MS40-7043-MP5		6.9	5.0	6.6	5.0	3.2	3.2	
	MA40-7040	120 Vac ± 10%	6.4	3.8	4.3	3.4	1.6	1.2	
	MA40-7041	230 Vac ± 10%	5.8	4.1	4.6	3.9	1.5	1.2	
	a - See Auxiliary switches under Electrical below.								
onnections	MA40-704x and MA40- For M20 Metric conduit MF40-7043 and MF40-	704x-501 – 3 ft. (0.9 m) lor , use AM-756 adapter. 7043-501, MS40-7043 and	MS40-70	43-501 – 3				ed cables	
Connections	MA40-704x and MA40- For M20 Metric conduit MF40-7043 and MF40-	704x-501 – 3 ft. (0.9 m) lor , use AM-756 adapter.	MS40-70	43-501 – 3				ed cables	
Connections Motor type	MA40-704x and MA40- For M20 Metric conduit MF40-7043 and MF40- ½" conduit connector. F	704x-501 – 3 ft. (0.9 m) lor , use AM-756 adapter. 7043-501, MS40-7043 and for M20 Metric conduit, us	MS40-70	43-501 – 3				ed cables	
	MA40-704x and MA40- For M20 Metric conduit MF40-7043 and MF40- %" conduit connector. f MA40-704x – Brush. MF40-7043, MS40-704 Auxiliary switches: One @ 24 Vac, adjustable 0 One Auxiliary switch av adjustable 0 to 95° (0 to Position Feedback volt: position feedback or or Control Mode: Switch p control mode on propoi Timing: MA40-704x - Aj	704x-501 – 3 ft. (0.9 m) lor, use AM-756 adapter. 7043-501, MS40-7043 and for M20 Metric conduit, us 3 – Brushless DC. Auxiliary switch available to 95° (0 to 1 scale). Switch ailable with MA40-7040-51 scale). Switch meets VI age "AO" (MS40- model or ceration of up to four slave rovided for selection of dir	with Mx40 h meets VI of or MA4 DE require actuators. ect acting	43-501 – 3 adapter. 1-7043-50 DE require 0-7041-50 ments for 0 VDC (ma or reverse 3 - Appro	1 and MS. ements for 11, SPDT 6 6 (1.5)A, 2 aximum 0. e acting x. 130 sec.	40-7043- 6 (1.5)A, A resistiv 250 Vac. 7 mA) out	MP5, SPD 24 Vac. re @ 250 V	T 6A resi	
Motor type Dutputs:	MA40-704x and MA40-For M20 Metric conduit MF40-7043 and MF40-7%" conduit connector. F. MA40-704x – Brush. MF40-7043, MS40-704 Auxiliary switches: One @ 24 Vac, adjustable 0 One Auxiliary switch avadjustable 0 to 95° (0 tc Position Feedback voltposition feedback or op Control Mode: Switch p control mode on propor Timing: MA40-704x - Al Auxiliary Power Supply Stroke: Angle of rotation Output torque rating: M	704x-501 – 3 ft. (0.9 m) lor, use AM-756 adapter. 7043-501, MS40-7043 and for M20 Metric conduit, us 3 – Brushless DC. Auxiliary switch available to 95° (0 to 1 scale). Switch ailable with MA40-7040-51 of scale). Switch meets VI age "AO" (MS40- model or beration of up to four slave rovided for selection of dirtional models. pprox. 50 sec. MF40- and	with Mx40-70 e AM-756 with Mx40-70 n meets Vloat of the require lity): 2 to 10 actuators. ect acting MS40-704 0-7043-M	43-501 – (adapter. 0-7043-50 DE require 0-7041-50 ments for 0 VDC (ma or reversi 3 - Appro P5 +20 V	1 and MS- ements for object of the following of the follo	40-7043- 6 (1.5)A, 6 A resistiv 250 Vac. 7 mA) out	MP5, SPD 24 Vac. ve @ 250 V	T 6A resi /ac, I for	
Motor type Dutputs: Electrical	MA40-704x and MA40-For M20 Metric conduit MF40-7043 and MF40-7%" conduit connector. ff MA40-704x – Brush. MF40-7043, MS40-704. Auxiliary switches: One @ 24 Vac, adjustable 0 One Auxiliary switch avadjustable 0 to 95° (0 to Position Feedback Voltposition Feedback vor op Control Mode: Switch pontrol mode on propor Timing: MA40-704x - Al Auxiliary Power Supply Stroke: Angle of rotation Output torque rating: MPosition indicator: Visual	704x-501 – 3 ft. (0.9 m) lor, use AM-756 adapter. 7043-501, MS40-7043 and for M20 Metric conduit, us 3 – Brushless DC. Auxiliary switch available to 95° (0 to 1 scale). Switch ailable with MA40-7040-50 at 1 scale). Switch meets VI age "AO" (MS40- model or beration of up to four slave rovided for selection of dirtional models. approx. 50 sec. MF40- and MS40-7043-MP and MS40-7043 51b-in (4 N-m) al indicator with a scale nu 40 to 160 °F (-40 to 71 °C)	with Mx40-70.e AM-756 with Mx40-70.e AM-756 with Mx40-70.1 or MA4 DE require hely): 2 to 10.actuators. ect acting MS40-704.0-7043-M o-7043-M of 95°, with	43-501 – (adapter. 0-7043-50 DE require 0-7041-50 ments for 0 VDC (ma or reversi 3 - Appro P5 +20 V	1 and MS- ements for object of the following of the follo	40-7043- 6 (1.5)A, 6 A resistiv 250 Vac. 7 mA) out	MP5, SPD 24 Vac. ve @ 250 V	T 6A resi /ac, I for	
Motor type Dutputs: Electrical	MA40-704x and MA40-For M20 Metric conduit MF40-7043 and MF40-7%" conduit connector. f MA40-704x – Brush. MF40-7043, MS40-704 Auxiliary switches: One 24 Vac, adjustable 0 One Auxiliary switch avadjustable 0 to 95° (0 to Position Feedback or op Control Mode: Switch position feedback or op Control Mode: Switch potentrol mode on propor Timing: MA40-704x – Al Auxiliary Power Supply Stroke: Angle of rotation Output torque rating: MPosition indicator: Visual Shipping and storage:	704x-501 – 3 ft. (0.9 m) lor, use AM-756 adapter. 7043-501, MS40-7043 and for M20 Metric conduit, us 3 – Brushless DC. Auxiliary switch available to 95° (0 to 1 scale). Switch ailable with MA40-7040-51 t scale). Switch meets VI age "AO" (MS40- model or peration of up to four slave rovided for selection of dirtional models. pprox. 50 sec. MF40- and the MS40-7043-MP and MS40-7043-MP and MS40-7043-Bb-in (4 N-m) al indicator with a scale nu 40 to 160 °F (-40 to 71 °C) F (-30 to 60 °C).	with Mx40-70.e AM-756 with Mx40-70.e AM-756 with Mx40-70.1 or MA4 DE require hely): 2 to 10.actuators. ect acting MS40-704.0-7043-M o-7043-M of 95°, with	43-501 – (adapter. 0-7043-50 DE require 0-7041-50 ments for 0 VDC (ma or reversi 3 - Appro P5 +20 V	1 and MS- ements for object of the following of the follo	40-7043- 6 (1.5)A, 6 A resistiv 250 Vac. 7 mA) out	MP5, SPD 24 Vac. ve @ 250 V	T 6A resi /ac, I for	



Mx41-7073 60 lb-in SR SmartX Actuators

Mx41-7073 Series SmartX Actuators 24 Vac 60 lb-in



Specifications

Torque	60 lb-in (7 N-m) minimum
Connection	3 ft. (0.9 m) cable, ½" conduit connectors
Rotation	CW or CCW spring return using reverse mounting
Control action	Direct/reverse signal selection (MS41- only)
Shaft size	%" (19 mm) diameter, ½" (13 mm) square
Housing	NEMA 1, NEMA 2 (IEC IP54) with conduit connector in the down position
Dimensions	10½ x 4 x 3½" (287 x 100 x 89 mm)
Overload protection	Throughout rotation
Angle of rotation	93° nominal
Position indicator	Pointer and scale
Built-in Auxiliary switch	2-SPDT 7A on MA41-7073-502, MF41-7073-502, MS41-7073-502 only
Override	Manual
Motor type	All brushless DC except MA41-7073-brush
Linkages	AV-602
Installation instructions	MA41-7073: F-26642, MF41-7073: F-26644, MS41-7073: F-26645
Regulatory compliance	c-UL-us LISTED for safety per UL 873 and CAN C22.2 No.24-93. CE mark compliant per EU directives LVD, EMC, and RoHS2. AUS/NZ marked RCM.

Norioz. Add/Nz markeu Now.

Electrical specifications

Don't November		Actuator inputs			Outputs		Approx. Timing in seconds	
Part Number	Control	Voltage	VA @ 60 Hz	Feedback	Auxiliary switch	Powered	Spring Return	lbs (kg)
MA41-7073	2-Position		4.8		No	<80	<40	6.8 (3.1)
MA41-7073-502	2-F05111011	24 Vac + 20%	4.0	None	Two	~00	~40	7.0 (3.2)
MF41-7073	Floating		6.2		No			6.5 (2.9)
MF41-7073-502	24 Vac	22-30 VDC	0.2		Two			7.0 (3.2)
MS41-7073	2 to 10 VDC	5.8		2 to 10 VDC	No	<195	<30	6.5 (2.9)
MS41-7073-502	4 to 20 mAdca		5.8		Two			7.0 (3.2)

Application

The AM-708 500 ohm resistor converts a 4 to 20 mA signal to a 2 to 10 VDC signal.

- Actuators: MS40-7043, MS41-7073, MS41-7153, MS40-717x, MS41-6083, MS41-6153 and MS41-6343.
- Wire leads.





Mx41-707x/715x 60/133 lb-in SR SmartX Actuators

Mx41-707x & Mx41-715x Series SmartX Actuators 24 to 230 Vac 60/133 lb-in









Spring Return Actuator

Control signal	MF41-7073, MF41-7153	x – ON/OFF SPST control i – Floating point control, 2 3 – Proportional, 2 to 10 V	24 Vac.	,		,		
	All 24 Vac circuits are 0	Class 2.						
				Rur	nning		Hol	ding
	Part Number	Voltage 50/60 Hz	50	Hz	60	Hz	50 Hz	60 Hz
			VA	W	VA	W	W	W
	MA41-7153-xxx		9.8	7.5	9.7	7.5	2.8	2.8
	MS41-7153-xxx	24 Vac ± 20%	9.8	7.4	9.7	7.4	2.9	2.9
Power requirements	MF41-7153-xxx		9.8	7.7	9.7	7.7	3.3	3.3
ower requirements	MA41-7150-xxx	120 Vac ± 10%	11.7	8.8	10.0	8.4	3.6	5.0
	MA41-7151-xxx	230 Vac ± 10%	15.5	9.5	10.6	8.5	4.6	3.3
	MA41-7073-xxx		4.8	3.2	4.8	3.2	0.8	0.8
	MS41-7073-xxx	24 Vac ± 20%	5.8	4.6	5.8	4.6	2.3	2.3
	MF41-7073-xxx		6.2	4.8	6.2	4.8	2.8	2.8
	MA41-7070-xxx	120 Vac ± 10%	10.7	4.2	5.6	3.6	2.0	1.2
	MA41-7071-xxx	230 Vac \pm 10%	17.0	5.1	8.0	4.0	2.7	1.4
Connections	3 ft. (0.9 m) long applia	ince cable, ½" conduit co	nnectors. Fo	or M20 m	etric cond	uit, use A	M-756 ada	apter.
Motor type	MA41-707x – Brush. MA41-715x, MF41-7073	3, MF41-7153, MS41-7073	, MS41-7153	3 – Brushl	ess DC.			
Electrical	Vac, one fixed @ 5° and Position Feedback Volt or operation of up to fo	provided for selection of d pprox. 80 sec. Approx. 195 sec.	2. Switches ronly): 2 to 10	meet VDE I VDC (ma	requireme aximum 0.5	ents for 7 5 mA) out	(2.5)A, 24 put signal	Vac. for position feedb
Mechanical	Output torque rating: N Position indicator: Visu	n is limited to a maximum lx41-707x- 60 lb-in (7 N-m al indicator with a scale n ion is adjustable from -5°	n). Mx41-715 umbered fro	ix- 133 lb om 0 to 90	in (15 N-m)°, provide	d for Pos	ition indic	ation.
Environment temperature limits Humidity	Shipping and storage: Operating: -22 to 140 ° 5 to 95% RH, non-cond		c) ambient.					
Location	NEMA Type 2 (IEC IP54	4) with conduit connector	in the down	position.				
Regulatory compliance	RoHS and REACh							

Mx40-717x 150 lb-in SR SmartX Actuators

Mx40-717x Series SmartX Actuators 150 lb-in (17 N-m)



Spring Return Actuator

Specifications

Connection	2 ft. (61 cm) Appliance cable, ½" conduit connectors
Rotation	CW or CCW spring return using reverse mounting
Shaft size	Standard: 3/8 to ½" (10 to 13 mm) round or square Optional: 1.05" (25.1 mm) diameter, 5/8" (15.9 mm) square
Housing	NEMA 1, NEMA 4 (IEC IP56) with customer-supplied water-tight connector
Dimensions	10-7/8 x 4 x 4" (276 x 100 x 100 mm)
Overload protection	Throughout rotation
Angle of rotation	93° nominal
Position indicator	Visual indicator
Built-in auxiliary switches	None
Override	None
Motor type	Brushless DC
Linkages	AV-602
Installation instructions	MA40-717x: F-26742, MF40-7173: F-26749, MS40-717x: F-26748
Regulatory compliance	c-UL-us LISTED for safety per UL 873 and CAN C22.2 No.24-93. CE mark compliant per EU directives LVD, EMC, and RoHS2. AUS/NZ marked RCM.

Electrical specifications

Part		Actuator inputs		Out	tputs	Approx. Timing	in seconds	Weight
number	Control	Voltage	VA @ 60 Hz	Feedback	Auxiliary switch	Powered	Spring Return	lbs (kg)
MA40-7170	O Desiries	120 Vac ± 10%	11.4					
MA40-7173	2-Position	0414 . 0004	9.6					
MF40-7173	Floating	24 Vac ± 20%	10.0	None	No	<16	2	10.5
MS40-7170a	2 to 10 VDC 4 to 20 mA ^b	120 Vac ± 10%	11.1	None	110	10		(4.8)
MS40-7173	2 to 10 VDC	24 Vac ± 20%	9.4					
MS40-7171		240 Vac ± 10%						

a - The CE directive is not applicable to this model.

Application

The AM-708 500 ohm resistor converts a 4 to 20 mA signal to a 2 to 10 VDC signal.

- Actuators: MS40-7043, MS41-7073, MS41-7153, MS40-717x, MS41-6083, MS41-6153 and MS41-6343.
- Wire leads.





b - With the addition of a 500 ohm resistor.

Mx41-6043 44 lb-in NSR SmartX Actuators

Mx41-6043 Series SmartX Actuators 24 Vac 44 Ib-in (5 N-m)



Non-Spring Return Actuator

Specifications

Connection	3 ft. (0.9 m) 18 AWG leads, Plenum rated
Rotation	90° CW or CCW field selectable
Shaft size	3/8 to 5/8" (10 to 15.9 mm) diameter, 1/4 to ½" (6.4 to 13 mm) square, 9/16" (14.3 mm) hex
Housing	NEMA 2, (IP54 to EN60529) with conduit in the down position
Dimensions	5-7/16 x 2\% x 3-3/8" (140 x 70 x 60 mm)
Overload protection	Throughout rotation
Angle of rotation	90° nominal (field-adjustable to limit travel on either end of stroke)
Position indicator	Adjustable pointer
Built-in auxiliary switches	(Use MF41-6083-502 and MS41-6083-502 models with Auxiliary switches.)
Operating temperature limits	-25 to 130°F (-32 to 55°C)
Override	Manual
Linkages	AV-611
Installation instructions	MF41-6043: F-27213, MS41-6043: F-27214
Regulatory compliance	c-UL-us LISTED per UL 873 and CAN C22.2 No.24-93. CE compliant to directives LVD, EMC, and RoHS2.

Electrical specifications

		Actuator inputs		Outputs	Approximate Timing	
Part number	Control	Voltage	VA @ 60 Hz	Feedback	in seconds	Weight lbs (kg)
	Control	voltage	VA @ 00 112	reedback	Powered	
MF41-6043	Floating	24 Vac	2.3	None	<90	1.06 (0.5)
MS41-6043	0 to 10 VDC	+20% -15%	2.5	0 to 10 VDC	- \90	1.00 (0.3)

Mx41-6083 88 lb-in NSR SmartX Actuators

Mx41-6083 Series SmartX Actuators 24 Vac 88 lb-in (10 N-m)



Non-Spring Return Actuator

Specification

Connection	3 ft. (0.9 m) 18 AWG leads, Plenum rated
Rotation	90° CW or CCW field selectable
Shaft size	3/8 to 5/8" (10 to 15.9 mm) diameter, 1/4 to ½" (6.4 to 13 mm) square, 9/16" (14.3 mm) hex
Housing	NEMA 2, (IP54 to EN60529) with conduit in the down position
Dimensions	5-7/16 x 2\% x 3-3/8" (140 x 70 x 60 mm)
Overload protection	Throughout rotation
Angle of rotation	90° nominal (field-adjustable to limit travel on either end of stroke)
Position indicator	Adjustable pointer
Built-in auxiliary switches	Two SPDT on MF41-6083-502, MS41-6083-522, MS41-6083-502 only
Operating temperature limits	-25 to 130°F (-32 to 55°C)
Override	Manual
Linkages	AV-611
Installation instructions	MF41-6083: F-27213, MS41-6083: F-27214
Regulatory compliance	c-UL-us LISTED per UL 873 and CAN C22.2 No.24-93. CE compliant to directives LVD, EMC, and RoHS2.
oomphanoo	of sompliant to an obtained by St. Elmot, and Norther

Electrical Specifications

		Actuator inputs		Out	puts	Approximate	Weight lbs
Part number	Control	Voltage	VA @ 60 Hz	Feedback	Auxiliary	Timing in seconds	(kg)
	Control	voltage	VA @ 00112	reeuback	switch	Powered	
MF41-6083	Flantin		0.0	None	No		
MF41-6083-502	Floating	24 Vac	2.3	None	Two	105	4.00 (0.5)
MS41-6083	0 to 10 VDC	+20% -15%	2.2	0 to 10 VDC	No	<125	1.06 (0.5)
MS41-6083-502	0 to 10 VDC		3.3	0 to 10 VDC	Two	1	



Mx41-6153 133 lb-in NSR SmartX Actuators

Mx41-6153 Series SmartX Actuators 24 Vac 133 lb-in (15 N-m)







Non-Spring Return Actuator

Specifications

•	
Connection	3 ft. (0.9 m) 18 AWG leads
Rotation	CW or CCW through reverse mounting
Shaft size	$3/8$ to $3\!\!/\!\!^{\rm u}$ (6.4 to 19 mm) diameter, $1\!\!/\!$
Housing	NEMA 1, (IP54 to EN60529)
Dimensions	8-3/8 x 31/4 x 2-2/3" (210 x 80 x 70 mm)
Overload protection	Throughout rotation
Angle of rotation	90° nominal (field-adjustable to limit travel on either end of stroke)
Position indicator	Adjustable pointer
Built-in auxiliary switches	Two SPDT on MS41-6153-502 only
Operating temperature limits	-25 to 130°F (-32 to 55°C)
Override	Manual
Linkages	AV-611
Installation instructions	F-27215
Regulatory compliance	c-UL-us LISTED per UL 873 and CAN C22.2 No.24-93. CE compliant to directives LVD, EMC, and RoHS2.

Electrical specifications

		Actuator inputs		Outp	outs	Approximate Timing	
Part number	Control	Voltage	VA @	Feedback	Auxiliary	in seconds	Weight lbs (kg)
	Control	voltage	60 Hz	reeuback	switch	Powered	
MF41-6153	Floating			None	No		
MS41-6153	040.1/00	24 Vac +20% -15%	3.0	0.1.403//00	110	<125 (60 Hz)	2.2 (1)
MS41-6153-502	0 to 10 VDC	. 2070 -1070		0 to 10 VDC	2		




Globe Valves and Actuators

AV-602 Linkage

Application

The AV-602 links Schneider Electric rotary actuators to 1" to 2" VB-7000 globe valves.

AV-602 Actuator/Valve combinations					
Actuator	Factory - Assemble Valve sizes 2-Way & 3-Way	Field - Assembled to VB Valve Bodies 2-Way & 3-Way			
Mx41-707x Mx41-715x Mx40-717x	1½ to 2"	1 to 2"			




AV-602 Globe Linkage

Specifications

Motor mounting: In any upright position with the motor above center the line of the valve body.

Actuator/valve combinations					
Actuator	Globe Valve	SR			
Mx41-707x	1 to 2"				
Mx41-715x	11/4" to 2"	SR (Spring Return)			
Mx40-717x	1½ to 2"				



Typical Actuator/Linkage Mounting

Globe Valves and Actuators

AV-611 Linkage


Application

The AV-611 linkage connects SmartX Actuator Mx4x-60x3 or 6153 non-spring return and Mx40-704x spring return actuators (listed below) to ½" to 2" VB-7000 and ½" to 1¼" discontinued VB-9xxx 2-Way and 3-Way globe valves.

Applicable literature

- Mx41-6043, Mx41-6083 Series non-spring return Actuator installation instructions, F-27213.
- Mx41-6153 Series Non-spring return Actuator installation instructions, F-27215.
- MA40-704x, MA4x-707x, MA4x-715x Series spring return Actuator installation instructions, F-26642.
- MF40-7043, MF4x-707x, MF4x-715x Series spring return Actuator installation instructions.
- Vx-7000 & Vx-9000 Series Mx41-6xxx & Mx4x-7000 Series Linked Globe Valve Assemblies Selection Guide, F-26752.

Actuators					
Actuator	Description	Size			
MF41-6043	Floating 44 lb-in non-spring return	½" to 2"			
MS41-6043	Proportional 44 lb-in non-spring return	72 10 2			
MF41-6083	4" 4 0"				
MS41-6083	Proportional 88 lb-in non-spring return	1" to 2"			
MF41-6153	Floating 133 lb-in non-spring return	1½" to 2"			
MS41-6153	Proportional 133 lb-in non-spring return	1/2 10 2			
MA40-704x	Two-position 35 lb-in spring return				
MF40-7043	Floating 35 lb-in spring return ½				
MS40-7043	Proportional 35 lb-in spring return				





AV-611 SmartX Actuator Globe Linkage

Note: The AV-611 linkage is also compatible with the actuators above with the A

Linkage Kits for Field Mounting Globe Valve Actuators

Linkage Kit	Actuator	Factory-assembled valve sizes 2-way & 3-way	Field-assembled to VB valve bodies 2-way & 3-way
AV-611	Mx41-6043 Mx41-6083	½" to 2" 1" to 2"	½" to 2"
	Mx41-6153	1½" to 2"	





Typical Actuator Mounting

MA-52xx Hydraulic 2-Position SR Actuators


Application

These MA-52xx Series Actuators are used for two-position control of valves that require a return to the normal position upon power interruption.

Features

- · Two-position actuators controlled by SPST controller
- Spring return
- 24 Vac and 120 Vac models are available
- An actuator with the part number suffix "-500" has a built-in, adjustable, SPDT Auxiliary switch
- Die cast lower housing with ½" conduit opening and painted steel upper housing
- Hydraulic actuator with oil-immersed motor and pump

Model table									
		Actuator	power inpu	t		Timing in seconds @ 72° F (22° C)			
	40	60 Hz		50 Hz		10 amps aux switch		5	
	AC voltage +10 -15%	Watts	Amps	Watts	Amps		To extend (no I load stroke)	Retract on power loss	
MA-5210	120	400	5.4	0.44	0.0	0.47	No		
MA-5210-500		120 5.4 0.14	6.0	6.0 0.17	Ves Yes	Yes		45	
MA-5213			0.65			No	- 60	15	
MA-5213-500	24	8.8	0.65	9.8	0.80	Yes			



MA-52xx Spring Return Series

S	pe	cif	ica	tio	ns

Inputs	
Control circuit	Two-wire, SPDT
Power input	Refer to Model table
Connections	Color-coded 4 ft. (1.2 m) leads.
Outputs	
Electrical	Auxiliary switch (MA-5xxx-500 models), 10 Amps, 120 Vac adjustable SPDT, factory set to close the N.C. contact at the retracted end of stroke.
Mechanical	Stroke, Valve: Approximately 9/16" (14.3 mm) from fully retracted to fully extended
Environment	
Temperature limits	Shipping & storage, -40 to 140° F (-40 to 61° C) Operating, -20 to 140° F (-29 to 60° C) Operating, damper -20 to 140° F (-29 to 60° C) Operating, valve: refer to restrictions on maximum allowable ambient air temperature for Valve Actuators table (next page).
Humidity	5 to 95% RH, non-condensing
Location	NEMA Type 1
Dimensions	6% x 3-23/32 x 3% Dia." (171 x 94 x 83 mm)
Regulatory compliance	RoHS and REACh

MA-52xx Hydraulic 2-Position SR Actuators

Restrictions on Maximum Allowable Ambient Air Temperature for Valve Actuators

Temperature of media in the valve body	Maximum ambient temperature of MA-521x Series			
(Check the rating of the valve) °F (°C)	AV-7600-1 (Only) °F (°C)	AV-7600-1 and AV-601 °F (°C)		
366 (180)	90 (32)	90 (32)		
340 (171)	100 (38)	100 (38)		
281 (138)	115 (46)	140 (60)a		
181 (83)	140 (60)a	140 (60)a		
80 (26)	140 (60)a	140 (60)a		

a - Maximum ambient temperature of the actuator must never exceed 140° F (60° C).

Optional Accessories

AV-7600-1

Linkages AV-601 Linkage extension for hot water and steam applications; use with AV-7600.

AV-7000-1	Linkage /2 to 2 to be used with VB-7000.			
Aux. Switch Leads (-500 Actuators only)	Brown (N.O.) Orange (N.C.) Red/White (C)	MA-5XXX Actuator		

Linkago 1/4" to 2" to be used with VR 7000

	hermostat or Switch Black	
Actuator Voltage Vac	Color(s) of L2 Lead	NOTE: Actuator extends when contacts are closed and retracts
24	Black/Blue	when contacts are open
120	White	
240	White/Black	

Typical Wiring for MA-5xxx Series Actuators

Application

The AV-7600-1 Linkage kit is used to field assemble MA-521x, MP-521x, MP-541x and MP-561x round hydraulic actuators to $\frac{1}{2}$ " through 2" VB-7000 series valve bodies.

Features

- Provides direct-couple interface between MA, MP and MPR-5xxx actuators and valve bodies
- Fits all VB-7000 series valve bodies
- Includes spring choices for higher 2-Way valve close off

Specifications

 Actuator mounting: In any upright position above the center line of the valve body. For steam applications only, mount the actuator above the valve body at 45° from vertical. AV-7600-1 Hydraulic Actuator Linkage Kit





MP-52xx Hydraulic Proportional SR Actuators

Application

These MP-52xx Series actuators provide electronic proportional control of valves requiring the return to normal position upon power interruption.

Features

- Compatibility with 2 to 15 VDC System 8000 Input signals
- Proportional control by variable VDC Input signal
- Spring return
- Fixed 3 VDC operating span
- Non-adjustable start point and non-positive positioning. Typically, one actuator is controlled from one VDC output signal
- $10,000 \Omega$ or greater input impedance
- 24 and 120 Vac models
- Die cast lower housing with ½" (12.7 mm) conduit opening and painted steel upper housing
- · Hydraulic actuator with oil-immersed motor, transducer, and pump

Model Table

Actuator			ator power i				Timing in seconds @ 72° F (22° C)					
Part number AC voltage ± 10%	60 Hz		50	Hz	10 amps auxiliary			Retract	Required Linkage			
		Watts	Amps	Watts	Amps	switcha	To extend (no load stroke)	To Retract	on Power Loss	Limage		
MP-5210	120	11.7	11.7	0.16	40.0	40.0	12.9 0.19	No				
MP-5210-500	120	11.7	0.16	12.9	0.19	0.19		0.19	Yes	60	40	45
MP-5213	24	12.0	0.80	12.0	13.2 0.97	0.07	No	00	40	15	AV-601 ^b	
MP-5213-500	24	12.0	0.60	13.2		Yes						



MP-52xx Proportional

•	
Inputs	
Compatible with	2 to 15 VDC from System 8000 controllers Operating Span: Approx. 3 VDC fixed. See F-26235-2 for valves. Impedance: $10,000\Omega$ or greater.
Power input	Refer to Model table.
Connections	Color-coded 4 ft. (1.2 m) leads.
Outputs	
Electrical	Auxiliary switch (Mx-52xx-500 models), 10 Amps, 120/240 Vac adjustable SPDT, factory set to close the N.C. contact at the retracted end of stroke.
Mechanical	$Stroke, Valve: Approximately 9/16" (14.3 \ mm) \ over \ a \ nominal \ 6 \ VDC \ (fully \ retracted) \ to \ 9 \ VDC \ (fully \ extended).$
Environment	
Temperature limits	Shipping & Storage, -40 to 140° F (-40 to 61° C) For valve actuators: Refer to the valve size and selection chart on page 70
Humidity	5 to 95% RH, non-condensing
Location	NEMA Type 1
Dimensions	6% x 3% Dia." (171 x 83 mm)
Regulatory compliance	RoHS and REACh

a - Common of switch is in series with AC power supply to the motor. Therefore, the switch must be wired to control the same voltage as the actuator itself.

b - May be required for steam or hot water.

MP-52xx Hydraulic Proportional SR Actuators

Restrictions on the Maximum ambient temperature for valve actuator

	Maximum ambient tempe MPR-5		Maximum ambient temperature of MA-521x or MP-521x		
Maximum ambient temperature(Check valve ratings)	AV-600a or AV-7600b only for chilled water applications only	AV-600a or AV-7600b & AV-601	AV-600a or AV-7600b Only	AV-600a or AV-7600b & AV-601	
366°F (180°C)		88°F (31°C)	90°F (32°C)	90°F (32°C)	
340°F (171°C)	Do not use	93°F (34°C)	100°F (38°C)	100°F (38°C)	
281°F (138°C)		103°F (39°C)	115°F (46°C)		
181°F (83°C)		120°F (48°C)	44005 (0000)	140°F (60°C)c	
80°F (26°C)	140°F (60°C)c	140°F (60°C)c	140°F (60°C)c		

a - For detailed Linkage Installation instructions, refer to AV-600 Hydraulic Actuator Linkage Kit installation instructions, F-26279. b - For detailed Linkage Installation instructions, refer to AV-7600 Hydraulic Actuator Linkage Kit installation instructions, F-26235.

Optional accessories

	Linkages
AV-601	Linkage extension for hot water and steam applications; use with AV-7600.
AV-7600-1	Linkage for VB-7000.

Application

The AV-7600-1 Linkage kit is used to field assemble MA-521x, MP-521x, MP-541x and MP-561x round hydraulic actuators to 1/2" through 2" VB-7000 series valve bodies.

- Provides direct-couple interface between MA, MP and MPR-5xxx actuators and valve bodies
- Fits all VB-7000 series valve bodies
- Includes spring choices for higher 2-Way valve close off

Specifications

Actuator mounting: In any upright position above the center line of the valve body. For steam applications only, mount the actuator above the valve body at 45° from vertical.

AV-7600-1 Hydraulic Actuator Linkage Kit



c - Maximum allowable ambient temperature of the actuator.

MP-541x Hydraulic Proportional SR Actuators

Application

These MP-54xx Series actuators provide electronic proportional control of valves requiring the return to normal position upon power interruption.

Features

- Proportional control by variable VDC input signal
- Compatibility with 2 to 15 VDC System 8000 input signals
- Spring return
- Fixed 3 VDC operating span
- Adjustable 2 to 12 VDC start point for paralleling or sequencing of actuators
- $10,000 \Omega$ or greater input impedance
- 24 and 120 Vac models
- Damper models with linkage or base models that require separate damper or Linkage
- Die cast lower housing with ½" conduit opening and painted steel upper housing
- Hydraulic actuator with oil immersed motor, transducer, and pump

Model Table

Part number	Actuator power input						Timing in seconds @ 72° F (22° C)				
	number AC voltage +10%	60 Hz		50	50 Hz Positive positioner		No Load Stroke		Data-at an	Linkage	
		Watts	Amps	Watts	Amps		To Extend	To Retract	Retract on power loss		
MP-5410	120	11.7	0.16	12.9	0.19	Yes		00	40	45	AV-600
MP-5413	24	12.0	0.80	13.2	0.97		60	40	15	AV-601b AV-7600-1	



MP-541x Series Positive Positioning

Specifications	
Inputs	Compatible with 2 to 15 VDC from System 8000 controllers
Operating span	Approx. 3 VDC fixed.
Start point	Adjustable 2 to 12 VDC. Factory set at 6 VDC. Impedance: 10,000 Ω or greater.
Connections	Color-coded 4 ft. (1.2 m) leads.
Outputs	
Electrical	Internal Power Supply: 20 VDC, 25 mA.
Mechanical	Stroke, Valve: Approximately 9/16" (14.3 mm) over a nominal 6 VDC (fully retracted) to 9 VDC (fully extended) input range.
Environment	
Ambient temperature limits	Operating: -20 to 140° F (-29 to 60° C) For valve actuators: Refer to the valve size and selection chart on page 70.
Humidity	5 to 95% RH, non-condensing
Location	NEMA Type 1
Dimensions	6% x 3½ Dia." (171 x 83 mm)
Regulatory compliance	RoHS and REACh

a - Internal feedback circuitry provides positive positioning of valve stem in relation to Control signal.

b - May be required for steam or hot water.

MP-541x Hydraulic Proportional SR Actuators

Restrictions on the maximum ambient temperature for Valve Actuator

Maximum ambient	Maximum ambie MP-541x o	nt temperature of r MPR-5x1x	Maximum ambient temperature of MA-521x or MP-521x		
temperature(Check Valve Ratings)	AV-600a or AV-7600b Only for Chilled Water Applications Only	AV-600a or AV-7600b & AV-601	AV-600a or AV-7600b Only	AV-600a or AV-7600b & AV-601	
66°F (180°C)		88°F (31°C)	90°F (32°C)		
340°F (171°C)		93°F (34°C)	100°F (38°C)		
281°F (138°C)	Do not use	103°F (39°C)	115°F (46°C) 140°F (60°C		
181°F (83°C)		120°F (48°C)	140°F (60°C)°		
B0°F (26°C)	140°F (60°C)°				

 $a-For\ detailed\ Linkage\ Installation\ instructions,\ refer\ to\ AV-600\ Hydraulic\ Actuator\ Linkage\ Kit\ installation\ instructions,\ F-26279.$

Optional accessories

	Linkages
AV-601	Linkage extension for hot water and steam applications; use with AV-7600.
AV-7600-1	Linkage for VB-7000.

Application

The AV-7600-1 Linkage kit is used to field assemble MA-521x, MP-521x, MP-541x and MP-561x round hydraulic actuators to ½" through 2" VB-7000 series valve bodies.

Features

- Provides direct-couple interface between MA, MP and MPR-5xxx actuators and valve bodies
- Fits all VB-7000 series valve bodies
- Includes spring choices for higher 2-Way valve close off

Specifications

 Actuator mounting: In any upright position above the center line of the valve body. For steam applications only, mount the actuator above the valve body at 45° from vertical. AV-7600-1 Hydraulic Actuator Linkage Kit





b - For detailed Linkage Installation instructions, refer to AV-7600 Hydraulic Actuator Linkage Kit installation instructions, F-26235.

c - Maximum allowable ambient temperature of the actuator.

MPR-561x Hydraulic Proportional SR Actuators

Application

These MPR-561x Series actuators provide electronic proportional control of valves requiring return to normal position upon power interruption. They are compatible with controllers generating 4 to 20 mA input signals.

Features


- Spring return
- 24 and 120 Vac models available
- Die cast lower housing with ½" conduit opening and painted steel upper housing
- Hydraulic actuator with oil-immersed motor, transducer, and pump
- Proportional actuators controlled by a variable mAdc Input signal.
- 82.5 Ω input impedance
- Adjustable actuator startpoint

Model table

Part number		Actua	tor power in	put			Timing in seconds		
	AC voltage	60 Hz				Input signal	@ 72° F No load		Linkage
	±10%	Watts	Amps	Watts	Amps		Extend	Retract	
MPR-5610	120	11.7	0.16	12.9	0.19	4 to 20 mA	00	30	AV-600 AV-601ª
MPR-5613	24	12.0	0.80	13.2	0.97		60		

a - May be required for steam or hot water.

Inputs	
Control circuit	MPR-561x Series: Two-wire.
Input impedance	82.5 Ω for 4 to 20 mA input.
Power input	Refer to Model table
Connections	Color-coded 4 ft. (1.2 m) leads.
Outputs	
Electrical	Position signals: Internal feedback circuitry provides positive positioning of the valve in relation to the controller signal. Startpoint adjustment: Adjustable potentiometer provides manual adjustment of the actuator startpoint.
Mechanical	Stroke, valve: Approximately 9/16" (14.3 mm) from fully retracted to fully extended. Proportional output torque rating of 15 lb-in (1.7 N-m), available throughout the entire stroke, based on the lowest force available under normal operation, the spring return stroke, or at a minimum (-10%) supply voltage.
Environment	
Temperature limits	Shipping and storage: -40 to 140° F (-40 to 60° C) Operating: -20 to 140° F (-29 to 60° C) Operating, valve: Refer to the valve size and selection chart on page 70
Humidity	5 to 95% RH, non-condensing
Location	NEMA Type 1
Dimensions	MP-5x1x: 6¾ x 3¼" (171 x 83 mm)
Regulatory compliance	RoHS and REACh



MPR-561x Series Proportional



MPR-561x Hydraulic Proportional SR Actuators

Optional Accessories Linkages AV-601 Linkage extension for hot water and steam applications; use with AV-7600. AV-7600-1 Linkage for VB-7000.



Application

The AM-708 500 ohm resistor converts a 4 to 20 mA signal to a 2 to 10 VDC signal.

Specifications

- Actuators: MS40-7043, MS41-7073, MS41-7153, MS40-717x, MS41-6083, MS41-6153 and MS41-6343.
- Wire leads.

Application

The AV-7600-1 Linkage kit is used to field assemble MA-521x, MP-521x, MP-541x and MP-561x round hydraulic actuators to $\frac{1}{2}$ " through 2" VB-7000 series valve bodies.

Features

- Provides direct-couple interface between MA, MP and MPR-5xxx actuators and valve bodies
- Fits all VB-7000 series valve bodies
- Includes spring choices for higher 2-Way valve close off

Specifications

 Actuator mounting: In any upright position above the center line of the valve body. For steam applications only, mount the actuator above the valve body at 45° from vertical.



AV-7600-1 Hydraulic Actuator Linkage Kit





AV-601 Extension for MA, MP 5x1x-xxx, MPR-5x1x, MP-541x

Application

The AV-601 linkage extension kit is used to increase the allowable ambient temperature range of MA, MP-5x1x-xxx, MPR-5x1x and MP-541x Series actuators. The MP-541x and MPR-5x1x Series of actuators require the AV-601 extension. This kit provides thermal insulation between the valve and the actuator. It does not insulate the actuator from radiant or convective heat transfer.

Specifications

181°F (83°C)

80°F (26°C)


- Kit consists of an extension coupling and a spacer.
- Dimensions: Add 2-1/32" (52 mm) to the "E" dimension for the valve assembly using an AV-601 linkage extension. Refer to complete dimensions in the separately available Wiring, Dimensions and Reference document F-28125 from the mySchneider download center.
- 2-Way Valves, Union End
- 2-Way Valves, Threaded
- 3-Way and Sequencing Valves, Flared
- 3-Way and Diverting Valves, Threaded

Restrictions on the maximum ambient temperature for Valve Actuator

	Maximum ambient temperat or MPR-5x1x	Maximum ambient temperature of MA-521x or MP-521x		
Maximum ambient temperature (check valve ratings)	AV-600a or AV-7600b only for chilled water applications only	AV-600a or AV-7600b & AV-601	AV-600a or AV- 7600b Only	AV-600a or AV-7600b & AV-601
366°F (180°C)		88°F (31°C)	90°F (32°C)	
340°F (171°C)	Deneture	93°F (34°C)	10	00°F (38°C)
281°F (138°C)	F (138°C)		115°F (46°C)	140°F (60°C)°

120°F (48°C)

140°F (60°C)c



AV-601 Linkage Extension for Electric/Electronic Hydraulic Valve Actuators

a - For detailed Linkage Installation instructions, refer to AV-600 Hydraulic Actuator Linkage Kit installation instructions, F-26279.

b - For detailed Linkage Installation instructions, refer to AV-7600 Hydraulic Actuator Linkage Kit installation instructions, F-26235. c - Maximum allowable ambient temperature of the actuator.

MK-2690 Pneumatic Valve Actuator - Proportional

Application

The MK-2690 provides proportional pneumatic control of $\frac{1}{2}$ " to 2" VB-7000 Series valves (subject to close-off ratings) and discontinued $\frac{1}{2}$ " to 1 $\frac{1}{2}$ " VB-9xxx valves.

Features

- Compact size with 6 in² (39 cm²) effective area
- Rugged die cast aluminum housing
- Replaceable beaded, molded, neoprene diaphragm

Model table					
lodel number	Nominal spring range ^a (spring color Code)				
viodel number	psig	kPa			
	3 to 7 (Yellow)	21 to 48			
MK-2690	5 to 10 (Black)	34 to 69			
	8 to 13 (Blue)	55 to 90			





MK-2690 Proportional Pneumatic Valve Actuator

Specifications	
Inputs	Compatible with proportional pneumatic signal. Refer to Model table.
Start point	Non-adjustable.
Air connections	1/8" FNPT located on side of housing.
Max. air pressure	30 psig (207 kPa)
Mechanical outputs	
Stroke	5/8" available
Environment	
Ambient temperature limits	Shipping: -40 to 220° F (-40 to 104° C) Operating: -20 to 220° F (-29 to 104° C)
Humidity	5 to 95% RH, non-condensing
Spring	(see Optional accessories below)
Dimensions	3-9/16" H x 5" W x 21/4" D (90 x 127 x 57 mm)
Optional accessories	
Spring	Stainless steel spring retracts actuator shaft and raises valve stem on loss of air pressure. Springs provided in AV-400 or AV-7400 linkage.
Linkages	
AK-42309-500	Positive Positioner & linkage; use with MK-2690-0-0 to 1 or MK-2690-0-0-2 models only.
AV-400	Linkage (includes parts for VB-7000 and VB-9xxx valves and 3 to 7, 5 to 10, & 8 to 13 springs)
AV-7400	Linkage for VB-7000 valves only. (includes 3 to 7, 5 to 10, & 8 to 13 springs.)
FOOLS factory available)	
TOOL-095-1	Pneumatic calibration tool kit.
Maintenance parts	
PNV-144-43	3 to 7 psig spring
PNV-145-45	5 to 10 psig spring
PNV-145-48	8 to 13 psig spring
PNV-102-1	Diaphragm

Globe Valves and Actuators

AV-7400 Pneumatic Actuator Linkage Kit

Application

The AV-7400 Linkage Kit is used to field install MK-2690 pneumatic actuators to a variety of $\frac{1}{2}$ " to 2" VB-7000 series valve bodies.

Features

- Springs are provided for control-signal applications, including 3 to 7, 5 to 10 and 8 to 12 psig.
- Kit fits all VB-7000 series valve bodies.
- Blue spring used with AV-7600-1 supports hydraulic 4 to 20 mA and 0 to 10 VDC applications.

Specifications

· Actuator mounting: In any upright position with actuator above the center line of the valve body.

g specifications				
Spring range psig (kPa)	Spring color			
3 to 7 (21 to 48)	Yellow			
5 to 10 (34 to 68)	Black			
8 to 13 (55 to 89)	Blue			



Pneumatic Actuator Linkage Kit

MK-46xx Pneumatic Actuator - Proportional

Application

The MK-46xx Series and MK-4621-422 proportional pneumatic actuators, with 11 sq. in. (71 cm2) effective diaphragm area, are used to control ½" to 2" VB-7000 series valves.

Features

- Rugged die cast aluminum construction
- Rolling diaphragm
- Multiple spring ranges for various applications
- Adjustable start point (refer to Specifications)
- 1/2" Nominal stroke
- Can also be used on ½" stroke discontinued VB-9xxx series valves (½" to 1¼").

Model number	Nominal spring range ^a				
Woder Humber	psig	kPa			
MK-4601	3 to 6	21 to 41			
MK-4611	5 to 10	34 to 69			
MK-4621	10 to 13	69 to 90			
MK-4621-422	10 to 11.25	69 to 77			
MK-4641	3 to 13	21 to 90			



a - Nominal (no load) condition, spring ranges based on $\frac{1}{2}$ " (13 mm) maximum stroke.

Specifications	
Construction	Compatible with proportional pneumatic signal. Refer to Model table.
Housing	Die cast aluminum.
Diaphragm	Replaceable, beaded, molded, neoprene (Part number PNV-002).
Stroke	½" (12.7 mm) nominal.
Spring	Retracts actuator shaft and raises valve stem on loss of air pressure.
Nominal spring range	Refer to Model table.
Starting point	Field adjustable.
MK-4601, MK-4621	+½ psig (7 to 14 kPa).
MK-4611, MK-4641	±2 psig (14 kPa).
Air connections	1/8" FNPT.
Max. air pressure	30 psig (207 kPa).
Environment	
Ambient temperature limits	Shipping: -40 to 220° F (-40 to 104° C) Operating: -20 to 220° F (-29 to 104° C)
Mounting	In any upright position with actuator head above the center line of the valve body.
Dimensions	3-7/8 x 4¾ x 4¾" (99 x 121 x 121 mm)
Maintenance parts	See F-26033
Optional accessories	
Linkage	AV-401. See F-19072
Positive Positioner & linkage	e; AK-42309-500 use with MK-46x1-0-2.
Tools (factory available)	TOOL-095-1 Pneumatic calibration tool kit.

MK-66xx Pneumatic Actuator - Proportional

Application

MK-66xx proportional pneumatic actuators, with 50 sq. in. (323 cm2) effective diaphragm area, are used to control 1½" to 2" VB-7000 series valves.

Features

- Rugged die cast aluminum construction
- Rolling diaphragm
- Three spring ranges for various applications
- Start point adjustable ±2 psi

odel table			
	Nominal s	Nominal stroke	
Model number	psig	kPa	in. (mm)
MK-6601	3 to 8	21 to 55	
MK-6611	5 to 10	34 to 69	½ (13.7)
MK-6621	8 to 13	55 to 90	



Proportional Pneumatic Valve Actuator

Specifications	
Construction	
Housing	Die cast aluminum
Diaphragm	Replaceable beaded molded neoprene (Part number PNV-202)
Stroke	Refer to Model table.
Spring	Retracts actuator shaft and raises valve stem on loss of air pressure
Nominal spring range	Refer to Model table.
Starting point	Adjustable ±2 psig (±14 kPa)
Maximum air pressure	30 psig (207 kPa)
Ambient temperature limits	
Shipping	-40 to 220°F (-40 to 104°C)
Operating	-20 to 220°F (-29 to 104°C)
Air connections	1/8" FNPT
Mounting	Any upright position with actuator head above center line of the valve body
Dimensions	7%" H x 10½ "W x 10½" D (199 x 267 x 267 mm)
Maintenance parts	See F-26033
Optional accessories	
Linkage	AV-430 (See F-19072).

AK-42309-500 Positive Positioning Relay

Application

Positive Positioner Pneumatic Relay is used to accurately position an actuator stroke with respect to signal pressure from the controller. It can also be used to change the effective spring range of an actuator and increase the capacity of a controller.

Features

For accurate positioning of valve and Damper Actuators, this positioner utilizes a pilot-operated, relay-type position-sensing mechanism, much more sensitive to actuator position changes than some competitive "force-balance" positioners.

Model Number	Description
AK-42309-500	Positive Positioning Relay with Mounting Linkage.

Note: This model cannot be used with M556, M572, M573, M574 Series actuators. Use N800-0555 positioner with M556, M573, and M574.

Specifications	
Action	Direct (increase in output pressure to actuator with an increase in pilot pressure from controller)
Pilot input	0 to main air pressure, psig.
Output	0 to main air pressure, psiq.
Construction	
lousing	Polysulfone
Diaphragm	Neoprene
Start point	Adjustable 1 to 12 psig (7 to 83 kPa)
Span	Adjustable 2 to 13 psi (14 to 90 kPa); factory set at 5 psig.
Stroke	Adjustable 2 to 13 psi (14 to 90 kPa); factory set at 5 psig with feedback spring for 7/16 to 5" stroke.
Supply air pressure	Clean, oil free, dry air required (refer to EN-123).
Maximum	30 psig (207 kPa).
lominal supply	15 to 20 psig (103 to 138 kPa)
Environment	
Ambient temperature limits	Shipping: -40 to 160°F (-40 to 71°C). Operating: 32 to 140°F (0 to 60°C).
Humidity	5 to 95% R.H., non-condensing.
ocations.	NEMA Type 1 (IP10).
Air connection code	Refer to Figure 1
Air connections	
M" and "B"	Barbed for 1/4* O.D. plastic tubing
P"	Dual-contoured for 1/4" O.D. and 5/32" O.D. tubing
Air consumption for sizing air compressor	19 scim (5.2 mL/s) at 20 psig (138 kPa) supply
Air capacity for sizing air mains	20 scim (5.5 mL/s).
low capacity	860 scim (235 mL/s) at 20 psig (138 kPa) supply
Mounting linkage	All necessary linkage provided to assemble AK-42309-500 to MK-2690 actuator and the following actuator series; MK-3000, MK-4400, MK-4600, MK-4700, MK-4800, MK-6600, MK-6800, MK-6900, MK-7100, MK-8800 and MK-8900.
Dimensions	2½ H x 4½ W x 3 D" (64 x 114 x 76 mm).
Regulatory compliance	RoHS and REACh



AK-42309-500 Positive Positioning Relay




Figure 1 Piping Connections.

More information: Scan the QR code or visit the link below for more information.



Visit

http://goo.gl/LJCLEb



Globe Valves and Actuators

Ordering VB-8/9000 Valves

Specify two part number fields (2 and 6 below) to determine the valve part number.

1) Control Signal 2) Trim and Valve Configuration 3) Pipe End Connections 4) Actuator or Linkage 5) Pattern 6) Port Code Cv Value VB - 3 - 0 - 5 -

Specify Option 3


(Flanged) for all valves.

Refer to the guide below.

Specify Option 5 (Flanged) for all valves.

For water, steam, glycol and similar non flammable, non toxic fluids, choose based on the Capacity Sizing section of this catalog. Below 2½", go to the valve size and selection chart on page 70.

Ordering VB-8000, VB-9000 Valves

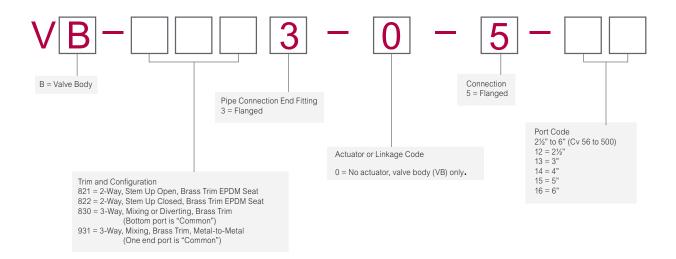

NOTE: Threaded bodies are not available in size 21/2" and larger.


VB-8000 21/2" to 6" 2 and 3-Way Valves

		3 Valve Bodies					
Ports		2-Way F	2-Way Flanged 3-				
Application		Chilled or hot	Chilled or hot water, steam ⁱ Chille				
Size			2½" to 6	"			
Valve body p	art number	VB-8213-0-5-P	VB-8223-0-5-P	VB-8303-0-5-P			
Valve body a	ction	2-way stem open	2-way stem up closed	3-way/diverting ^a			
	Flow type	Equa	Modifier linear				
Material	Body		n				
	Seat	Forged brass					
	Stem	Stainless steel					
	Plug	Forged brass					
	Packing		ded M				
	Seat ring	EPD	None				
ANSI pressui	re class, psig	125 (up to 200 psig below 150°F)					
Maximum inle steam psig (k	•	35 psig (241 kPa) -					
Allowable control media temperature °F (°C) ^b		20°F to 281°F (-7°C to 138°C)					
Close-off pre	ssure, psi (kPa)	125 psi (8	35 psi (241 kPa)°				


Close-off pre	essure, psi (kPa)	125 psi (8	56 kPa) °	35 psi (241 kPa) °				
P code	Valve size, In.	Cv (F	(vs)	Cv (kvs)mixing ^d	Cv (kvs) diverting ^e			
12	21/2	EC (40)	EC (40)	90 (60)	95 (82) ^f			
12	2/2	56 (48)	56 (48)	80 (69)	115 (99) ^g			
13	3	85 (74)	85 (74)	110 (95)	120 (104) h			
14	4	145 (125) 145 (125)		190 (164)	190 (164) h			
15	5	240 (208)	240 (208)	290 (251)	290 (251) h			
16	6	370 (320)	370 (320)	500 (433)	500 (433) h			


- a VB-8303 valves may be used as mixing or diverting valves. VB-8303 valves will also operate sufficiently as
- 2-Way angle valves if either end (side) port is closed off.
- b Freeze protection required for temperatures below 32°F (0 °C). Avoid ice formation on stems.
- $c\ -Valve\ port\ in\ closed\ position.\ See\ Specifications\ in\ following\ pages\ for\ maximum\ allowable\ VB-8xxx\ differential\ pressure\ for\ valve\ in\ any\ open\ position.$
- \mbox{d} Mixing configuration, ports A and B are inlets, port AB is outlet (located on bottom).
- e Diverting configuration, port AB is inlet, ports A and B are outlets. Port AB located on bottom.
- $\ensuremath{\text{f}}$ Diverting configuration, flow AB to A ports.
- $\ensuremath{\mathtt{g}}$ Diverting configuration, flow AB to B ports.
- h All Diverting flow configurations, flow AB to either A or B ports.
- i Glycol up to 50%


VB-8000 3-Way Flow Patterns



- 2-Way and 3-Way Valves
- 2-Way Stem Up Open or Stem Up Closed
- 3-Way/Diverting
- ASA 125 Flanged Cast Iron Body







VB-9313 21/2" to 6" 3-Way Valves


Application

VB-9313 Series 3-Way Valves control hot or chilled water in heating or air conditioning systems. These valves must be piped with two inlets ("A" and "B" ports) and one outlet ("AB" port). They are used for two-position or proportional control applications. Valve assemblies require an actuator and a linkage that may be factory or field assembled.

Features

- Valve sizes 2½" to 6"
- 125 psig pressure rating per ANSI Standards (B16.1–1993) for flanged cast iron bodies
- Spring-loaded TFE & EPDM packing

Specifications		Valve Body Series VB-9313-0-5-P				
Application				Chilled or hot water °		
Flow characteristics	i	Mixing				
Sizes		2½" to 6"				
Type of end fitting		125 lb. Flanged				
	Body	Cast Iron				
	Seat		Bronze			
Valve materials	Stem		Stainless steel			
	Plug		Brass			
	Packing			Spring loaded TFE & EPDM		
	Disc		None			
ANSI pressure class	s, psig			125 (up to 200 psig below 150°F		
Allowable control m	edia temperatu	re, °F (°C)		40°F to 300°F (4°C to 149°C)		
Allowable differentia	al pressure, wa	ter, psi (kPa)	a	35 psi (241 kPa) max. for norma life		
Valve size, In.	Cv⁵Rating	kvs ^b Rating	Stroke	Complete valve body part number		
21/2	74	64	7/8" (22 mm)	VB-9313-0-5-12		
3	90	78	7/8" (22 mm)	VB-9313-0-5-13		
4 170 147			7/8" (22 mm)	VB-9313-0-5-14		
5	290	251	1¾" (45 mm)	VB-9313-0-5-15		
6	390	VB-9313-0-5-16				




 $\label{thm:commended} \textbf{Exceeding maximum recommended differential pressure voids the product warranty.}$

b - kvs= m3/h (ΔP = 100 kPa) kvs = Cv / 1.156 Cv = gpm / $\sqrt{\Delta}P$ (in psi).

c - Glycol up to 50%

VB-93xx 3-Way Flow Pattern





VB-9313-0-5-P (Typical)

3-Way Valve Sizing for Water

Sizing for water

Two-position

Two-position control valves are normally selected by "line size" to keep pressure drop at a minimum. If it is desirable to reduce the valve below line size, then 10% of available pressure (that is, the pump pressure differential available between supply and return mains with design flow at the valve location) is normally used to select the valve.

Proportional and floating

Proportional and floating control valves are usually selected to take a pressure drop equal to at least 50% of the available pressure. As available pressure is often difficult to calculate, the normal procedure is to select the valve using a pressure drop at least equal to the drop in the coil or other load being controlled (except where small booster pumps are used) with a minimum recommended pressure drop of 5 psi (34 kPa). When the design temperature drop is less than 60°F (33°C) for conventional heating systems, higher pressure drops across the valve are needed for good results.

Conventional heating system pressure drops

Design temperature load drop °F (°C)	Recommended pressure drop (% of available pressure)	Multiplier on load drop				
60 (33) or more	50%	1x load drop				
40 (22)	66%	2x load drop				
20 (11)	75%	3x load drop				

Reducer affects

On full flow bodies, offset the affects of directly connected reducer(s) by choosing flow coefficients 6% or more higher.

Cv (flow coefficient) determination

The valves' water capacity is based on the following formula:

$$Cv = \frac{GPM}{\sqrt{\Delta P}} \text{ or } Cv = GPM \sqrt{\frac{Specific Gravity}{\Delta P}}$$

Cv = Coefficient of flow

Cv is defined as the flow in GPM with $\Delta P = 1$ psi with the valve completely

GPM = U.S. gallons per minute (60°F, 15.6°C)

 ΔP = Differential pressure in psi (pressure drop)

Proportional 3-Way valves

Recommended pressure drop.

Bypass application

50% of available pressure, or equal to pressure drop through the load at full flow.

3-Way valves in the return used to control output by throttling water flow to the load (bypass applications) are controlling output in the same manner as throttling 2-Way valves, and must be selected using the same high pressure drops if good control results are to be obtained.

Constant flow applications

20% of available pressure, or equal to 1/4 of the pressure drop through the load at full flow. 3-way valves used with individual pumps to control output by varying water temperature to the load (constant flow applications) are controlling output by mixing two water sources at different temperatures and do not require high pressure drops for good control results.

Water capacity graph instructions

To select the appropriate valve Cv from the

- 1. Select the required flow from the "Flow in GPM"
- 2. Select available pressure drop from the "Pressure Drop in psi" axis.
- 3. Select the appropriate line and follow to the Capacity Cv (Kv) listing and choose the closest valve Cv flow coefficient.
- 4. Confirm the selection by calculation from the water equations.

Additional Water Valve Sizing Information

For more information, download these documents from our website.

- CA-27 3-Way Valves Application Information
- Valve Selection Table Water, F-11080




VB-8xx3 Valve Body Characteristics

System design considerations

Note: The information in this section describes characteristics of the VB-8xx3 valve bodies, which are used in the Vx-8xx3 valve assemblies. Control precision

2-Way valves:


The flow curve shown below is representative of all sizes. All valve plugs have lower gain when nearly closed to enhance control at low demand. 2-way valves are nominally equal percentage and normally used for water and low pressure steam.



Typical modified equal percentage flow characteristics


Temperature/pressure ratings

Temperature and pressure ratings of 2-way and 3-way valves are shown below. Ratings conform with published values and disclaimer.



3-Way valves:

3-way valves are designed so that the flow from either of the inlet ports to the outlet is nominally linear, which means the total flow from the outlet is almost constant over the stroke of the valve stem. The flow is limited at the initial opening similar to an equal percentage curve to enhance system stability. Typical flow characteristics of the VB-8303 series valve bodies are shown below.



Typical flow characteristics

Rangeability

Rangeability is the ratio of rated flow to the minimum controllable flow through a valve. The nominal rangeability of the VB-8xx3 Series is greater than 100:1.

VB-8xx3-0-5-P (Cast Iron Body with Flanged End Fittings)

Standards: Pressure to ANSI B16.1, Class 125, with 200 psi (1379 kPa) up to 150 °F (65 °C), decreasing to 169 psi (1165 kPa) at 281°F (138 °C)

Materials: Valve body: Cast iron, ASTM A126 Class B

Trim: Stainless steel stem, forged brass plug, metal-to-metal or EPDM seat ring with TFE/EPDM packing parts and silicone packing grease. Close-off ratings

Nominal actuator close-off ratings are based on ANSI IV (0.01% leakage) for valves with EPDM seat rings such as VB-8213 and VB-8223. Metal-to-metal trim valves such as VB-8303 are designed for ANSI III (0.1% leakage).



VB-82x3 Water Flow Coefficient and Capacity

Water flow coefficient (Cv)

Sizing a valve requires selecting a flow coefficient (Cv), which is defined as the flow rate in gallons per minute (gpm) of 60° F water that will pass through the fully open valve with a 1 psi pressure drop (Δ P). It is calculated according to the formulas shown in Cv Equation for Water and Cv Equation for Steam. Since the flow rate through the heat exchanger is usually specified, the only variable normally available in sizing a valve is the pressure drop. The following information can be used to determine what pressure drop to use in calculating a valve Cv. Using the calculated Cv, consult the water capacity table on this page or steam capacity to select the valve body with the nearest available Cv. Caution: Be sure that the anticipated pressure drop across the valve will not exceed the close-off pressure rating and the maximum pressure differential rating listed in the Vx-8xxx Selection Guide, F-27199.

Two-position

Two-position control valves are normally selected by "line size" to keep pressure drop at a minimum. If it is desirable to reduce the valve below line size, then 10% of available pressure (that is, the pump pressure differential available between supply and return mains with design flow at the valve location) is normally used to select the valve.

Proportional

Proportional control valves are usually selected to take a pressure drop equal to at least 50% of the available pressure. As available pressure is often difficult to calculate, the normal procedure is to select the valve using a pressure drop at least equal to the drop in the coil or other load being controlled (except where small booster pumps are used) with a minimum recommended pressure drop of 5 psi (34 kPa). When the design temperature drop is less than 60°F (33°C) for conventional heating systems, higher pressure drops across the valve are needed for good results (see the conventional heating system table below).

Conventional heating system pressure drops

Design temperature load drop °F (°C)	Recommended pressure drop (% of available pressure)	Multiplier on load drop		
60 (33) or More	50%	1 x load drop		
40 (22)	66%	2 x load drop		
20 (11)	75%	3 x load drop		

Secondary circuits with small booster pumps: 50% of available pressure difference (equal to the drop through load, or 50% of booster pump head).

Water Table

Water capacity in gallons per minute for VB-82x3 Series

Valve body Cv part number Rating	Cv Differential pressure (DP in psi)															
	1	2	3	4	5	6	7	8	9	10	15	20	25	30	35	
VB-82x3-0-5-12	56	56	79	97	112	125	137	148	158	168	177	217	250	280	307	331
VB-82x3-0-5-13	85	85	120	147	170	190	208	225	240	255	269	329	380	425	466	503
VB-82x3-0-5-14	145	145	205	251	290	324	355	384	410	435	459	562	648	725	794	858
VB-82x3-0-5-15	240	240	339	416	480	537	588	635	679	720	759	930	1073	1200	1315	1420
VB-82x3-0-5-16	370	370	523	641	740	827	906	979	1047	1110	1170	1433	1655	1850	2027	2189

Cv equation for water

Where: $Cv = \frac{GPM}{\sqrt{\Delta P}}$ $\Delta P = \left(\frac{GPM}{Cv}\right)^2$ $GPM = Cv\sqrt{R}$

gpm = Flow rate of water that will pass through fully open valve, measured in U.S. gallons per minute (60 $^{\circ}$ F (15.6 $^{\circ}$ C) water)

DP = Differential pressure (pressure drop), measured in psi



VB-82x3 Steam Capacity and Vapor Pressures

Steam

Two-position

Two-position zone valves and direct radiation valves are normally sized using a minimum of 10% of inlet pressure (psig).

Proportional

Proportional control valves are normally sized as follows:

For low pressure (15 psig or less), use ΔP of 80% of gauge inlet pressure.

For steam pressures greater than 15 psig, use ΔP of 42% of absolute (gauge plus 14.7) inlet pressure. When the Cv required is between two valve sizes, select the larger size. Do not size steam valves using a pressure drop greater than 42% of the absolute inlet pressure.

Steam Table

Steam capacity in pounds per hour for VB-82x3 Series

							Differential pressure (DP in psi) ^a										
Valve body part number	Cv rating					10 psig inlet		15 psig inlet		20 psig inlet		25 psig inlet		30 psig inlet		35 psig inlet	
		0.2	1.6	0.5	4	1	8	1.5	12	2	14	2.5	16	3	18	3.5	20
VB-82x3-0-5-12	56	305	826	520	1331	818	1942	1093	2448	1359	2860	1620	3271	1879	3683	2136	4094
VB-82x3-0-5-13	85	463	1253	790	2021	1241	2947	1658	3716	2062	4341	2459	4965	2852	5590	3242	6214
VB-82x3-0-5-14	145	790	2138	1348	3447	2118	5027	2829	6339	3518	7405	4195	8470	4865	9536	5531	10601
VB-82x3-0-5-15	240	1308	3539	2231	5706	3505	8322	4683	10493	5823	12257	6943	14021	8053	15784	9156	17548
VB-82x3-0-5-16	370	2016	5456	3439	8796	5404	12830	7219	16177	8977	18896	10704	21615	12415	24334	14115	27053

a - Left column shows # per hour with a 10 % pressure drop and right column shows # per hour with an 80% pressure drop.

Cv equation for steam

$$Cv = \frac{Q \times K}{3\sqrt{\Delta P \times P2}} \qquad Q = \frac{3Cv\sqrt{\Delta P \times P2}}{K}$$

Where:

Cv = Coefficient of flow.

Q = Flow rate of steam that will pass through fully open valve, measured as pounds per hour of steam.

 ΔP = Differential pressure (pressure drop), measured in PSI.

P2 = Outlet pressure, measured in psia (absolute pressure). P2 = Inlet pressure + $14.7 - \Delta P$

 $K=\ 1$ + (0.0007 x °F superheat). K = 1 for saturated steam.

VB-82x3 Steam Capacity and Vapor Pressures

Cavitation limitations on valve pressure drop

A valve selected with too high a pressure drop can cause erosion of discs and/or wire drawing of the seat. In addition, cavitation can cause noise, damage to the valve trim (and possibly the body), and choke the flow through the valve.

Do not exceed the maximum differential pressure (pressure drop) for the valve selected. The following formula can be used on higher-temperature water systems, where cavitation could be a problem, to estimate the maximum allowable pressure drop across the valve: $Pm = 0.5 \ (P1 - Pv)$

Where

Pm = Maximum allowable pressure drop P1 = Absolute inlet pressure (psia) Pv = Absolute vapor pressure (psia)

Note: Add 14.7 psi to the gauge supply pressure to obtain the absolute pressure value. For example, if a valve is controlling 200°F water at an inlet pressure of 18 psig, the maximum pressure drop allowable would be:

Pm = 0.5 [(18 + 14.7) - 11.53] = 10.6 psi (Vapor pressure of 200°F water is 11.53 psi.) Therefore, if the pressure drop for this valve is less than 10.6 psi, cavitation should not be a problem. Systems where cavitation is shown to be a problem can sometimes be redesigned to provide lower inlet velocities. Valves having harder seat materials should be furnished if inlet velocities cannot be lowered. For additional valve sizing information, see the Vx-8xxx Selection Guide, F-27199.

Vapor pressure of water table


Water temp. (°F)	Vapor pressure (psia)	Water temp. (°F)	Vapor pressure (psia)	Water temp. (°F)	Vapor pressure (psia)	Water temp. (°F)	Vapor pressure (psia)
40	0.12	90	0.70	140	2.89	190	9.34
50	0.18	100	0.95	150	3.72	200	11.53
60	0.26	110	1.28	160	4.74	210	14.12
70	0.36	120	1.69	170	5.99	220	17.19
80	0.51	130	2.22	180	7.51	230	20.78



VB-9313 Valve Body Characteristics

Flow characteristics


3-way valves are designed so that the flow from either of the inlet ports to the outlet is approximately linear, which means the total flow from the outlet is almost constant over the stroke of the valve stem. Typical flow characteristics of VB-9313 series valve bodies are shown below.



Typical flow characteristics

Temperature / pressure ratings

VB-9313-0-5-P (Flanged Cast Iron Body) Standards: ANSI B16.1–1993 Materials: ASTM A126 Class B



Temperature and Pressure Ratings for VB-9313 Series Valve Bodies

Rangeability

Rangeability is the ratio of rated flow to the minimum controllable flow through a valve. For mixing valves, control begins as soon as plug displacement allows flow. Thus, 3-way valve rangeability normally exceeds 500:1, which is the reciprocal of 0.2% nominal leakage.

Water

Two-position

Two-position control valves are normally selected "line size" to keep pressure drop at a minimum. If it is desirable to reduce the valve below line size, then 10% of available pressure (that is, the pump pressure differential available between supply and return mains with design flow at the valve location) is normally used to select the valve.

Proportional to bypass flow

Proportional mixing valves used to bypass flow are piped on the outlet side of the load to throttle the water flow through the load and therefore control heat output of the load. These valves are usually selected to take a pressure drop equal to at least 50% of the available pressure. As available pressure is often difficult to calculate, the normal procedure is to select the valve using a pressure drop at least equal to the drop in the coil or other load being controlled (except where small booster pumps are used) with a minimum recommended pressure drop of 5 psi (34 kPa). When the design temperature drop is less than 60°F (33°C) for conventional heating systems, higher pressure drops across the valve are needed for good results (see conventional heating system pressure drops table below).

Conventional heating system pressure drops

Design temperature load drop °F (°C)	Recommended pressure drop* (% of available pressure)	Multiplier on load drop
60 (33) or more	50%	1 x load drop
40 (22)	66%	2 x load drop
20 (11)	75%	3 x load drop

^{*} Recommended minimum pressure drop = 5 psi (34 kPa).

Secondary circuits with small booster pumps: 13 50% of available pressure difference (equal to the drop through load, or 50% of booster pump head).



VB-9313 Water Flow Coefficient and Capacity

Proportional to blend water flows

Proportional valves used to blend two water flows control the heat output by varying the water temperature to the load at constant flow. These valves do not require high pressure drops for good control results. They can be sized for a pressure drop of 20% of the available pressure or equal to 25% of the pressure drop through the load at full flow.

Water table

Water capacity in gallons per minute for VB-9313 Series

Valve body	Cv		Differential pressure (ΔP in psi)													
part number	Rating	1	2	3	4	5	6	7	8	9	10	15	20	25	30	35
VB-9313-0-5-12	74	74	105	128	148	165	181	196	209	222	234	287	331	370	405	438
VB-9313-0-5-13	101	101	143	175	202	226	247	267	286	303	319	391	452	505	553	598
VB-9313-0-5-14	170	170	240	294	340	380	416	450	481	510	538	658	760	850	931	1006
VB-9313-0-5-15	290	290	410	502	580	648	710	767	820	870	917	1123	1297	1450	1588	1716
VB-9313-0-5-16	390	390	552	675	780	872	955	1032	1103	1170	1233	1510	1744	1950	2136	2307

Cv equation

Where:

Cv = Coefficient of flow

GPM = U.S. gallons per minute (60°F, 15.6°C)

= Differential pressure in psi (pressure drop)

 $C_V = \frac{GPM}{\sqrt{\Delta P}}$ $\Delta P = \left(\frac{GPM}{C_V}\right)^2$

Cavitation limitations on valve pressure drop

A valve selected with too high a pressure drop can cause erosion of discs and/or wire drawing of the seat. In addition, cavitation can cause noise, damage to the valve trim (and possibly the body), and choke the flow through the valve.

Do not exceed the maximum differential pressure (pressure drop) for the valve selected.

The following formula can be used on higher-temperature water systems, where cavitation could be a problem, to estimate the maximum allowable pressure drop across the valve:

Pm = 0.5 (P1 - Pv)

Where:

Pm = Maximum allowable pressure drop

P1 = Absolute inlet pressure (psia)

Pv = Absolute vapor pressure (psia) (Refer to the table below.)

Note: Add 14.7 psi to the gauge supply pressure to obtain the absolute pressure value.

For example, if a valve is controlling 200°F water at an inlet pressure of 18 psig, the maximum pressure drop allowable would be:

Pm = 0.5 [(18 + 14.7) - 11.53] = 10.6 psi (Vapor pressure of 200°F water is 11.53 psi.)

Therefore, if the pressure drop for this valve is less than 10.6 psi, cavitation should not be a problem.

Systems where cavitation is shown to be a problem can sometimes be redesigned to provide lower inlet velocities. Valves having harder seat materials should be furnished if inlet velocities cannot be lowered.

For additional valve sizing information, see the Vx-8xxx Selection Guide, F-27199.

VB-8xx3/9313 Close-Off Pressure Capability

Vapor pressure of water table

Water temp. (°F)	Vapor pressure (psia)	Water temp. (°F)	Vapor pressure (psia)	Water temp. (°F)	Vapor pressure (psia)	Water temp. (°F)	Vapor pressure (psia)
40	0.12	90	0.70	140	2.89	190	9.34
50	0.18	100	0.95	150	3.72	200	11.53
60	0.26	110	1.28	160	4.74	210	14.12
70	0.36	120	1.69	170	5.99	220	17.19
80	0.51	130	2.22	180	7.51	230	20.78

Seat leakage classes

ANSI/FCI 70-2 Maximum seat leakage leakage class Class II 0.5% of rated Cv 0.1% of Rated Cv Class III Class IV 0.01% of Rated Cv

0.0005 ml per minute per inch of orifice diameter Class V per psi differential

Close-off ratings (unless otherwise specified)

Nominal actuator close-off ratings are based on ANSI V with EPDM discs; and PTFE discs in steam applications. Metal-to-metal trim, such as brass 3-Way and high-temperature stainless, are designed for ANSI III (0.1-% leakage).

Note: Valve body and actuator size determine the close-off capabilities.



Overview VB-8/9000 Series Actuator Assemblies

Vx-8xx3 Series Balanced Globe Valve Assemblies

Schneider Electric VA, VF, VK, VK4, VS and VU-8xx3-xxx-5-P series valve assemblies are complete actuator/valve assemblies that accept Two-position, floating, and proportional electric/electronic and proportional pneumatic control signals, for control of chilled water, hot water, or low pressure steam. These valve assemblies consist of pneumatic, electric, or electronic valve actuators either directcoupled or linked to a 21/2" to 6" 2-Way or 3-Way valve body with ASA flanged end connections.

VB-8xx3 Series Valve Bodies

VB-8xx3-0-5-P Valve Bodies are also available separately to allow field mounting of a variety of Forta, Schneider Electric SmartX, or pneumatic actuators using the appropriate linkage.

Features

- Balanced plug design provides high close-offs using economical actuation
- Up to 125 psi (856 kPa) close-off on 2-Way models, 35 psi (240 kPa) on 3-Way models
- Universal 3-Way valve can be piped in either mixing or diverting configurations.
- Valve sizes 21/2" to 6", ASA 125 flanged
- A variety of Forta, Schneider Electric SmartX and pneumatic actuators are available, either as factory assemblies or for field assembly.
- ANSI IV shutoff (0.01% of Cv) on 2-way models, ANSI III (0.1% of Cv) on 3-way models
- Self-adjusting spring loaded TFE/EPDM packing
- Normally open, normally closed, and non-spring return models available
- Expanded temperature range of 20° to 281°F
- ISO 9001:2000 Certified Quality Management System
- Vx-9313 3-Way valves offer many of the same features as the VB-8xx3 vales and a conventional mixing valve flow pattern.

2-Way and 3-Way Valves


21/2" to 6" Flanged

2-Way Stem Up Open


2-Way Stem Up Closed

3-Way/Diverting


Electric/Electronic/Pneumatic Globe Valve Assemblies




VB-8213 with M1500A



Vx-82x3 with Mx4x-6343 (2½" - 5" with AV-607-1 6" with AV-609-1)



Vx-8303/Vx-9313 with Mx61-720x Direct-Mounted Actuator



VK-82xx with MK-6911

VB-8000, VB-9000 Assembly Selection Procedure

Globe Valve Assembly selection procedure

When selecting a globe valve assembly, you must determine the applicable codes for the Control signal type, valve body configuration, end connection, port size and actuator. Select a globe valve assembly part number as follows:

1. Control signal type, valve body configuration and end connection

Refer to "Ordering VB-8000, VB-9000 Valve Assemblies" on page 150 and select the appropriate codes for the part-number fields.

2. Valve size (flow coefficient)

If the required flow coefficient (Cv) has not been determined, do so as follows:

- a. Refer to Sizing and Selection to calculate the required Cv.
- b. Select the nearest available Cv value and corresponding valve body port code.

3. Actuator and linkages

Select the appropriate actuator and code, according to Assembly Ordering based on the Control signal type, required valve normal position, and voltage requirements. For detailed actuator information, refer to the applicable actuator specifications on subsequent pages.

Note: Linkages shown in Specification tables are supplied with the actuator. When shown in Optional Accessories the linkage must be ordered separately.

4. Close-off pressure


Confirm that the selected actuator and valve body combination provides sufficient close-off pressure. If no close-off pressure is shown, the valve body/actuator combination is not valid.

5. Available space

If available space is a consideration, check the appropriate dimensions in the separately available Wiring, Dimensions and Reference document F-28125 from the mySchneider download center.

Specify four part number fields

(1, 2, 4, and 6 below) to determine the Valve Actuator Assembly part number.

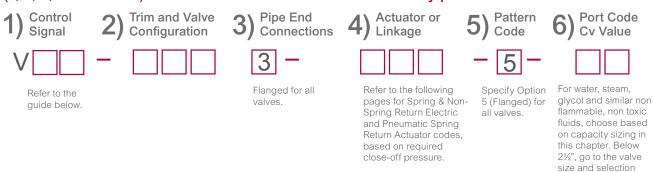

Ordering VB-8000, VB-9000 Valve Assemblies

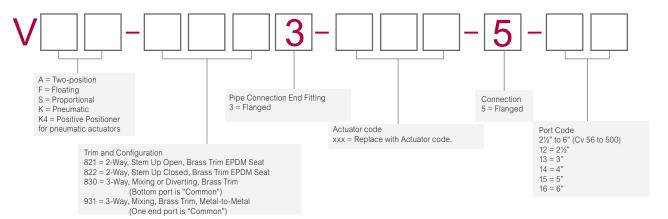


chart on page 70..

VB-8xx3/9313 Close-Off Ratings

The following tables offer a quick guide to valve actuator combination/close-off ratings. Please refer to specific close-off ratings.

VB-8xx3 and VB-9313 Close-Off ratings Spring Return Electric Actuator Mx41-715x Mx40-717x Mx61-720x Included with AV-607-1d AV-609-1e AV-607-1d AV-609-1° Linkage No act Single Single Single Single Dual Single Pipe size VB-82x3ª 2 1/2" 3" 125/35 125/35 125/35 4" 5" 125/25 125/35 6" 125/22 125/35 Pipe size VB-83038 2 ½" 3" 35/35 35/35 35/35 4" 5" 35/35 32/28 35/31 6" 35/35 15/11 16/12 35/31 VB-9313b Pipe size 70 33 40 84 2 1/3" 22 27 57 3" 48 4" 12 27 33 15 5" 9 10 6" 6

			Non-Spri	ng Return I	Electric		Pne	eumatic Spring (with 5 to 10)		air		
Actuator	Mx41	-6153	Mx41-	6343	M800A	M1500A	MK-6811	MK-8811	MK-6911	MK-8911		
Linkage	AV-6	07-1d	AV-60	AV-609-1e AV-822		AV-822	AV-497c	AV-496	AV-497	AV-496		
No act	Single	Dual	Single	Dual		Single						
Pipe size						VB-82x3 ^a						
2 ½"												
3"							125/35					
4"						125/35	120/30					
5"												
6"			125/25	125/35					125/35			
Pipe size						VB-8303ª						
2 ½"												
3"							35/35					
4"						35/35	30/30					
5"												
6"									35/35			
Pipe size						VB-9313 ^{b,f}						
2 ½"	33	70	46	96	29	61	40d/30u*	91d/60u*				
3"	22	48	31	66	19	42	27d/20u*	62d/40u*				
4"	12	27	18	38	10	22	14d/10u*	33d/25u*				
5"		9		24		14				20d/15u*		
6"		6		17		9				13d/10u*		



U-Bolt Mount

More information on VB-8303: Scan the QR code or visit the link below.



Visit: http://goo.gl/3fMhfY

More information on VB-8213: Scan the QR code or visit the link below.



Visit: http://goo.gl/VEAV7e

- $a VB 8xxx First\ value = maximum\ Close\ off\ pressure,\ Second\ value = maximum\ operating\ differential.\ (Example:\ 125/35).$
- b VB-9213/VB-9223 2-Way valves have the same close offs as VB-9313 valves.
- c VB-8xx3 valves use AV-497 linkage, VB-9313 valves use AV-495 linkage.
- $d-AV-607-1 \ (21\%" \ to \ 5" \ VB-8000 \ valves \ or \ 21\%" \ to \ 4" \ VB-9313 \ valves), \ the \ Mx41-634x \ actuator \ is \ not \ compatible \ with \ the \ AV-607-1 \ linkage.$
- $e-AV-609-1\ (6"VB-8000\ valves\ or\ 5"\ to\ 6"VB-9313\ valves),\ the\ AV-609-1\ linkage\ can\ be\ used\ with\ the\ Mx41-634x\ actuator\ on\ 2\ 1/2"\ to\ 5"VB-8000\ valves\ or\ 5"\ valves),\ the\ AV-609-1\ linkage\ can\ be\ used\ with\ the\ Mx41-634x\ actuator\ on\ 2\ 1/2"\ to\ 5"VB-8000\ valves\ or\ 5"\ or\$
- $8000\ valves\ or\ 21\!/\!_{2}"\ to\ 4"\ VB-9313\ valves,\ but\ the\ valve\ will\ stroke\ over\ a\ shorter\ portion\ of\ the\ control\ Input\ signal$
- f Stem up (B to AB flow, A port closed. stem down (A to AB flow, B port closed)

^{*}d and u indicate d (stem down) u (stem up)


VB-82x3 2-Way Globe Valves with NSR Actuators


Actuator combinations and operating pressure differentials

Choose a valve assembly with a maximum operating differential pressure capability sufficient for the application. Consult close-off pressure ratings. Not all actuator and valve body combinations are offered as factory assemblies.

					M1500A	Mx41-634x	<
					Actuator out	put rating (minin	num)
					337 lbf (1500 N)	300 lb-in (34 N-m)	
						uator model tuator code)	
Non-Spring Return (N: 2-Way Globe Valve As					Floating/ Proportional M1500A (686)	Floating MF41-634; Proportion MS41-634; MS41-634	n al 0 (512)
					Linkage	Kit part number	r
					AV-822 (2½" to 6")	AV-609-1 (6")	
Close-off pressure (ps	i)				125		
					Maximum allowa	ble operating dif	ferentialc
Valve Assembly part number ^a	P code	Valve size in.	Cvb	kvsb	M1500A	Single Actuator	Dual Actuatord
	12	2½	56	48			
	13	3	85	74			
Vx-8213-xxx-5-P Vx-8223-xxx-5-P	14	4	145	125	35 (240)		-
	15	5	240	208			

a - See "VB-8000, VB-9000 Assembly Selection Procedure" on page 150 for the relevant part series to determine a specific part no.





Actuator

b - $C_v = \underline{gpm}$ (where ΔP is measured in psi) kvs = Cv / 1.156 $K_{vs} = \underline{m^3/h}$ (where ΔP is measured in bar; ΔP (where ΔP is measured in 1 bar = 100 kPa).


c - Maximum allowable differential across the valve in any open position. Less than 20 psi recommended for quieter service. Consult close-off pressure ratings. d - Dual actuators are not available as a factory assembly.

VB-8303 3-Way Globe Valves with NSR Actuators

3-Way Globe Valve Assemblies

Choose a valve assembly with a maximum operating differential pressure capability sufficient for the application. Consult close-off pressure ratings. Not all actuator and valve body combinations are offered as factory assemblies.

3-Way Globe Valve Assemblies with Non-Spring Return Actuators



Linkage kit part number AV-822 AV-609-1 (6") (2½" to 6") 35

Close-off	pressure	(psi)

Non-Spring Return (NSR)

3-Way Globe Valve Assemblies

Valve assembly part	mbly rt P code		Cvb	kvsb	Maximum allowable o	perating differe (mixing/divertin	
numberª					M1500A	Single Actuator	Dual Actuator ^d
			80°	69°			
	12	2½	95 ^f	82 ^f			
			115º	99 ⁹			
			110e	95°			
Vx-8303-	13	3	120 ^f	104 ^f	35 (240)		-
xxx-5-P			120 ⁹	104 ^g			
	14	4	190 ^h	164 ^h			
	15	5	290h	251 ^h			
	16	6	500 ^h	433 ^h		32 (219) 28 (192)	35 (240)

a - See "VB-8000, VB-9000 Assembly Selection Procedure" on page 150 for the relevant part series




kvs = Cv / 1.156


 $K_{vs} = \underline{m^3/h}$ (where ΔP is

measured in bar:

- c Maximum allowable differential across the valve in any open position. Recommend less than 20 psi
- for quieter service. Consult close-off pressure ratings. d Dual actuators are not available as a factory assembly.
- e Mixing configuration, ports A and B are inlets, AB port is outlet.
- f Diverting configuration, flow AB to A port.
- g Diverting configuration, flow AB to B port.
- h All flow configurations, mixing or diverting




Vx-8303 with M1500A Actuator




Vx-8303 with Mx41-634x Actuator

VB-8000 3-Way Flow Patterns



VB-8303 2½...6" 3-Way Mixing Stem Up Flow is B Port to Common Bottom AB Port



VB-8303 2½...6" 3-Way Diverting Stem Up Flow is Common Bottom AB Port to B Port



VB-82x3 2-Way Globe Valves with SR Actuators

					Mx61-720x	Mx41	-715x	Mx40	1-717x
Spring Return 2-Way Globe Valv	/e Assem	blies							
						Actuator outpo	ut rating (minim	um)	
					220 lbf (979 N)	133 lb-in	(15 N-m)	150 lb-in	(17 N-m)
						Actuator mode	els (Actuator co	des)	
			MA61-7200 MA61-7203 (596) Floating MF61-7203 (596) Proportional MS61-7203 (596) MS61- 7203-040 MS61-7203-050	MA41-7150 MA41-7151 MA41-7151 MA41-7153 (556) MA41-7150-502 MA41-7153-502 MA41-7153-502 Floating MF41-7153 (556) MF41-7153 (556) MF41-7153-502 Proportional MS41-7153 (556) MS41-7153 (556) MS41-7153-502			6)		
						Linkage k	it part number		
					None AV-607-1 (2½" to 5") (Part of Actuator) AV-609-1 (6")			AV-607-1 (2½" to 5") AV-609-1 (6")	
CI	ose-off pr	essure (ps	i)				125		
	Close-off pressure (psi)		0.5	kvsb	N	/laximum allowab pressur	le operating diff rec, psi (kPa)	erential	
Valve assembly	P code	P code Valve Cv ^b size in.		14 04 700	Single	Dual Actuator ^d	Single Actuator	Dual Actuator	
Valve assembly part number ^a	P code		Cν		Mx61-720x	Actuator			
	P code		56	48	MX61-72UX	Actuator			
part number ^a		size in.		48				25 (240)	
part number ^a √x-8213-5xx-5-P	12	size in.	56		MX61-72UX 35 (240)	35 (240)	-	35 (240)	-
	12	2½ 3	56 85	74			-	35 (240)	-

a - See "VB-8000, VB-9000 Assembly Selection Procedure" on page 150 for the relevant part series to determine a specific part number. b - $C_v = \frac{gpm}{\Delta P}$ (where ΔP is measured in psi) kvs = Cv / 1.156 $K_{vs} = \frac{m^3/h}{\Delta P}$ (where ΔP is measured in bar; 1 bar = 100 kPa).



c - Maximum allowable differential across the valve in any open position. Less than 20 psi recommended for quieter service. Consult close-off pressure ratings.

d - Dual actuators are not available as factory assemblies.

VB-8303 3-Way Globe Valves with SR Actuators

3-Way Globe Valve Assemblies with Spring Return Actuators

3-Way Globe Valve Assemblies

Choose a valve assembly with a maximum operating differential pressure capability sufficient for the application. Consult close-off pressure ratings. Not all actuator and valve body combinations are offered as factory assemblies.

Mx61-720x Mx41-715x Mx40-717x Spring Return (SR) 3-Way Globe Valve Assemblies Actuator output rating (minimum) 220 lbf 150 lb-in 133 lb-in (979 N) (15 N-m) (17 N-m) Actuator models (Actuator codes) Two-position Two-position Two-position MA61-7200 MA41-7150 MA40-7170 MA61-7203 (596) MA41-7151 MA40-7173 (576) MA41-7153 (556) MA41-7150-502 Floating Floating MF61-7203 (596) MA41-7151-502 MF40-7173 (576) MA41-7153-502 Proportional Proportional MS61-7203 (596) Floating MS40-7170 MS61-7203-040 MF41-7153 (556) MS40-7171 MS61-7203-050 MF41-7153-502 MS40-7173 (576) Proportional MS41-7153 (556) MS41-7153-502 Linkage kit part number AV-607-1 (2½" to 5") AV-AV-607-1 (21/2" to 5") AV-609-None (Part of Actuator) 609-1 (6") Close-off pressure (psi) Maximum allowable operating differential pressure^c, psi (kPa) (mixing/diverting) Valve assembly Р Valve Cv^{b} kvs part number code size in. Single Dual Single Dual Mx61-720x Actuator Actuatord Actuator Actuatord 80e 69e 12 21/2 95f 82f

35 (240) /

35 (240)

13

15

16

Vx-8303-5xx-5-P

115g | 99g

110e 95e

120f | 104f

120g | 104g

290h

500h

190h | 164h

251h

433h

4

5

6



35 (240) /

35 (240)

35 (240) /

35 (240)

35 (240) /

31 (212)

16 (110) /

12 (82)

35 (240) /

35 (240)

35 (240) /

31 (214)

 $VB-8303\ 2\%...6"\ 3-Way\ Mixing\ Stem\ Up \quad VB-8303\ 2\%...6"\ 3-Way\ Diverting\ Stem\ Up\ Flow\ is\ B\ Port\ to\ Common\ Bottom\ AB\ Port\ Flow\ is\ Common\ Bottom\ AB\ Port\ to\ B\ Port\ New Po$



35 (240) /

35 (240)

32 (219) /

28 (192)

15 (103) /

11 (75)

a- See "VB-8000, VB-9000 Assembly Selection Procedure" on page 150 for the relevant part series to determine a specific part number b- $C_v = \underline{gpm}$ (where ΔP is measured in psi) kv = Cv / 1.156 $kv = \frac{m^3/h}{\Delta P}$ (where ΔP is measured in bar; 1 bar = 100 kPa).

c- Maximum allowable differential across the valve in any open position. Recommend less than 20 psi for quieter service. Consult close-off pressures.

d- Dual actuators are not available as factory assemblies

e- Mixing configuration, ports A and B are inlets, AB port is outlet.

f- Diverting configuration, flow AB to A port.

g- Diverting configuration, flow AB to B port.

h- All flow configurations, mixing or diverting.


Vx-9313 3-Way Globe Valves with Linear SR Actuators

3-Way Linked Globe Valve Assemblies with Linear Series Actuators

Choose a valve assembly with a maximum operating differential pressure capability sufficient for the application. Consult close-off pressure ratings. Not all actuator and valve body combinations are offered as factory assemblies.

3-Way Globe Valve Assemblies with Linear Spring Return Actuators

3-Way Linked Globe Valve Assemblies^a





Actuator force rating

220 lbf (979 N)

Actuator model (Actuator code)

Two-position MA61-7200

MA61-7201 MA61-7203 (596)

Floating MF61-7203 (596)

Proportional MS61-7203 (596) MS61-7203-040 MS61-7203-050

Valve assembly part number ^b	P code	Valve size in. (mm)	Cv°	kvs°	Actuator Close-off pressure (psi) ^{ad}
Vx-9313-xxx-5-P	12	2½ (65)	74.0	64	33
VX-9313-XXX-3-P	13	3 (80)	101.0	87	22
Vx-9313-xxx-5-P	14	4 (N/A)	145.0	125	12

a - For piping information refer to the separately available Wiring, Dimensions and Reference document F-28125 from the mySchneider

c - $C_v = \frac{gpm}{\Delta P}$ (where ΔP is measured in psi) kvs = Cv / 1.156 $K_{vs} = \underline{m^3/h}$ (where ΔP is measured in bar; 1 bar = 100 kPa). ΔΡ

 $d-Close-off\ pressure\ ratings\ describe\ only\ the\ differential\ pressure\ which\ the\ actuator\ can\ close-off\ with\ adequate\ seating\ force.\ Consult$ valve body specifications for other limitations. The rating value is the pressure difference between the inlet and outlet ports.




download center. b - To determine a specific part number, see "VB-8000, VB-9000 Assembly Selection Procedure" on page 150 for the relevant part

Vx-9313 3-Way Globe Values with Linked SR Actuators

3-Way Linked Globe Valve Assemblies with Spring Return Actuators





Mx41-707x	Mx41-715x	Mx40-717x
	Actuator Torque Rating (minimum)	
60 lb-in (7 N-m)	133 lb-in (15 N-m)	150 lb-in (17 N-m)
	Actuator Model (Actuator Code)	
Two-Position MA41-707x (544) Floating MF41-7073 Proportional MS41-7073	Two-Position MA41-7150 MA41-7151 MA41-7153 (556) MA41-7150-502 MA41-7151-502 MA41-7153-502 Floating MF41-7153 (556) MF41-7153-502 Proportional MS41-7153-502	Two-Position MA40-717x Floating MF40-7173 Proportional MS40-717x (576)
	Linkage Kit Part Number	
AV-607-1 (2½"4")	AV-607-1 (2½"4") AV-609-1 (5" and 6")	AV-607-1 (2½"4") AV-609-1 (5" and 6")

Value Assembly	Р	Valve Size			Actuator Close-off Pressure (psig) ^d							
Valve Assembly Part Number ^b	Code	in. (mm)	Cv ^c	kv _s °	Single Actuator	Dual Actuatore	Single Actuator	Dual Actuatore	Single Actuator	Dual Actuator e		
	12	2½ (65)	74.0	64	24	52	33	70	40	84		
	13	3 (80)	101.0	87	16	35	22	48	27	57		
Vx-9313-xxx-5-P	14	4 (N/A)	145.0	125	9	20	12	27	15	33		
	15	5 (N/A)	235.0	203				9	-	10		
	16	6 (N/A)	350.0	303		-		6	-	7		


- a For piping information refer to the separately available Wiring, Dimensions and Reference document F-28125 from the mySchneider download center.
- b To determine a specific part number, see "VB-8000, VB-9000 Assembly Selection Procedure" on page 150 for the relevant part series. c $kvs = m^3/h$ ($\Delta P = 100 kPa$) kvs = Cv / 1.156 $Cv = kvs \times 1.156$
- d Close-off ANSI III (0.1%) for metal-to-metal seats with pressure at inlet (port A).
- e Dual actuators are not available as factory assemblies.




Vx-9313 3-Way Globe Values with Linked SR Actuators

3-Way Linked Globe Valve Assemblies with Non-Spring Return Actuators





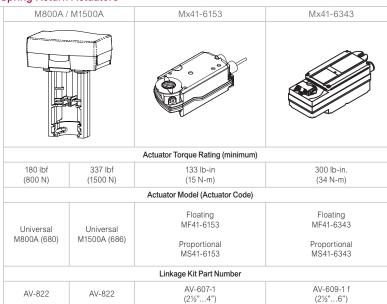

					(2/2)								
Value Assembly	Р	Valve Size			Actuator Close-off Pressure psiad								
Valve Assembly Part Number ^b	Code	in.	Cvc	kv _s ^c	AV-822	AV-822	Single Actuator	Dual Actuator ^e	Single Actuator	Dual Actuator ^e			
	12	2½	74.0	64	29	61	33	70	46	96			
	13	3	101.0	87	19	42	22	48	31	66			
Vx-9313-xxx-5-Pf	14	4	145.0	125	10	22	12	27	18	38			
	15	5	235.0	203		14		9		24			
	16	6	350.0	303	-	9	-	6	-	17			

a - For piping information refer to the separately available Wiring, Dimensions and Reference document F-28125 from the mySchneider download center.

f - Mx41-634x actuators used on 2½" to 4" Vx-9313 will stroke over a shorter portion of the control input signal.



b - To determine a specific part number, see "VB-8000, VB-9000 Assembly Selection Procedure" on page 150 for the relevant part series. c - $kvs = m^3/h$ ($\Delta P = 100 kPa$) kvs = Cv / 1.156 $Cv = kvs \times 1.156$

d - Close-off ANSI III (0.1%) for metal-to-metal seats with pressure at inlet (port A).

e - Dual actuators are not available as factory assemblies

VB-82x3 2-Way Globe Valves with Pneumatic SR Actuators

2-Way Valves

Choose a valve assembly with a maximum operating differential pressure capability sufficient for the application. Consult the table below for close-off pressure ratings. Not all actuator and valve body combinations are offered as factory assemblies.

2-Way Globe Valve Assemblies with Pneumatic Spring Return Actuators MK-6811b MK-6911^b Pneumatic Spring Return 2-Way Globe Valve Assemblies (shown with Positive Positioner) Actuator models (Actuator codes) MK-6811 (602) MK-6911 (652) Linkage kit part number AV-497 AV-497 Spring range, psig (kPa) 5 to 10 (34 to 69)a 5 to 10 (34 to 69)a Ш Ш ш Close-off pressure (psi) 125 Valve size Maximum allowable operating differential Cvc kvs part numberb Code pressured, psi (kPa) VK-8213-602-5-12 VK-8223-602-5-12 12 21/2 56 48 VK4-8213-602-5-12 VK4-8223-602-5-12 VK-8213-602-5-13 VK-8223-602-5-13 13 3 85 74 VK4-8213-602-5-13 VK4-8223-602-5-13 35 (240) VK-8213-602-5-14 VK-8223-602-5-14 14 4 145 125 VK4-8213-602-5-14 VK4-8223-602-5-14 VK-8213-602-5-15 VK-8223-602-5-15 VK4-8213-602-5-15 15 5 240 208 VK4-8223-602-5-15 VK4-8213-652-5-16 16 6 370 320 35 (240) VK4-8223-652-5-16

d - Maximum allowable differential across the valve in any open position. Less than 20 psi recommended for quieter service. Consult close-off pressure ratings.





VB-8303 2½...6* 3-Way Mixing Stem Up Flow is B Port to Common Bottom AB Port Flow is Common Bottom AB Port to B Port

a - Spring range field adjustable with Positive Positioner.

b - AK-42309-500 Positive Positioner optional for 2½" to 5" valve, required for 6" valve. Supplied as standard on VK4 factory valve assemblies. See "VB-8000, VB-9000 Assembly Selection Procedure" on page 150 for the relevant part series to determine a specific part number.

 $C - C_v = \frac{gpm}{\Delta P} \quad \text{(where ΔP is measured in psi)} \qquad \text{kvs} = C_V / 1.156 \qquad K_{vs} = \frac{m^3/h}{\Delta P} \quad \text{(where ΔP is measured in bar; 1 bar = 100 kPa)}.$

VB-8303 3-Way Globe Valves with Pneumatic SR Actuators


3-Way Valves

Choose a valve assembly with a maximum operating differential pressure capability sufficient for the application. Not all actuator and valve body combinations are offered as factory assemblies.

3-Way Globe Valve Assemblies with Pneumatic Spring Return Actuators MK-6811^b MK-6911b Spring Return 3-Way Globe Valve Assemblies (shown with Positive Positioner) Actuator models (Actuator codes) MK-6811 (602) MK-6911 (652) Linkage kit part number AV-497 AV-497 Spring range, psig (kPa) 5 to 10 (34 to 69)^a 5 to 10 (34 to 69)^a Close-off pressure (psi) Valve assembly Maximum allowable operating differential Valve size in. kvs part number code pressured, psi (kPa) (mixing/diverting) VK-8303-602-5-12 12 2½ 95^f 82^f 1159 110e 95∘ 35 (240) / 35 (240) VK-8303-602-5-13 13 3 120^f 104^f 120⁹ VK-8303-602-5-14 14 4 190^h 164h VK-8303-602-5-15 15 5 290^h VK4-8303-602-5-15 VK4-8303-652-5-16 16 433h 35 (240) / 35 (240)

h - All flow configurations, mixing or diverting.





VB-8303 21/2...6" 3-Way Diverting Stem Up Flow is Common Bottom AB Port to B Port



a - Spring range field adjustable with Positive Positioner.

b - AK-42309-500 Positive Positioner optional for 21/2" to 5" valve, required for 6" valve. Supplied as standard on VK4 factory valve assemblies. See "VB-8000, VB-9000 Assembly Selection Procedure" on page 150 for the relevant part series to determine a specific part number.

 $K_{vs} = \frac{m^3/h}{2}$ (where ΔP is measured in bar; 1 bar = 100 kPa). $c - C_v = \frac{gpm}{\Delta D}$ (where ΔP is measured in psi) kvs = Cv / 1.156

d - Maximum allowable differential across the valve in any open position. Less than 20 psi recommended for quieter service. Consult close-off pressure ratings.


e - Mixing configuration, ports A and B are inlets, AB port is outlet. f - Diverting configuration, flow AB to A port.

g - Diverting configuration, flow AB to B port.

VB-9313 3-Way Globe Valves with Pneumatic SR Actuators








Select Actuator or Actuator code (xxx) having sufficient close-off for the application. If selecting component parts, select Positive Positioner, if required.

Note: For higher close-offs, use VB-8303 balanced valves with common bottom port.



VK4-9313 with a MK-6811 Pneumatic Actuator and AK-42309-500 Positive Positioner

21/2" to 6" Flanged Globe Valves with Pneumatic Actuators

Actuator	MK-6811	MK-8811	MK-8911			
Effective area (stroke)	50 Sq. In. (1 " Stroke)	100 Sq. In. (1 " Stroke)	100 Sq. In. (2" Stroke)			
Positive Positioner	AK-42309-500	AK-42309-500				
Factory assembly with Positive Positioner	Yes	Yes	Yes			
Actuator code (xxx)	602 ^f	802°	812°			
Spring range (psig)	5 to 10	5 to 10	5 to 10			


Actuator close-off pressure rating (psi)ab

Supply air pressure (ps	15/20	15	20	15/20	15	20	15/20	15	20			
Stem positionc				SU	SD	SD	SU	SD	SD	SU	SD	SD
Valve Assembly	Valve Body	P code	Size in.									
		-12	21/2	30	40	91	60	91	405			
VK4-9313-xx2-5-Pd	VB-9313-0-5-P	-13	3	20	27	62	40	62	125	-		
		-14	4	10	14	33	25	33	73			
VK4-9313-812-5-Pd VB-9313-0-5-P		-15	5							15	20	45
VIV4-3313-012-3-Fu	VB-9313-012-3-Fu		6] -						10	13	30

a - Close-off ratings for mixing valves: (SU = "A", SD = "B" port). "A" port (SU) ratings equal pressure at port "A" minus pressure at port "B"

Optional Input signal Interface to Pneumatic Actuator

Input signal Type	Interface Module Required
Two-position, SPST (Electric)	AL-1xx
Two-position, SPDT Snap Acting (Electric)	AL-1xx



[&]quot;B" port (SD) ratings equal pressure at port "B" minus pressure at port "A". Close-off ratings in the table are true only when the indicated supply air pressure is applied to the actuator. A change in air pressure at the actual close-off pressure.

b - Close-off pressure ratings describe only the differential pressure which the actuator can close-off to standards with adequate seating force. Consult valve body specifications for other limitations.
c - SU - Stem Up; SD - Stem Down. For piping information refer to the separately available Wiring, Dimensions and Reference document


F-28125 from the mySchneider download center for flow pattern. d - Factory valve assemblies are available only with Positive Positioner.


e - Includes AV-496 linkage.

f - Includes AV-495 linkage.

VB-9313 3-Way Valves with M900Axx SR Actuators


Schneide	Electric VB-9313 Valve Bodies			
Application		Chilled or Hot Water		
Size		2½"4"		
Valve Body	Part Number	VB-9313-0-5-P		
Linkage Kit	Part Number	AV-822		
	Flow Characteristic	Nominally Linear		
	Body	Cast Iron		
	Seat	Bronze		
Material	Stem	Stainless Steel		
	Plug	Brass		
	Packing	Spring Loaded TFE/EPDM		
	Disc	None		
ANSI Pressi	ure Class, psig	125		
Allowable C	ontrol Media Temperature, °F (°C)	40°F300°F (4°C149°C)		
Allowable D	ifferential Pressure, Water, psi (kPa)ª	35 psi (241 kPa) Max.		
P Code	Valve Size, In.	C _v (k _{vs}) Rating ^b		
12	21/2	74 (64)		
13	3	101 (87)		
14	4	170 (147)		








 $K_{vs} = \frac{m^3/h}{\Delta P}$ (where ΔP is measured in bar; 1 bar = 100 kPa).



3-Way Valves

3-Way mixing ANSI 125 Flanged Cast Iron Body ASA Flanged



VB-9313 3-Way Mixing Flow Pattern

	Schneider Electric SpaceLogic Actuator Model Table										
Model	Actuator Code	Force	Power	Running Watts	Trans- former Size	Floating Control ^{a,b}	Proportional Control ^b	Feed- back ^a	(2) SPDT Aux Switches ^e	Linkage ^c	Spring Return Action
M900AR	650										Return
M900AE ^d	-				50 Va	Yes			No	AV-822	Extend
M900ARW	660	157 lbf (700	157 lbf 24 Vac (700 50/60 Hz	21 W			210 Vdc, Vd	210 Vdc or			Return
M900ARW-S2d	-	Ň)						0-5 Vdc	041/ 4-		Return
M900AEW-S2d	-								24 Vac 4a		Extend

a - Dip switch selectable.

c - Order separately.

Restrictions on Ambient Temperature for SpaceLogicL Valve Actuators							
Fluid Temperature in Valve Body Maximum Allowable Ambient Temperature ^a							
Chilled Water	122°F (50°C)						
281°F (138°C)	113°F (45°C)						
300°F (149°C)	107°F (42°C)						
340°F (171°C)	100°F (38°C)						
366°F (186°C)	90°F (32°C)						

a - Minimum allowable ambient operating temperature 14°F (-10°C).



b - 0...5, 2...6 or 5...10, 6...10 also selectable by dip switch.

d - Factory assemblies not offered.

e - S2 auxiliary switches may be added in the field.

VB-9313 3-Way Valves with M900Axx SR Actuators

	Select Valve Actuator Combination Having Sufficient close-off for Application									
Valve Body	Valve Action	P Code	Cv	Size	Close-off Ratings PSI	Maximum Operating Pressure Differential				
					M900Axx ^a					
		12	67 (58)	2 ½"	29	35				
VB-9313-0-5-P	3 Way	13	91 (79)	3"	19	35				
		14	170 (147)	4"	10	35				


a - Requires AV-822 Linkage Order Separately.

	Factory Valve and Actuator Assemblies								
VB-9313 Series Valve Assembly Part Numbers ^a	P Code	Size	Valve Action Stem UP	M900AR (650) or M900ARW (660) Action on Power Loss					
	12	2 ½"							
VU-9313-6x0-5-P (Mixing):	13	3"	Flow B to AB	Flow B to AB					
(Wixing).	14	4"							


a - 650 = M900AR, 660 = M900ARW.

	VB-9313 Valve Body and M900Axx Spring Return Actuator Actions								
				M900ARx			M900AEx		
Valve Body Part Number	Valve Body Description	Valve Body Stem Up Water Flow	Unpowered Valve As- sembly Water Flow	Switch 7 off, Loss of Control Signal Only	Switch 7 on, Loss of Control Signal Only	Unpowered Valve Assem- bly Water Flow	Switch 7 off, Loss of Control Signal Only	Switch 7 on, Loss of Control Signal Only	
VB-9313-0-5-P	3-Way Mixing	Flow B to AB	Flow B to AB	Flow B to AB	Flow A to AB	Flow A to AB	Flow A to AB	Flow B to AB	

3-Way Flanged Valve Body Flow Patterns







VB-9313 3-Way Mixing Flow Patterns

Mx41-715x 133 lb-in SR SmartX Actuators

Mx41-7153 Series SmartX Actuator (Code 556) 24 Vac (Linkage not shown)

Mx41-7150 Series SmartX Actuator (Code 552) 120 Vac (Linkage not shown)

Mx41-7153









Mx41-7150



(€

Specifications									
Connection	3 ft. (0.9 m) Appliance cable	3 ft. (0.9 m) Appliance cable							
Housing	Aluminum die-cast								
Enclosure rating	NEMA 2 with conduit connector down								
Dimensions	10½ x 4 x 3½ (267 x 110 x 89 mm)								
Linkage	AV-607-1 (2½" - 5" VB-8000 valves or 2½" - 4" VB-9 AV-609-1 (6" VB-8000 valves or 5" - 6" VB-9313 valv								
Position indicator	Visual indicator								
Override	Manual								
Motor type	Brushless								
Rotation	0 to 90°								
Control signal	MA41-7153: 2-position SPST MF41-7153: Floating MS41-7153: 2 to 10 VDC The 2 to 10 VDC Control signal is factory set for direct action. It can be changed in the field to reverse action.	MA41-7150: 2-position SPST							
Voltage	24 Vac ± 20%, 22-30 VDC	120 Vac ± 10%							
VA@60 HZ	9.7	10.0							
Feedback	MA41 and MF41: None MS41: 2 to 10 VDC	None							
Auxiliary switch	None								
Timing (seconds)	Powered <190 Spring return <30								
Installation instructions	F-26642								
	Note: Single mount actuators may be factory assembled, dual mount are field assembled.	Flanged Valve Close-off. 2-Way ratings are better than ANSI IV (0.01% leakage) with EPDM seating. 3-Way ratings are better than ANSI III (0.1% leakage) with metal seating.							

VB-9313 3-Way Valves with M900Axx SR Actuators

Select Valve Actuator Combination Having Sufficient close-off for Application							
Valve Body	Valve Action	P Code	Cv	Size	Close-off Ratings PSI	Maximum Operating Pressure Differential	
					M900Axx ^a		
		12	67 (58)	2 ½"	29	35	
VB-9313-0-5-P	3 Way	13	91 (79)	3"	19	35	
		14	170 (147)	4"	10	35	


a - Requires AV-822 Linkage Order Separately.

Factory Valve and Actuator Assemblies						
VB-9313 Series Valve Assembly Part Numbers ^a	P Code	Size	Valve Action Stem UP	M900AR (650) or M900ARW (660) Action on Power Loss		
	12	2 ½"				
VU-9313-6x0-5-P (Mixing):	13	3"	Flow B to AB	Flow B to AB		
(Wilking).	14	4"				


a - 650 = M900AR, 660 = M900ARW.

VB-9313 Valve Body and M900Axx Spring Return Actuator Actions								
				M900ARx M900AEx			M900AEx	
Valve Body Part Number	Valve Body Description	Valve Body Stem Up Water Flow	Unpowered Valve Assembly Water Flow	Switch 7 off, Loss of Control Signal Only	Switch 7 on, Loss of Control Signal Only	Unpowered Valve Assembly Water Flow	Switch 7 off, Loss of Control Signal Only	Switch 7 on, Loss of Control Signal Only
VB-9313-0-5-P	3-Way Mixing	Flow B to AB	Flow B to AB	Flow B to AB	Flow A to AB	Flow A to AB	Flow A to AB	Flow B to AB

3-Way Flanged Valve Body Flow Patterns







VB-9313 3-Way Mixing Flow Patterns

Mx40-717x 150 lb-in SR SmartX Actuators

Mx40-7173 Series SmartX Actuator (Code 576) 24 Vac (Linkage not shown) Mx40-7170 Series SmartX Actuator 120 Vac (Linkage not shown)

Mx40-7173

















Specifications						
Connection	3 ft. (0.9 m) Appliance cable					
Housing	Aluminum	die-cast				
Enclosure rating	NEMA 1, NEMA 4 with customer	supplied water tight connector				
Dimensions	10-7/8 x 4 x 4 (276	x 100 x 100 mm)				
Linkage	AV-607-1 (2½" - 5" VB-8000 valves or 2 (6" VB-8000 valves or 5					
Position indicator	Visual in	dicator				
Override	Nor	ne				
Motor type	Brush	lless				
Rotation	0 to 90	° CW				
Control signal	MA41-7173: 2-position SPST MF41-7173: Floating MS41-7173: 2 to 10 VDC/4 to 20 mA	MA40-7170: 2-position SPST MS40-7170: 2 to 10 VDC/4 to 20 mA				
Voltage	24 Vac ± 20%, 22-30 VDC	120 Vac ± 10%				
VA@60 HZ	MA40-7173: 7.4 (AC) MF40-7173: 8.1 (AC) MS40-7173: 7.8 (AC)	MA40-7170: 8.4 MS40-7170: 8.5				
Watts @ 60 Hz	MA40-7173: 5.3 (AC) MF40-7173: 5.8 (AC) MS40-7173: 5.5 (AC)	MA40-7170: 6.2 MS40-7170: 6.4				
Feedback	2 to 10 VDC	2 to 10 VDC (MS only)				
Auxiliary switch	Nor	ne				
Timing (seconds)	Powered 147 Spring return 65	Powered 162 Spring return 82				
Installation instructions	MA40-7173: F-26742 MF40-7173: F-26749 MS40-7173: F-26748	MA40-7170: F-26742 MS40-7170: F-26748				
	Note: Single mount actuators may be factory assembled, dual mount are field assembled.	 Flanged Valve Close-off. 2-Way ratings are better than ANSI IV (0.01% leakage) with EPDW seating. 3-Way ratings are better than ANSI III (0.1% leakage) with metal seating. 				
		Note: Single mount actuators may be factory assembled, dual mount are field assembled.				

Mx61-720x 220 lbf SR SmartX Actuators

More information: Scan the QR code or visit the



Visit: http://goo.gl/dJri2c

Mx61-7203 Series SmartX Actuator 24 Vac MA61-7200 Series SmartX Actuator 120 Vac



MA61-7200



Charifications				
Specifications				
Connection	MS61-7203: 3 ft. (0.9 m) Plenum cable MS61-7203-040/050: 3 ft. (0.9 m) appliance wire			
Housing	Aluminum die-cast			
Enclosure rating	NEMA 2			
Dimensions	9-9/16 x 10-5/8 x 2-9/16 (243 x 270 x 65 mm)		
Linkage	(included)			
Position indicator	Visual indicator			
Override	Manual			
Motor type	Brushless			
Rotation	0 to 90° CW			
Control signal	MA61-7203: 2-position SPST MF61-7203: Floating MS61-7203: 2 to 10 VDC MS61-7203-040: 2 to 10 VDC MS61-7203-050: 0 to 10 VDC The 2 to 10 VDC Control signal is factory set for direction action. It can be changed in the field to reverse action.	2-position SPST		
Voltage	24 Vac ± 20%, 22-30 VDC	120 Vac ± 10%		
VA@60 HZ	9.7	10.0		
Watts @ 60 Hz	7.7	8.4		
Feedback	MA61 and MF61: None MS61: 2 to 10 VDC only. MS61-7203-040 has no feedback.	None		
Auxiliary switch	None			
Timing (seconds)	Powered <190 Spring return <40			
Installation instructions	F-27120			

Mx61-634x 300 lb-in NSR SmartX Actuators

Mx41-6343 Series SmartX Actuator (Code 516) 24 Vac MS41-6340 Series SmartX Actuator (Code 512) 120 Vac

Mx41-6343













<u> </u>

Specifications		
Connection	24-inch (61 cm) Color-coded wires	3 ft. (91 cm) Color-coded wires
Housing	Aluminum die-cast	
Enclosure rating	NEMA 4 with customer supplied	ed water tight connector or plug
Dimensions	10-7/8 x 4 x 4 (276 x 100 x 10	0 mm)
Linkage	AV-609-1 (6" VB-8000 or 5" - 6" V actuator on 2½"-5" VB-8000 valve the control input signal.	B-9313 valves), the AV-609-1 linkage can be used with the Mx41-634x es or $2\frac{1}{2}$ "-4" VB-9313 valves but the valve strokes over a shorter portion of
Position indicator	Visual indicator	
Override	Manual	
Rotation	0 to 90° CW	
Control signal	MF41-6343: Floating MS41-6343: 2 to 10 VDC	MS41-6340: 2 to 10 VDC
Voltage	24 Vac ± 20%	120 Vac ± 10%
VA@60 HZ	MF41-6343: 7.1 MS41-6343: 8	4.7
Watts @ 60 Hz	MF41-6343: 3.8 MS41-6343: 8	8.4
Feedback	None	2 to 10 VDC
Auxiliary switch	None	
Timing (seconds)	<145	148
Installation instructions	F-26744 F-26745	F-26745

Note: Single mount actuators may be factory assembled, dual mount are field assembled.



Mx41-6153 133 lb-in NSR SmartX Actuators

Mx41-6153 Series SmartX Actuator (Code 512) 24 Vac

Mx41-6153





Specifications	
Torque	133 lb-in. (15 N-m).
Connections	3 ft. (0.9 m) long, 18 AWG leads
Rotation	CW / CCW
Shaft size	1/4 to ¾-in. (6.4 to 19 mm) dia., 1/4 to ½-in. (6.4 to 13 mm) sq.
Enclosure rating	NEMA Type 1, IP54 according to EN 60 529.
Dimensions	8-3/8 H x 3¼ W x 2-2/3 D" (210 x 80 x 70 mm)
Linkage	AV-607-1 (21/2" to 4" VB-9313 valves)
Position indication	Adjustable pointer
Override	Manual
Overload protection	Throughout rotation.
Angle of rotation	90° nominal (field adjustable to limit travel on either end of stroke).
Built-in auxiliary switches	Dual SPDT Auxiliary switches available on MS41-6153-502 only.
Operating temperature limits	-25 to 130°F (-32 to 55°C).
Wiring diagrams	MF41-6153, MS41-6153
Regulatory compliance	c-UL-us LISTED per UL 873 and CAN C22.2 No.24-93. CE compliant to directives LVD, EMC, and RoHS2.
Installation instructions	F-27215

Specifications - electrical and timing

	Ac	tuator input	s	Out	tputs	Approximate	
Part number	Control	Voltage	VA @ 60 Hz	Feedback	Auxiliary switch	Timing in seconds	Weight Ibs (kg)
	Control					Powered	
MF41-6153	Floating	24 Vac + 20% - 15%	3.0	None	. No	<125 (60 Hz)	2.2 (1)
MS41-6153	0 to 10			0 to 10 VDC			
MS41-6153-502	VDC	1370			2		



M800A, M1500A 180/337 lbf NSR SpaceLogic Actuators

M800A & M1500A Actuators 24 Vac - 20-29 VDC



VB-8000/VB-9313 Actuator Application

Valve Size	M800A* (180 lbf)	M1500A (337 lbf) Size
21/2"	•	•
3"	•	•
4"	•	•
5"		•
6"		•

Specif	icat	ions
--------	------	------

Specifications			
Stroke (M800, M1500)	U-Bolt style: >3/8" to 2" (9-52mm)		
Stroke Timing	Floating: 60 or 300 sec selectable, Proportional: 15 sec @1/2" stroke		
Linkage	AV-822		
Feedback AO	2 to 10 VDC		
Power supply type	Half wave		
Motor type	Brushless DC		
Enclosure	NEMA 2 (IP 54, vertical mount only) with both conduit connectors used. NEMA 1 IP40 with one connector used.		
Sound power level	Maximum 32 dba		
Ambient temperature storage	-13 °F to 149 °F (-25 to 65 °C) ambient		
Ambient temperature operational	122°F (50°C) For chilled water applications 113°F (45°C) ambient at 281°F (138°C) Fluid temperature 107°F (42°C) ambient at 300°F (149°C) Fluid temperature 100°F (38°C) ambient at 340°F (171°C) Fluid temperature 90°F (32°C) ambient at 366°F (186°C) Fluid temperature		
Minimum operating temperature	14° to 150° F (-10° to 50° C)		
Ambient humidity	15 to 95 % RH non-condensing		
Housing material	Die-cast aluminum		
Cover material	UL94 plenum rated plastic		
Regulatory compliance c-UL-us LISTED per UL 873 and CAN C22.2 No.24-93, CE compliant to and RoHS2 directives, and RCM marked for AUS/NZ.			

Specifications - electrical and control

Model	M800A	M800A-S2	M1500A	M1500A-S2
AC power	24 Vac +- 10% 50	0-60 Hz		
DC power	20 - 29 VDC 20 V	V	20 - 29 VDC 30 V	V
Running VA	15		24	
Transformer size VA	50			
Floating control	Yes			
Proportional control	0 to 10 VDC, 2 to	10 VDC or 4 to 20mA with	500 ohm resistor	
Feedback	2 to 10 VDC			
Force	180 lbf (800 N)		337 lbf (1500 N)	
2-SPDT aux switch	No	24 Vac 4a res	No	24 Vac 4a re

SpaceLogic M900A Series Spring Return Actuators

Product Description

The M900A series is a linear electro-mechanical actuator with "fail-safe" spring return operation for the control of 2-way and 3-way globe valves in:

- · Hot water and steam systems
- · Heating and cooling systems
- Air handling systems



The actuator automatically provides a consistent running time regardless of the valve stroke.

On power loss, the mechanical spring return mechanism drives the motor in turn, generating power to the board to control the spring return braking speed, avoiding mechanical stress and system water hammer. All actuators can be configured for either a 3-wire floating signal or various modulating control signals including sequencing.





Specifications

M900ARx M900AEx	Stem up (retract) Stem down (extend)
Voltage Supply	24 Vac ±10% 50-60Hz
Power Consumption Running Rest	30 VA (21 W) 7 W
Running Time Modulating Floating Spring Return	20 sec. 60/300 sec. (selectable) 18 sec
Transformer Sizing	50 VA
Stroke Range Factory Set	0.35 in1.2 in (930 mm) .0.8 in (20 mm)
Force, nominal	202 Lbf (900N)
Duty Cycle	20%/60 minutes (full load, high amb.) 80%/60 minutes (half load, room temp.)
Analog input Voltage Selectable Range Vdc	010 Vdc (factory) 210, 05, 26, 510, 610 420 Ma, with a 500 ohm resistor (included)
Position Feedback	210 Vdc or 05 Vdc (0100%)
Load	2 1117-
Electrical Terminals	18 gauge

Environmental Storage Ambient Humidity Range Min. Ambient Temp.	-13149 °F (-2565 °C) max. 95% non-condensing 14 °F (-10 °C)
Operating Max. Temp. 122 °F (50 °C) 113 °F (45 °C) 107 °F (42 °C) 100 °F (38 °C) 90°F (32 °C)	Chilled water applications at 281 °F (138°C) Fluid temp. at 300 °F (149 °C) Fluid temp. at 340 °F (171°C) Fluid temp. at 366 °F (186 °C) Fluid temp.
Enclosure Rating M900ARW, M900AEW M900AR, M900AE	NEMA 4 (IP65) NEMA 2 (IP54)
Sound Power Level	43 dBa
Materials	Aluminum
Conduit Connection	North American 1/2 in conduit con- nectors, two on the side, two on the bottom
S2 Auxillary Switch Relays (optional)	SPDT, 24Vac 4A resistive (contacts made at 5% and 95% of end stroke)



SpaceLogic M900A Series Spring Return Actuators

Weight Short Yoke Tall Yoke	6.9 lb (3.1 kg) 7.1 lb (3.2 kg)	
Agency Listings Environmental	UL873, cULus, RCM, CE RoHS, REACH	

Accessories


Part No.	Description	Required
AV-821	VB-7xxx series globe valve linkage kit	To mount the Tall U-Bolt M900A to VB-7xxx, order separately. F-27701
AV-822	VB-8xxx and VB-9313 Series 2-1/2 to 4" globe valve linkage kit	To mount the Tall U-Bolt M900A to VB-8xxx and VB-9313, order separately. F-27702
880 0104 000	S2 auxiliary end point switches	Optional Switches can be added to the standard models in the field

Available Products


Part Number	Spring Return	Tall U-Bolt Style ¹	Short Screw Mount Style ²	NEMA 4 Enclosure Rating	Auxiliary Switches
M900AR	Retract	X			0
M900AE	Extend	X			0
M900AR-VB	Retract		X		0
M900ARW	Retract	X		Χ	0
M900ARW-VB	Retract		X	Χ	0
M900ARW-S2	Retract	X		X	2-SPDT
M900AEW-S2	Extend	Χ		Χ	2-SPDT

^{1 -} VB-7xxx (1/2" to 2") and required AV-821, VB-8xxx (2-1/2" to 4") and required AV-822, and VB-9xxx (2-1/2" to 3") and required AV-822.*
2 - For Direct VB-7xxx Mounting (No Linkage Required)
* Sold separately.

Dimensions



Dimensions for M900AR-VB and M900ARW-VB.

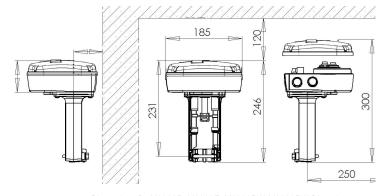

Dimensions for M900AR, M900AE, M900ARW, M900ARW-S2 and M900AEW-S2

Globe Valves and Actuators

MK-6811/6911 SR Pneumatic Actuators

MK-6811, MK-691	1 Actuator Specifications
Inputs	
Control signal	5 to 10 psig (34 to 69 kPa). Positive Positioner start point adjustable 1 to 12 psi (7 to 83 kPa). Positive Positioner span adjustable 2 to 13 psi (14 to 89 kPa)
Supply pressure	15 to 20 psig (103 to 137 kPa) nominal 30 psig (205 kPa) maximum
Air connections	1/8 in FNPT
Effective area	50 sq. in. (323 cm²)
Outputs	
MK-6811	1" (25 mm) Nominal stroke
MK-6911	1¾" (45 mm) Nominal stroke
Environment	
Temperature limits	Shipping / storage: -40 to 220°F (-40 to 104°C) ambient. Operating: -20°F to 220°F (-29°C to 104°C). Maximum allowable ambient: 220°F (104°C) at maximum valve Fluid temperature of 281°F (138°C). Minimum allowable valve Fluid temperature: 20°F (-7°C).
Positive Positioner	AK-42309-500 recommended for 5" valve, required for 6" valve, order separately. Supplied as standard on VK4 factory valve assemblies.



MK-6811



MK-6911

More information: Scan the QR code or visit the



Visit: http://goo.gl/6OaOs6

MK-88/8911 SR Pneumatic Actuators

Application

MK-8800 series actuators are used to control 21/2" to 4" VB-9000 series valves. MK-8900 series actuators are used to control 5" and 6" VB-9000 series valves.

MK-88/8900 Actuator \$	Specifications	
Effective Area	100 sq. in. (645 cm²)	
Construction	Housing: Die cast aluminum. Diaphragms: Replaceable beaded molded neoprene.	
Stroke	See table below.	
Spring	Retracts actuator shaft and raises valve stem on loss of air pressure.	
Nominal range	See table below.	
Starting point	Adjustable \pm 1 psi (7 kPa). Maximum air pressure: 30 psig (207 kPa).	
Ambient temperature limits	Shipping: -40 to 220°F (-40 to 104°C). Operating: -20 to 220°F (-29 to 104°C).	
Air connection	1/8" FNPT	
Valve stroke position indication	1/8" (3 mm) increments	
Mounting	In any upright position with actuator head above 45° of the center line of the valve body. Actuator head may be swiveled to any convenient position.	
Dimensions	See table below.	
Optional accessories		
Linkage	AV-496	
AK-52309-500	Positive Positioner with linkage	
Tool-95	Pneumatic calibration tool kit	



with 3-Way Valve Assembly

Specifications

Don't would be	Nominal spring rangea		Nominal stroke		Dimensions		For use with	
Part number	psig	kPa	in.	mm	in.	mm	valve bodies	
MK-8811	5.40		1	25.4	11¾ high x 10½ wide x 10½ deep	298 high x 267 wide x 267 deep	VB-9313 2½ – 4"	
MK-8911		34-69	2	50.8	12¾ high x 10½ wide x 10½ deep	324 high x 267 wide x 267 deep	VB-9313 5 & 6"	

a - Nominal (no load) spring ranges are based on maximum 1" (25.4 mm) or 2" (50.8 mm) stroke.

Pneumatic Positive Positioning Relay for VB-7/8/9xxx

Positive Positioning Relay

Positive Positioner Pneumatic Relay is used to accurately position an actuator stroke with respect to signal pressure from the controller. It can also be used to change the effective spring range of an actuator and increase the capacity of a controller.

Features

For accurate positioning of valve and damper actuators, this positioner utilizes a pilot-operated, relay-type position-sensing mechanism, much more sensitive to actuator position changes than some competitive "force-balance" positioners.

Model Number	Description
AK-42309-500	Positive Positioning Relay with Mounting Linkage.

Note: This model cannot be used with M556, M572, M573, M574, and MK-12000 Series actuators. Use N800-0555 positioner with M556, M573, and M574.

Specifications

Specifications	
Action	Direct (increase in output pressure to actuator with an increase in pilot pressure from controller)
Pilot input	0 to main air pressure, psig.
Output	0 to main air pressure, psig.
Construction	
Housing	Polysulfone
Diaphragm	Neoprene
Start point	Adjustable 1 to 12 psig (7 to 83 kPa).
Span	Adjustable 2 to 13 psi (14 to 90 kPa); factory set: 5 psig
Stroke	Adjustable 2 to 13 psi (14 to 90 kPa); factory set: 5 psig with feedback spring for 7/16 to 5" stroke
Supply air pressure	Clean, oil free, dry air required (refer to EN-123)
Maximum	30 psig (207 kPa)
Nominal supply	15 to 20 psig (103 to 138 kPa)
Environment	
Ambient temperature limits	Shipping: -40 to 160°F (-40 to 71°C). Operating: 32 to 140°F (0 to 60°C)
Humidity	5 to 95% R.H., non-condensing
Locations	NEMA Type 1 (IP10)
Air connections	
"M" and "B"	Barbed for 1/4" O.D. plastic tubing
"P"	Dual-contoured for 1/4" O.D. and 5/32" O.D. tubing
Air consumption (air compressor sizing)	19 scim(5.2 mL/s) at 20 psig (138 kPa) supply
Air capacity for sizing air mains	20 scim (5.5 mL/s)
Flow capacity	860 scim (235 mL/s) at 20 psig (138 kPa) supply
Mounting linkage	All necessary linkage provided to assemble AK-42309-500 to the following actuator series; MK-6600, MK-6800, MK-6900, MK-8800 and MK-8900
Dimensions	2½ H x 4½ W x 3 D" (64 x 114 x 76 mm)



More information: Scan the QR code or visit the link below.



Visit: http://goo.gl/LJCLEb

Rack & Pinion Linkages AV-607/609-1

Application

The AV-607-1 and AV-609-1 linkages are designed to link single or dual Schneider Electric SmartX spring return and non-spring return actuators to 1½" to 6" VB-9313 and 2½" to 6" VB-8xx3 globe valves.

Features

- Allows mounting of single or dual actuators Schneider Electric SmartX actuators
- AV-607-1 is compatible with Schneider Electric (e.g., Siebe, Barber-Colman, INVENSYS) 2½" to 5" VB-8xx3, 2½" to 4" VB-9313 and discontinued 2" to 4" VB-9xxx valves and Schneider Electric SmartX actuators2
- AV-609-1 is compatible with Schneider Electric (e.g., Siebe, Barber-Colman, INVENSYS) 6" VB-8xx3, 5" to 6" VB-9313 and 5" and 6" VB-92xx valves and Schneider Electric SmartX actuators 2
- Maintenance-free construction
- Corrosion protected heavy-duty steel rack-and-pinion construction and metal housing
- Precision rack self aligns with the valve stem
- 2 Check the appropriate valve selection guide for close-offs for your application. AV-607-1 and AV-609-1 replace AV-607 and AV-609 respectively

Applicable Literature

- EN-205 Water System Guidelines, F-26080
- AV-608 Linkage Adapter Kit installation instructions, F-27253
- AV-607-1, 609-1 SmartX Actuator Linkages for 2½" to 6" Globe Valves
- MA40-704x, MA4x-707x, MA4x-715x SmartX Series Spring Return Two-position Actuators Installation Instructions, F-26642
- MA40-717x SmartX Series Spring Return Two-position Actuators Installation Instructions, F-26742
- MF4x-7xx3 SmartX Series Spring Return Floating Actuator Installation Instructions, F-26644
- MF40-7173 SmartX Series Spring Return Floating Actuator installation instructions, F-26749
- MF41-6153,/MS41-6153 Series Non-Spring Return Rotary Electronic Damper Actuator Installation Instructions, F-27215
- MS4x-7xx3 SmartX Series Spring Return Proportional Actuator Installation Instructions, F-26645
- MS40-717x SmartX Series Spring Return Proportional Actuator Installation Instructions, F-26748
- Vx-7000 Series and Vx-9000 Series Mx4x-6xxx and Mx4x-7000 Series Linked Globe Valve Assemblies with SmartX Actuators Selection Guide, F-26752
- VB-8xx3 Series Balanced Plug Valve Selection Guide, F-27199

Note: Do not install a 300 lb-in Mx41-634-x actuator on the AV-607-1 linkage as equipment damage may occur.

inkage Kits and Actuator	/Linkage Assemblies	
Application	Actuator	Linkage Kita
2½" to 5" 2-Way and 3-Way	MK-6811 ^b	AV-497 (VB-8000 only) AV-495 (VB-9313 up to 4" only)
6" 2-Way and 3-Way	MK-6911 ^b	AV-497 (VB-8000 only)
2½" to 4" 3-Way	MK-8811	AV-496 (VB-9313 only)
5" to 6" 3-Way	MK-8911	AV-496 (VB-9313 only)
2½" to 5" 2-Way and 3-Way (1" Nominal stroke)	MA41-7150,51,53, MA40-7170,71,73, MF41-6343a, MF41-7153, MF40-7173,	AV-607-1°
6" 2-Way and 3-Way (1¾" Nominal stroke)	MS41-6340a ,MS41-6343a ,MS41-7153 , MS40-7170,71,73	AV-609-1 ^d
2½" to 6" 2-Way and 3-Way (1" Nominal stroke)	M1500A	AV-822



b - AK-42309-500 (order separately) optional for 2½" to 5" valve, required for 6" valve. VK4 valve assemblies include Positive Positioner.

c - $2\frac{1}{2}$ " to 5" VB-8000 valves or $2\frac{1}{2}$ " to 4" VB-9313 valves.

d - 6" VB-8000 valves or 5" to 6" VB-9313 valves



AV-607-1



AV-609-1



Pressure Independent Balancing and Control Valves and Actuators

Description and Features

The **SpaceLogic** PIBCV range is a comprehensive selection of automatic balancing and control valves that provide flow limitation, with full control authority over hydronic regulation.

Automatic balancing within PIBCV valves provide stable flow regulation regardless of pressure fluctuations in the system and all valves have an adjustable flow limitation set point. The control valve portion of the PIBCV further regulates the water/glycol flow from close-off up to the maximum flow limit setting.

Typical applications are temperature control of chillers, air-handling units, heat exchanges and terminal units such as fan coils, induction units and radiant panels.



Features

- Reduced Energy Consumption
 - Pressure independence ensures no overflow of water/glycol through the valve. Limiting water/glycol flow to the design load of the coil has a significant effect on energy efficiency since systems operate for the majority of the time on a partial load.
 - The overflow of water/glycol causes a degradation in heat transfer at the heat exchanger.
 - Uncontrolled overflow of water/glycol beyond the design flow of the heat exchanger is an
 extremely wasteful and inefficient use of heat.
 - The correct and maximum design flow ensures a high differential in supply and return temperatures to provide high operational efficiency of the chiller or boiler.
- Improved Comfort
 - The SpaceLogic PIBCV valves are not affected by other valves in the system that may be
 opening and closing throughout the day or other piping system disturbances providing more
 constant, comfortable, room temperatures.
- · Reduced Pumping Costs
 - A reduction in overflows through the network reduces pumping costs. A smaller pump head and equipment is required compared to traditional configurations.
- Reduced Installation Costs
 - Only one valve needs to be installed rather than two or three since the SpaceLogic PIBCV covers
 the pressure balancing, flow limitation and control modulation.
- Easy and Quick Commissioning
 - SpaceLogic PIBCV setup time is significantly reduced with a simple and accurate flow setting
 procedure without the need for flow charts, calculations or measuring equipment.
- Improved Reliability
 - Improved mechanical equipment reliability from reduced actuator movements.









actuators are







Summary and Applications


Summary

SpaceLogic PIBCV valves and actuators can be used with actuators for pressure independent balancing and control applications or without actuators for automatic flow limiting balance applications. PIBCVs immediately react to all changes in system pressures, providing stable valve control independent from the fluctuating pressures in the piping system. No valve authority, pressure calculations or complicated valve flow setting calculations are required. At partial system load there is no resulting overflow because the valve always limits the flow corresponding to the design flow of the coil.

SpaceLogic PIBCV valves with actuators include an integrated control valve with flow regulation for HVAC applications, plus an automatic flow limiting function for energy efficiency. A full range of Schneider Electric actuators are available for every control application including two position, proportional, floating, spring return open, spring return close, and non-spring return.

Variable flow systems: A SpaceLogic PIBCV with a Schneider Electric actuator is used as a control valve for terminal units, like an AHU (Air Handling Unit), FCU (Fan Coil Unit) or radiation panel, and controls the required flow on every terminal unit maintaining hydronic balance in the system.

Constant flow systems: There are numerous applications in which SpaceLogic PIBCV can be used. In a constant flow system with FCUs or in a one pipe heating system, SpaceLogic PIBCVs can be installed as an automatic balancing valve in every riser. SpaceLogic PIBCVs limit the flow to the set value, thus automatically achieving hydronic balance. Whenever an automatic flow limiter or a control valve is needed, the advantages of cost-saving properties are inherent with SpaceLogic PIBCVs. This includes systems with (floor) heating/cooling, concrete core activation or radiation panels.

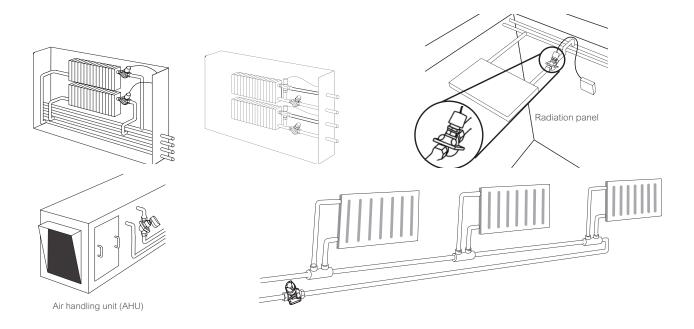

Pressure Independent Balancing and Control Valves and Actuators

Theory and Implementation

Theory

The SpaceLogic PIBCV valve consists of two parts:

- 1. Differential Pressure Controller
- 2. Control Valve

1. Differential Pressure Controller (PC)

The differential pressure controller maintains a constant differential pressure across the control valve. The pressure difference is balanced so that when the differential pressure across the control valve changes (due to a change in available pressure, or movement of the control valve) the pressure regulator automatically aligns to a new position. This brings a new equilibrium and therefore keeps the differential pressure at a constant level.

2. Control Valve (CV)

The control valve has a linear characteristic. It features a stroke limitation that allows adjustment of the value. The maximum flow allowed by the control valve can be adjustable to a percentage of the valve's maximum flow rate.

Control Performance

SpaceLogic PIBCV actuators can be used to change the flow response from linear to logarithmic (equal percentage). This makes the **SpaceLogic** PIBCV suitable for all applications, including AHUs, where the equal percentage characteristic is needed to get a stable control loop. The actuators can be switched from linear to equal percentage by changing a dipswitch setting.

Easy Implementation


- No Cv or authority calculations needed. Flow is the only parameter to be considered when designing.
- Compact design, essential when only limited space is available such as in fan-coil units.
- · Easy commissioning and troubleshooting. No specialized staff or measuring equipment needed.
- Trouble-free segmentation of the building project. SpaceLogic PIBCVs will automatically control the flow, even when sections of the
 installation are unfinished. There is no requirement to re-adjust the SpaceLogic PIBCV flow setting after finalization of the building
 project.


Flow Direction

A **SpaceLogic** PIBCV valve is mono-directional, meaning the valve operates when the arrow on the valve body is aligned with the flow direction. When this rule is ignored, the valve acts as a variable orifice that causes water/glycol hammer at sudden closing when available pressure has increased, or the valve has been set to a lower value.


In the case when a system condition allows backflows, it is strongly recommended to use a backflow preventer in order to avoid possible water/glycol hammer that can damage the valve as well as other elements in the system.

It is recommended to fit a strainer upstream of the valve to increase reliability and to follow water/glycol treatment guidelines as detailed in VDI 2035. The pipework system should be flushed prior to the operation.





Valve assembly part number system

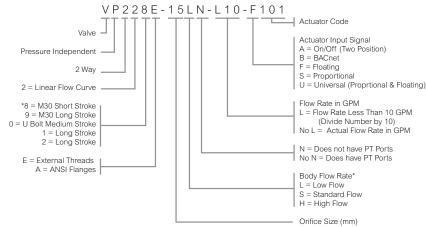

 * Determined by valve size and flow; see tables 23 & 24



Pressure Independent Balancing and Control Valves and Actuators

Methods of Selection

SpaceLogic PIBCV selection options

There are three methods for selecting **SpaceLogic** PIBCV Valves and Actuators:

- 1: Complete method: valve assembly selection.
- 2. Custom method: valve body and actuator field assembly.
- 3. Valve only method: automatic flow limited balance.

1: Complete method: valve assembly selection

To select a PIBCV valve assembly select the required flow rate and actuator type. For example, to select a PIBCV valve assembly with a flow rate of 1.5 GPM and a nonspring return proportional actuator refer to "Table 1. Valve Assemblies ½ to 1¼" with Female NPT End Connectors, without PT Ports" on page 182.

Select the 1.5 GPM flow rate with the left column of the table

Select the actuator from the top row of the table.

The intersecting valve assembly part number from the left column and top row selections shows VP228E-15SN-L15-S101 which includes the set 1.5 GPM flow rate, installed actuator, female NPT end connectors, and metal tag with flow rate.

Specifications for the selected valve body actuators are in "Table 3. Specification ½ to 1½" Valve Body Actuators" on page 183 and for the valve body in "Table 12. Specification Threaded Version, ½ to 2"" on page 187.

Custom method: valve body and actuator field assembly Select the individual parts then set the flow rate and field assemble a valve assembly.

"Table 12. Specification Threaded Version, ½ to 2"" on page 187 shows the valve body specifications and "Table 23. ½ to 2" Valve Flow Ranges (Qmin to Qnom)" on page 194, and "Table 24. ½" to 10" Flanged Valve Flow Ranges (Qmin to Qnom)" on page 195, show the valve body flow rate ranges.

For example, to select a valve body that can be used in the flow rate range of 1 to 2 GPM, from "Table 17. Selection: ½" to 2" Valve Body Tail Pieces" on page 190, select the VP-228E-15BQSNT valve body that does not include PT ports, or select the VP-228E-15BSQ valve body if PT ports are required.

Other larger valves could also provide the 1 to 2 GPM flow rates, but the VP-228E-15BQSNT was selected because it will be using a higher percentage of its flow range (in general, best accuracy is achieved when a higher percentage of flow rate is used).

The ½" to 2" PIBCV valves use convenient valve body tail pieces for connection to the piping system.

From "Table 17. Selection: ½" to 2" Valve Body Tail Pieces" on page 190, select the desired ½" tail piece – part number 9112108015 for Female NPT, 9112110015 for Male NPT, or 9112109015 for Sweat. Each tail piece part number includes two tail pieces.

"Table 3. Specification $\frac{1}{2}$ to $\frac{1}{4}$ " Valve Body Actuators" on page 183 shows the compatible actuators.

Select the MP131-24T for two-position control, the MP131-24F for floating control, the MP-131-24MP for proportional control, the MP300-SRU for spring return open universal control, or the MP300-SRD for spring return close universal control. Universal control actuators provide both proportional and floating input functionality. The valve body flow can easily be set before the actuator is installed as shown in "PIBCV Flow Setting" on page 181.

3. Valve Body Only: Automatic Flow Limited Balance Example

PIBCV valves can be used without actuators to limit the circuit flow to an adjustable flow rate.

"Table 12. Specification Threaded Version, ½ to 2" on page 187 shows the valve body specifications and "Table 17. Selection: ½" to 2" Valve Body Tail Pieces" on page 190 and "Table 24. 2½" to 10" Flanged Valve Flow Ranges (Qmin to Qnom)" on page 195 show the valve body flow rate ranges.

For example, to select a valve body that can be used in the flow rate range of 2 to 5 GPM from Table 23 select the VP229E-15BQHNT Valve body part number. The ½" to 2" PIBCV valves use convenient valve body tail pieces for connection to the piping system.

From "Table 17. Selection: ½" to 2" Valve Body Tail Pieces" on page 190, select the desired ½" tail piece: part number 9112108015 for Female NPT, 9112110015 for Male NPT, or 9112109015 for Sweat. Each tail piece part number includes two tail pieces.

The 1½" and larger sized valves require a stem lock when used without an actuator as shown in "Table 11. Application: Operation of PIBCV Valve Body Without Actuator" on page 186 (which also shows application information for the valve bodies without actuators). The valve body flow can easily be set as shown in the PIBCV Flow Setting section.



PIBCV Flow Setting

1/2...11/4" Size Valves

The calculated flow can be adjusted easily without using special tools. To change the presetting (factory setting is 100% for separately purchased PIBCV valve bodies) follow the four steps below:


- Remove the black protective cover or the mounted actuator.
- 2 Raise the green pointer.
- 3 Turn (clock wise to decrease) to the new presetting.
- Press the pointer back into the lock position. After the pointer is clicked back into place the presetting is locked.

The presetting scale indicates values from 100% flow to 20%. Clock wise turning would decrease the flow value while counter clock wise would increase it.


Example: VP229E-15HN


With this $\frac{1}{2}$ " valve the nom flow = 5 gal/min = 100% presetting. To set a flow of 4 gal/min you have to set: $\frac{4}{5} = 80\%$. Schneider Electric recommends a presetting/flow from 20% to 100%.

To set a PIBCV valve to a Q_{high} setting above 100%, turn the green pointer counter clock wise from 100%. The Q_{high} setting is the scale setting plus 90%. For example, to set the VP229E-15HN to a flow rate of 5.5 gal/min, set 5.5/5.0 = 110% setting. Obtain the 110% setting by turning the green pointer counter clock wise from 100% to 20% (20% and 90% = 110%). As shown on page 187, Q_{high} settings above 100% slightly increase the valve's required minimum differential pressure.

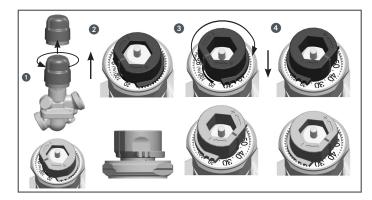



PIBCV Flow Setting 5"...10"





PIBCV Flow Setting 11/2"...4"





PIBCV Assemblies: ½" to 1¼" Female NPT, without PT Ports

Valve Assembly and Suitable Actuators

Table 1. Valve Ass						
		24 Vac Two-position with Auxiliary switch (MP131-24T)	24 Vac Three Wire Floating with Auxiliary switch (MP131-24F)	24 Vac Proportional with Position Output Signal (MP131-24MP)	24 Vac Proportional/Floating with Position Output Signal Spring Return Open (MP300-SRU)	24 Vac Proportional/Floating with Position Output Spring Return Closed (MP300-SRD
Flow rate (GPM)a	Valve size (inch)					
0.5	1/2	VP228E-10LN-L05-A101	VP228E-10LN-L05-F101	VP228E-10LN-L05-S101	VP228E-10LN-L05-U201	VP228E-10LN-L05-U301
1.0	1/2	VP228E-15LN-L10-A101	VP228E-15LN-L10-F101	VP228E-15LN-L10-S101	VP228E-15LN-L10-U201	VP228E-15LN-L10-U301
1.5	1/2	VP228E-15SN-L15-A101	VP228E-15SN-L15-F101	VP228E-15SN-L15-S101	VP228E-15SN-L15-U201	VP228E-15SN-L15-U301
2.0	1/2	VP228E-15SN-L20-A101	VP228E-15SN-L20-F101	VP228E-15SN-L20-S101	VP228E-15SN-L20-U201	VP228E-15SN-L20-U301
2.5	1/2	VP229E-15HN-L25-A101	VP229E-15HN-L25-F101	VP229E-15HN-L25-S101	VP229E-15HN-L25-U201	VP229E-15HN-L25-U301
3.0	1/2	VP229E-15HN-L30-A101	VP229E-15HN-L30-F101	VP229E-15HN-L30-S101	VP229E-15HN-L30-U201	VP229E-15HN-L30-U301
3.5	1/2	VP229E-15HN-L35-A101	VP229E-15HN-L35-F101	VP229E-15HN-L35-S101	VP229E-15HN-L35-U201	VP229E-15HN-L35-U301
4.0	1/2	VP229E-15HN-L40-A101	VP229E-15HN-L40-F101	VP229E-15HN-L40-S101	VP229E-15HN-L40-U201	VP229E-15HN-L40-U301
4.0	3/4	VP228E-20SN-L40-A101	VP228E-20SN-L40-F101	VP228E-20SN-L40-S101	VP228E-20SN-L40-U201	VP228E-20SN-L40-U301
4.5	1/2	VP229E-15HN-L45-A101	VP229E-15HN-L45-F101	VP229E-15HN-L45-S101	VP229E-15HN-L45-U201	VP229E-15HN-L45-U301
5.0	1/2	VP229E-15HN-L50-A101	VP229E-15HN-L50-F101	VP229E-15HN-L50-S101	VP229E-15HN-L50-U201	VP229E-15HN-L50-U301
5.5	3/4	VP229E-20HN-L55-A101	VP229E-20HN-L55-F101	VP229E-20HN-L55-S101	VP229E-20HN-L55-U201	VP229E-20HN-L55-U301
6.0	3/4	VP229E-20HN-L60-A101	VP229E-20HN-L60-F101	VP229E-20HN-L60-S101	VP229E-20HN-L60-U201	VP229E-20HN-L60-U301
6.5	3/4	VP229E-20HN-L65-A101	VP229E-20HN-L65-F101	VP229E-20HN-L65-S101	VP229E-20HN-L65-U201	VP229E-20HN-L65-U301
7.0	3/4	VP229E-20HN-L70-A101	VP229E-20HN-L70-F101	VP229E-20HN-L70-S101	VP229E-20HN-L70-U201	VP229E-20HN-L70-U301
7.5	3/4	VP229E-20HN-L75-A101	VP229E-20HN-L75-F101	VP229E-20HN-L75-S101	VP229E-20HN-L75-U201	VP229E-20HN-L75-U301
7.5	1	VP229E-25SN-L75-A101	VP229E-25SN-L75-F101	VP229E-25SN-L75-S101	VP229E-25SN-L75-U201	VP229E-25SN-L75-U301
3	1	VP229E-25HN-L80-A101	VP229E-25HN-L80-F101	VP229E-25HN-L80-S101	VP229E-25HN-L80-U201	VP229E-25HN-L80-U301
3.5	1	VP229E-25HN-L85-A101	VP229E-25HN-L85-F101	VP229E-25HN-L85-S101	VP229E-25HN-L85-U201	VP229E-25HN-L85-U301
9.0	1	VP229E-25HN-L90-A101	VP229E-25HN-L90-F101	VP229E-25HN-L90-S101	VP229E-25HN-L90-U201	VP229E-25HN-L90-U301
9.5	1	VP229E-25HN-L95-A101	VP229E-25HN-L95-F101	VP229E-25HN-L95-S101	VP229E-25HN-L95-U201	VP229E-25HN-L95-U301
10	1	VP229E-25HN-010-A101	VP229E-25HN-010-F101	VP229E-25HN-010-S101	VP229E-25HN-010-U201	VP229E-25HN-010-U301
11	1	VP229E-25HN-011-A101	VP229E-25HN-011-F101	VP229E-25HN-011-S101	VP229E-25HN-011-U201	VP229E-25HN-011-U301
12	1	VP229E-25HN-012-A101	VP229E-25HN-012-F101	VP229E-25HN-012-S101	VP229E-25HN-012-U201	VP229E-25HN-012-U301
13	11/4	VP229E-32SN-013-A101	VP229E-32SN-013-F101	VP229E-32SN-013-S101	VP229E-32SN-013-U201	VP229E-32SN-013-U301
14	11/4	VP229E-32SN-014-A101	VP229E-32SN-014-F101	VP229E-32SN-014-S101	VP229E-32SN-014-U201	VP229E-32SN-014-U301
15	11/4	VP229E-32HN-015-A101	VP229E-32HN-015-F101	VP229E-32HN-015-S101	VP229E-32HN-015-U201	VP229E-32HN-015-U301
		VP229E-32HN-016-A101	VP229E-32HN-016-F101	VP229E-32HN-016-S101	VP229E-32HN-016-U201	VP229E-32HN-016-U301

a. Factory set. Complete flow ranges shown in tables for 1/2 to 2" on page 187.

VP229E-32HN-017-A101



VP229E-32HN-017-F101

VP229E-32HN-017-S101

VP229E-32HN-017-U201

VP229E-32HN-017-U301

PIBCV Assemblies: ½" to 1¼" Female NPT, with PT Ports

Table 2.	Valve As	ssemblies ½	to 1¼" with Female NPT	End Connectors, with PT P	orts						
Flow Rate (GPM)	Valve size (inch)		Two-position with switch (MP131-24T)	24 Vac Three Wire Floating with Auxiliary switch (MP131-24F)	24 Vac Proportional with Position Output Signal (MP131-24MP)	24 Vac Proportional/Floating Spring Return Open (MP300-SRU)	24 Vac Proportional/Floating Spring Return Closed (MP300-SRD)				
0.5	1/2	VP228E-1	0L-L05-A101	VP228E-10L-L05-F101	VP228E-10L-L05-S101	VP228E-10L-L05-U201	VP228E-10L-L05-U301				
1.0	1/2	VP228E-1	5L-L10-A101	VP228E-15L-L10-F101	VP228E-15L-L10-S101	VP228E-15L-L10-U201	VP228E-15L-L10-U301				
1.5	1/2	VP228E-1	5S-L15-A101	VP228E-15S-L15-F101	VP228E-15S-L15-S101	VP228E-15S-L15-U201	VP228E-15S-L15-U301				
2.0	1/2	VP228E-1	5S-L20-A101	VP228E-15S-L20-F101	VP228E-15S-L20-S101	VP228E-15S-L20-U201	VP228E-15S-L20-U301				
4.0	3/4	VP228E-2	20S-L40-A101	VP228E-20S-L40-F101	VP228E-20S-L40-S101	VP228E-20S-L40-U201	VP228E-20S-L40-U301				
7.5	1	VP229E-2	25S-L75-A101	VP229E-25S-L75-F101	VP229E-25S-L75-S101 VP229E-25S-L75-U201		VP229E-25S-L75-U301				
14	11/4	VP229E-3	32S-014-A101	VP229E-32S-014-F101	VP229E-32S-014-S101	VP229E-32S-014-U201	VP229E-32S-014-U301				
1/2" to Actuato	Specific 1¼" Valv or Part N or code)	ve Body lumber	MP131-24T (A101)	MP131-24F (F101)	MP131-24MP (S101) Proportional, 0 to 10 VDC, 2 to 10 VDC, 4	MP300-SRU (U201)	MP300-SRD (U301)				
Input si	gnal		Two-position, 3 wire with selectable input jumper signal action selection	Three wire floating	to 20 mA, sequencing with selectable input signal action, DIP switch selectable	Proportional, 0 to 10 VDC, 2 to 1 with selectable input signal actic selectable					
Electric	al conne	ection	Screw terminal with co	onduit connector							
Position signal	n feedba	ick output	_	_	0 to 10 VDC	0 to 10 VDC, 2 to 10 VDC					
Spring	return		-	-	-	Open valve	Close valve				
Auxiliar	y switch	1	Yes	Yes	-	_	_				
Other fo	eatures		_	-	Weekly anti blocking se- lection, auto calibration, LED indication	Valve stroke length selection, LE	D indication				
Linear/c curve s (GPM	equal% election	valve flow Flow rate	_	-	Yes	Yes					
Actuato 60 Hz (r speed 50 Hz)	s/mm	20 (24)			11.7 (14)					
	consum	ption	1 VA		1.5 VA	9 VA					
Actuato	r weigh	t (lb.)	.9			2.0	1.3				
Operating temperature limits °F (°C)			32 to 131 (0 to 55)								

All actuators are 24 Vac. 50/60 HZ with removable conduit connector plate and wiring terminal block, manual override.



cULus according to UL 60730-1A/-2-14 and CAN/CSA E60730-1/-2-14 and CE according to EN 60730-1/-2-14 per EMC [2014/30/EU] and LVD [2014/35/EU]

F-27962

Regulatory compliance

Specification data sheet

F-27961

PIBCV Assemblies 11/2" to 4"

Table 4. Valve A	Assemblies	1½", 2" with Female NPT End Connectors, with PT Ports	•	
Flow rate (GPM)a	Valve size (inch)	24 Vac Proportional with Position Output Signal (MP500C)	24 Vac Proportional/Floating with Position Output Signal Spring Return Open (MP500C-SRU)	24 Vac Proportional/Floating with Position Output Spring Return Closed (MP500C-SRD)
18	1½	سيس VP220E-40S-018-U131	VP220E-40S-018-U231	VP220E-40S-018-U331
19	1½	VP220E-40S-019-U131	VP220E-40S-019-U231	VP220E-40S-019-U331
20	1½	VP220E-40S-020-U131	VP220E-40S-020-U231	VP220E-40S-020-U331
22	1½	VP220E-40S-022-U131	VP220E-40S-022-U231	VP220E-40S-022-U331
24	1½	VP220E-40S-024-U131	VP220E-40S-024-U231	VP220E-40S-024-U331
26	1½	VP220E-40S-026-U131	VP220E-40S-026-U231	VP220E-40S-026-U331
28	1½	VP220E-40S-028-U131	VP220E-40S-028-U231	VP220E-40S-028-U331
30	1½	VP220E-40S-030-U131	VP220E-40S-030-U231	VP220E-40S-030-U331
32	1½	VP220E-40S-032-U131	VP220E-40S-032-U231	VP220E-40S-032-U331
34	2	VP220E-50S-034-U131	VP220E-50S-034-U231	VP220E-50S-034-U331
36	2	VP220E-50S-036-U131	VP220E-50S-036-U231	VP220E-50S-036-U331
38	2	VP220E-50S-038-U131	VP220E-50S-038-U231	VP220E-50S-038-U331
40	2	VP220E-50S-040-U131	VP220E-50S-040-U231	VP220E-50S-040-U331
44	2	VP220E-50S-044-U131	VP220E-50S-044-U231	VP220E-50S-044-U331
48	2	VP220E-50S-048-U131	VP220E-50S-048-U231	VP220E-50S-048-U331
52	2	VP220E-50S-052-U131	VP220E-50S-052-U231	VP220E-50S-052-U331

a. Factory set

Table 5. Valve Assemblies $2\frac{1}{2}$ " to 4" with ANSI Standard B16.1 Flanges, with PT Ports

Flow rate (GPM)a	Valve size (inch)	24 Vac Proportional with Position Output Signal (MP500C)	24 Vac Proportional/Floating with Position Output Signal Spring Return Open (MP500C-SRU)	24 Vac Proportional/Floating with Position Output Signal Spring Return Closed (MP500C-SRD)
50	01/		Video A oso oso Nova	NECOSA OFO OFO LINOA
56	2½	VP220A-65S-056-U131	VP220A-65S-056-U231	VP220A-65S-056-U331
60	2½	VP220A-65S-060-U131	VP220A-65S-060-U231	VP220A-65S-060-U331
65	2½	VP220A-65S-065-U131	VP220A-65S-065-U231	VP220A-65S-065-U331
70	2½	VP220A-65S-070-U131	VP220A-65S-070-U231	VP220A-65S-070-U331
75	2½	VP220A-65S-075-U131	VP220A-65S-075-U231	VP220A-65S-075-U331
80	2½	VP220A-65S-080-U131	VP220A-65S-080-U231	VP220A-65S-080-U331
90	3	VP220A-80S-090-U131	VP220A-80S-090-U231	VP220A-80S-090-U331
100	3	VP220A-80S-100-U131	VP220A-80S-100-U231	VP220A-80S-100-U331
110 (min. 44)	2½	VP220A-65H-110-U131	VP220A-65H-110-U231	VP220A-65H-110-U331
165 (min. 66)	4	VP220A-100S-165-U131	VP220A-100S-165-U231	VP220A-100S-165-U331
176 (min. 70)	3	VP220A-80H-176-U131	VP220A-80H-176-U231	VP220A-80H-176-U331
260 (min. 104)	4	VP220A-100H-260-U131	VP220A-100H-260-U231	VP220A-100H-260-U331

a. Factory set



PIBCV Assemblies: 11/2" to 6" with PT Ports and Flanges

Table 6. Specification 1½" to 4" Valve Body Act	ruators							
1½" to 4" Valve Body Actuator part number (Actuator code)	MP500C (U131)	MP500C-SRD (U331)						
Input signal	Proportional, 0 to 10 VDC, 2 to 10 VDC, 4 to 20 mA, sequencing with selectable input signal action and Floating, DIP switch selectable							
Electrical connection	Screw terminal with conduit connector							
Position feedback output signal	2 to 10 VDC	2 to 10 \	VDC, 0 to 5 VDC					
Spring return	-	Open Valve	Close Valve					
Auxilary switch								
Other features	Auto calibration, field selectable floating input signal travel time, powered manual override	Auto calibration, field selectable floating input signal travel time						
Linear/equal% valve flow curve selection Flow rate (GPM)	Yes	Yes						
Actuator speed full stroke 60 Hz (50 Hz)	Proportional 15 (15) Floating 60 or 300 (60 or 300)	Proportional 15 (15) Floating 60 or 300 (60 or 300) Spring Return 13 (13)						
Power consumption	Running 15 VA, Transformer Sizing 50 VA	Running 30 VA,	Transformer Sizing 50 VA					
Operating temperature limits °F (°C)		14 to 122 (-10 to 50)						
Actuator weight (lb.)	4.0		6.0					
Regulatory compliance	Underwriters Laboratory (E9429) compliance as Temperature Indicating & Regulatory Equipment cULus LISTED per UL873 and Canadian Standard C22.2 No. 24. European Community compliance per EMC directive (2014/30/EU) and LVD directive (2014/35/EU). Australian/New Zealand community RCM mark.							
Specification data sheet	F-27944		F-27945					
Installation data sheet	F-27942		F-27943					

Table 7. Valve Assemblies 5" and 6" With PT Ports with ANSI Standard B16.1 Flanges

24 Vac Proportional with Position Output Signal 24 Vac Proportional/Floating with Position Output 24 Vac Proportional/Floating with Position Signal Spring Return Open (MP2000-SRU) Output Spring Return Closed (MP2000-SRD) (MP2000-NSR) Flow rate (GPM) a 395 (min. 158) 5 VP220A-125S-395-U161 VP220A-125S-395-U261 VP220A-125S-395-U361 485 (min. 194) 5 VP220A-125H-485-U161 VP220A-125H-485-U261 VP220A-125H-485-U361 640 (min. 256) 6 VP220A-150S-640-U161 VP220A-150S-640-U261 VP220A-150S-640-U361 VP220A-150H-830-U161 830 (min. 332) 6 VP220A-150H-830-U261 VP220A-150H-830-U361

Table 8. Specification 5"and 6" Valve Body Actuators

5" and 6" Valve Body Actuator part number (Actuator code)	MP2000-NSR (U161)	MP2000-SRU (U261)	MP2000-SRD (U361)						
Input signal	Proportional, 0 to 10 VDC, 2 to 10 VDC, 0 to 20 mA, 4 to 20 mA, with selectable input signal action and Floating, DIP swtich selectable								
Electrical connection	Screw terminal with conduit connector								
Position feedback output signal	0 to 10 VDC, 2 to 10 VDC, 0 to 20 mA, 4 to 20 mA a								
Spring return	_	Open Valve	Close Valve						
Auxilary switch		Yes							
Other features	Auto calibration, 3-color LED indication, powered manual override, configurable position output signals, selectable adjustable equal percentage flow curve								
Linear/equal% valve flow curve selection Flow rate (GPM		Yes							
Actuator speed s/mm 60 Hz (50 Hz)	3 or 6 (3 or 6)		4 or 6 (4 or 6)						
Power consumption	15.0 VA								
Operating temperature limits °F (°C)		32 to 131 (0 to 55)							
Actuator weight (lb.)	13.8		18.96						
Regulatory compliance	cULus according to UL 60730-1A/-2-14 and [20	CAN/CSA E60730-1/-2-14 and C 14/30/EU] and LVD [2014/35/EU]							
Specification data sheet	F-27976		F-27969						
Installation data sheet	F-27956								

a. When used with a proportional input signal. All actuators are 24 Vac. 50/60 HZ with conduit connector holes and wiring terminal block, manual override.




PIBCV Assemblies: 8" and 10" with PT Ports and Flanges

Table 9. Valve Assembly 8" and 10" With PT Ports

Flow rate (GPM)	* Valve size (inch)	24 Vac Proportional with Position Output Signal (MP4000)
880 (min. 352)	8	VP222A-200S-880-U181
1188 (min. 475)	8	VP222A-200H-1188-U181
1320 (min. 528)	10	VP222A-250S-1320-U181
1630 (min. 652)	10	VP222A-250H-1630-U181

^{*} Factory set.



pecification		

8" and 10" Valve Body Actuator part number (Actuator code)	MP4000 (U181)						
Input signal	Proportional, 0 to 10 VDC, 2 to 10 VDC, 0 to 20 mA, 4 to 20 mA, with selectable input signal action and Floating, DIP swtich selectable						
Electrical connection	Screw terminal with conduit connector						
Position feedback output signal	0 to 10 VDC, 2 to 10 VDC, 0 to 20 mA, 4 to 20 mA a						
Spring return	-						
Auxilary switch	Yes						
Other features	Auto calibration, LED indication, powered manual override, adjustable speed						
Linear/equal% valve flow curve selection Flow rate (GPM)	Yes						
Actuator speed s/mm 60Hz (50 Hz)	3 or 6 (3 or 6)						
Power consumption	15 VA						
Operating temperature limits °F (°C)	32 to 131 (0 to 55)						
Actuator weight (lb.)	16.53						
Regulatory compliance	cULus according to UL 60730-1A/-2-14 and CAN/CSA E60730-1/-2-14 and CE according to EN 60730-1/-2-14 per EMC [2014/30/EU] and LVD [2014/35/EU]						
Specification data sheet	F-27971						
Installation data sheet	F-27958						

a. When used with a proportional input signal.

Table 11. Application: Operation of PIBCV Valve Body Without Actuator Operation of the PIBCV valve body without an actuator for an automatic flow limiting balancing application.

PIBCV valve size	Valve body series	Valve Stem Lock part number	Recommended installation and valve shut off capability				
1/2" to 1-1/4"	VP228E-xxxxxxx, VP229E-xxxxxxx	Use black cap provided with VP228E- xxxxxxx or VP229E-xxxxxxx valve body	Install valve in the supply water pipe for best shut off valve performance. To shutoff the valve, tighten black cap (max. Clos off pressure is 14.5 psi). To shut off against a higher differentia pressure set the valve flow to 0%.				
1-1/2", 2"	VP220E-xxxx	9114070000 (not included with valve	Install valve in either the supply or return water pipe. To shut of valve tighten bottom knob (max. Close off pressure is 232 psi)				
2-1/2" to 4"	VP220A-xxxxx	body)	Install valve in either the supply or return water pipe. To shut off valve tighten bottom insert with a 8 mm allen wrench (max. Close off pressure is 232 psi).				
5" to 6"	VP221A-xxxxxx	9114071000 (not included with valve body)	No shut off knob, set the valve to a 0% flow setting to shut off flow				
8" to 10"	VP222A-xxxxx	9114072000 (not included with valve body)					

The 9114070000, 9114071000, and 9114072000 Valve Stem Locks are secured to the valve body with a 10 mm allen wrench.

All actuators are 24 Vac. 50/60 HZ with conduit connector holes and wiring terminal block, manual override.

PIBCV Specifications: Threaded ½ to 2"

echnical data

Table 12. Specification Threaded Version, $1\!\!/_{\!2}$ to 2"

Valve size Valve assembly part number without					1/2"		3/4	1"		1"		11/4"	11/2"	2"
Valve ass		mber without	VP228E -10LN-	VP228E -15LN-	VP228E -15SN-	VP229E -15HN-	VP228E -20SN-	VP229E -20HN-	VP229E -25SN-	VP229E -25HN-	VP229E -32SN-	VP229E -32HN-	-	-
Valve ass	embly part nu	mber with	VP228E -10L-	VP228E -15L-	VP228E -15S-	-	VP228E -20S-	-	VP229E -25S-	-	VP229E- 32S-	-	VP220E- 40S-	VP220E- 50S-
1 11 0110	Q _{min}		.13	.24	.4	1	.8	1.5	1.5	2.4	2.82	3.5	13.2	22
Flow	Q _{nom} (100%)2)	gal/min	.66	1.2	2	5	4	7.5	7.5	12	14.1	17.5	33	55
Q _{high}			.79	1.45	2.4	5.5	4.75	8.25	8.2	13.2	15.5	19.25	33	55
Setting ra	nge 3)	%	20-120%			20-110%	20-120%	20-110%		-1			40-100%	
Diff. pressure 4), 5)	ΔpQ _{nom} (ΔpQhigh)	psi [kPa]	2.32-58 (2.61-58) [16-400 (18-400)]			5-58 (5.8-58) [35-400 (40-400)]	2.32-58 (2.61- 58) [16-400 (18-400)]	5-58 (5.8-58) [35-400 (40-400)]	2.9-58 (3.63-58) [20-400 (25-400)]	5-58 (5.8-58) [35-400 (40-400)]	2.9-58 (3.63-58) [20-400 (25-400)]	5-58 (5.8-58) [35-400 (40-400)]	4.35-58 [30-400]	
Stroke Q _n	om	in. (mm)	0.09 (2.25	5)		.157 (4)	0.09 (2.25)	.157 (4)	.177 (4.5)				.39 (10)	
Connectio	n .	ext. thread (ISO 228/1)	G 1/2 A	G ¾ A			G1A		G 1¼ A		G 1½ A		G2A	G 2½ A
Connectio	лі 	actuators	MP131-24	MP500C, MP500C-SRU/SRD										
Body pres	ssure rating	psi	EN 12516	-2:2004, 25	0 psi, PN 1	6								
Leakage a	acc. to standar	d IEC 60534	Class 4, r	Class 4, max. 0.01% of Q _{nom} max. 0.05% of Q _{nom}										
Max. close off differential pressure across the valve			232 psi (1	232 psi (16 bar)										
Control range			Acc. to st	andard IEC	60534 con	itrol range is h	igh as flow charac	teristic is linea	ar (1:1000)					
Control va	alve's characte	eristic	Stem up open, Linear (can be converted by actuator to equal percentage)											
For shut o	off function		Acc. to ISO 5208 class A - no visible leakage											
Flow med	ium		Water and water mixture for closed heating and cooling systems according to plant type I for DIN EN 14868. When used in plant Type II for DIN EN 14868 appropriate protective measures are taken. The requirements of VDI 2035, part 1 + 2 are observed.											
Medium temperatu	ire	°F (°C)	(water/gly	rcol) 15 to 2	50 (-10 - +									
			1			Mat	erials in the wat	ter/glycol						
	Valve bodie	es .		Dezincification Resistant Brass (CuZn36Pb2As - CW 602N) per EN 12420 EN-GJL-25 25) per EN										
	Cone (Pc))		Wrought cop CuZn40Pb3- Stainless Steel, W.Nr 1.4305 Stainless Steel 1.4305										
	Seat (Pc)		EPDM											ess Steel, 1.4305
	Seat (Cv)					Dezincifica	ation Resistant Br			602N)				ss Steel, 1.4305
Membranes and O-rings							01.1.1		PDM	1 4 4040				
	Springs								lr. 1.4568, W.N					
	Cone (Cv)	1					vvroug		uZn40Pb3 - (s Steel (A2)	JVV 0 141V				
	Flat gaske	t							NBR					
(only fo	Sealing age or valves with	ent							crylate Ester					
						Mater	ials out of the w	/ater/glycol						
	Plastic par	ts						PA					Р	OM
Incort	nauta and acc			0.75-20Dd0 OM644M1										

Note: Water/glycol compatibility: It is the responsibility of the installer or product specifier to verify water/glycol compatibility of the valves construction materials with the supplier of water/glycol treatment/heat transfer solution.

CuZn39Pd3 - CW614N

- 1) See "Table 15. Assembly Valve Body Configurations" on page 189 for a listing of all PIBCV Valve body part numbers.
- 2) Factory setting of the valve is done at Q_{nom} (100%) or lower depending on flow rate ordered.
- Regardless of the setting, the valve can modulate below 1% of set flow.
- 4) Δp = (P1-P3) min~max

Insert parts and outer screws

- 87 psi Δp is possible if consideration has been made to the flow velocity, cavitation and noise. For application usage, please speak with Product Support.
 - Cv Control valve



PIBCV Specifications: 21/2" to 10" Flange Version

Table 13. S	Spec	fication Flange	Version,	2½" to 4"															
		Valve size			2½")"		4"							
		Part Number		VP220/			0A-65H	VP:	220A-80S	VP220A-80F	l VP22	0A-100S	VP2	20A-100H					
Flow range		Q _{min}	gal/m	in 34		-	10		120	70 176		165		104 260					
		nom (100%) 1) range 2)	%	00)	1	10		40-10			100		200					
Diff. pres	s-	ΔpQ _{nom}	psi [kl	Pa] 4.35-58 [30-4001	8 7-58 ((60-400)	4 35-	58 (30-400)	8.7-58 (60-40	0) 4 35-5	8 (30-400)	8 7-5	8 (60-400					
sure 3), 4	4)	ДРФ _{пот}	poi [Ki	aj 4.55-50 [30-400]		` /					, , ,							
В	Body	pressure rating	psi		Class 125 per ASME B16.1-2010 Material Class B per ASTM A 126-04 (2014), 200 psi to 150°F, 190 psi to 200°F, 180 psi to 225°F, 175 psi to 250°F														
Cor	ntrol	valve's characte	ristic		Stem up open, Linear (can be converted by actuator to equal percentage)														
	_	c. to standard IE							Max. 0.05%	% of Q _{nom}									
		close off differen are across the va			232 psi (16 bar)														
Pi		shut off function			Acc. to ISO 5208 class A - no visible leakage														
		Flow medium		Water and	water mixtu	ure for clo						N 14868. Wh	nen use	ed in plant					
					Water and water mixture for closed heating and cooling systems according to plant type I for DIN EN 14868. When used in plant Type II for DIN EN 14868 appropriate protective measures are taken. The requirements of VDI 2035, part 1 + 2 are observed.														
		emperature	°F (°0	-				(wa		250 (-10 - +120)									
		e Q _{nom} flang	in. (m	m)					.59 (* ANSI Cla	,									
Connection	on	actuato						MPS		SRU, MP500C-SRI	D								
//aterials i	in the	water/glycol																	
		Valve bodies							Grey iron EN-G	JL-250(GG25)									
Mer	mbra	nes / Bellow / O-	rings		EPDM														
		Springs			Stainless Steel, W.Nr. 1.4568, W.Nr. 1.4310														
	Soc	Cone (Pc) t (Pc) / Seat (Cv	١		Wrought copper, CuZn40Pb3 - CW 614N, Stainless Steel, W.Nr. 1.4305 W.Nr. 1.4305														
	366	Cone (Cv)	,						CuZn40Pb3										
		Screw			Stainless Steel (A2)														
		Flat gasket							NB	R									
ible 14. S		ication Flange V /alve size	ersion, 5									10"							
						10511					1/20001		VP222A-						
	Pa	rt Number		VP220A-125S	VP220A		VP220A-15	08	VP220A-150H	VP222A-200S	VP222A-200H	VP222A-2	2508	250H					
Flow range	_	Q _{min} (4000() 4)	gal / min	158 395	19 48		256		332	352 880	475 1188	528 1320		652					
	_	(100%) 1) range 2)	%	395	40	5	640 830 40-110%				1100	1320		1630					
Diff.	9	- '	psi	5.8-58	8.7-	58	5.8-58		8.7-58	5.8-58	8.7-58	5.8-58	3	8.7-58					
pressure	3)	ΔpQ_{nom}	[kPa]	[40-400]	[60-4	[00]	[40-400]		[60-400]	[40-400]	[60-400]	[40-40	0]	[60-400]					
		to standard IEC			Class 4, max. 0.01% of Qnom														
		se off differential across the valve			232 psi (16 bar)														
		flange			ANSI Class 125 EN 1092														
Connecti	ion	actuators	S	MP2000-NSR, MP2000-SRU, MP2000-SRD MP4000															
	Fle	ow medium		Water and water mixture for closed heating and cooling systems according to plant type I for DIN EN 14868. When used in plant Type II for DIN EN 14868 appropriate protective measures are taken. The requirements of VDI 2035, part 1 + 2 are observed.															
Boo	dy pr	essure rating ps	i	Class 125 per AS	is 125 per ASME B16.1-2010 Material Class B per ASTM A 126-04 (2014), 200 psi to 150°F, 190 psi to 200°F, 180 psi to 225°F, 175 psi to 250°F														
		ntrol range								s high as flow cha									
Contr	rol va	lve's characteris				Stem up	p open, Line	ear (co	uld be converte	d by actuator to e	qual percentage	e)							
Mediu	um te	mperature	°F (°C)					(wate	r/glycol) 15 to 25	50 (-10 - +120)									
Si	troke	(Q _{nom})	in. (mm)						1.18 (30	0)									
	\/-	live bodies				Ma	aterials in the		r/glycol ey iron EN-GJL-:	250 (GG 25)									
Memb		s/ Bellow / O-Rir	ngs	W.Nr.	1.4571			- OI	oy HOH EN-OJE-	250 (GG 25) EPDN	Л								
		Springs		Stainless Ste		1401				Stainless Steel,									
Co	one (Pc) / Cone (Cv)		Stainless Stee	, W.Nr.1.44	04NC				Stainless Steel,	W.Nr.1.4021								
		lat gasket		Graphi	te gasket					Non asbe	estos								
S	seat (Pc) / Seat (Cv)							Stainless Steel, V										
Screw 1) Factory setting of the valve is done a				O (100%) or lov	Stainless Steel, W.Nr.1.1181 O (100%) or lower depending on flow rate ordered.														

Factory setting of the valve is done at Ω_{nom} (100%) or lower depending on flow rate ordered. Regardless of the setting, the valve can modulate below 1% of set flow. $\Delta p = (P1-P3) \min -max$ 87 psi Δp is possible if consideration has been made to the flow velocity, cavitation and noise. For application usage, please contact Product Support Pc - Pressure controller Cv - Control valve



PIBCV Assembly Valve Body Configurations

Pipe size (in.)	Valve Assembly part number series	Complete Valve Body part number	Valve type	Female NPT End Connectors (included with all 1/2" through 2" Valve Actuator Assemblies)	PT ports	Installation data
1/2	VP228E-10LN-	VP228E-10BQLNT	Threaded	911 2108 010		
1/2	VP228E-10L-	VP228E-10BQL	Threaded	911 2108 010	Yes	
1/2	VP228E-15LN-	VP228E-15BQLNT	Threaded	911 2108 015		
1/2	VP228E-15L-	VP228E-15BQL	Threaded	911 2108 015	Yes	
1/2	VP228E-15SN-	VP228E-15BQSNT	Threaded	911 2108 015		
1/2	VP228E-15S-	VP228E-15BQS	Threaded	911 2108 015	Yes	
1/2	VP229E-15HN-	VP229E-15BQHNT	Threaded	911 2108 015		
3/4	VP228E-20SN-	VP228E-20BQSNT	Threaded	911 2108 020		
3/4	VP228E-20S-	VP228E-20BQS	Threaded	911 2108 020	Yes	F-27937
3/4	VP229E-20HN-	VP229E-20BQHNT	Threaded	911 2108 020		
1	VP229E-25SN-	VP229E-25BQSNT	Threaded	911 2108 025		
1	VP229E-25S-	VP229E-25BQS	Threaded	911 2108 025	Yes	
1	VP229E-25HN-	VP229E-25BQHNT	Threaded	911 2108 025		
1-1/4	VP229E-32SN-	VP229E-32BQSNT	Threaded	911 2108 032		
1-1/4	VP229E-32S-	VP229E-32BQS	Threaded	911 2108 032	Yes	
1-1/4	VP229E-32HN-	VP229E-32BQHNT	Threaded	911 2108 032		
1-1/2	VP220E-40S-	VP220E-40CQS	Threaded	911 2108 040	Yes	
2	VP220E-50S-	VP220E-50CQS	Threaded	911 2108 050	Yes	
2-1/2	VP220A-65S-	VP220A-65CQS	Flanged		Yes	
2-1/2	VP220A-65H	VP220A-65CQH	Flanged		Yes	
3	VP220A-80S-	VP220A-80CQS	Flanged		Yes	F-27934
3	VP220A-80H	VP220A-80CQH	Flanged		Yes	
4	VP220A-100S-	VP220A-100CQS	Flanged		Yes	
4	VP220A-100H	VP220A-100CQH	Flanged		Yes	
5	VP220A-125S-	VP221A-125CQS	Flanged		Yes	
5	VP220A-125H-	VP221A-125CQH	Flanged		Yes	
6	VP220A-150S-	VP221A-150CQS	Flanged		Yes	
6	VP220A-150H-	VP221A-150CQH	Flanged		Yes	E 07000
8	VP222A-200S-	VP222A-200CQS	Flanged		Yes	F-27939
8	VP222A-200H-	VP222A-200CQH	Flanged		Yes	
10	VP222A-250S-	VP222A-250CQS	Flanged		Yes	
10	VP222A-250H-	VP222A-250CQH	Flanged		Yes	

PIBCV Valve Actuator Codes and ½" to 2" Tail Pieces


Table 16. Selection	: Valve Actuator code	es			
Actuator part number	Actuator code	Valve sizes	Non spring return	Spring return open	Spring return close
MP131-24T	A101				
MP131-24F	F101		•		
MP131-24MP	S101	½" to 1¼"			
MP300-SRU	U201	72 53 174		•	
MP300-SRD	U301				•
MP500C	U131		•		
MP500C-SRU	U231	1½" to 4"		•	
MP500C-SRD	U331				•
MP2000-NSR	U161	5" and 6"	•		
MP2000-SRU	U261			•	
MP2000-SRD	U361				•
MP4000	U181	8" and 10"	•		


Table 17. Selection: 1/2" to 2" Valve Body Tail Pieces

	Part number	Pipe size	(A) Approxi- mate length inches (mm)	Approximate nut size inches (mm)	(B) Approximate Valve Body thread engage- ment inches (mm)	Comments	Image
ets	911 2108 010	1/2"	1.1 (28)	0.99 (25)	0.29 (7.2)	For VP228E-10BQLNT and VP228E-10BQL 1/2" valve bodies only	
Female NPT Two Female NPT Connectors, Two Gaskets	911 2108 015	1/2"	1.1 (28)	1.19 (30.2)	0.29 (7.2)	For all 1/2" valve bodies except VP228E- 10BQLNT and VP228E-10BQL	TA
% ™ %	911 2108 020	3/4"	1.26 (32)	1.46 (37)	0.33 (8.4)	For all 3/4" valve bodies	
VPT ctors	911 2108 025	1"	1.5 (38)	1.81 (45.8)	0.41 (10.4)	For all 1" valve bodies	
iale l	911 2108 032	1-1/4"	1.65 (42)	2.05 (52.1)	0.42 (10.7)	For all 1-1/4" valve bodies	1 11 TW
Fer	911 2108 040	1-1/2"	1.85 (47)	2.52 (63.9)	0.55 (14)	For 1-1/2" valve body	1 10
Ż	911 2108 050	2"	1.93 (49)	3.24 (82.2)	0.69 (17.5)	For 2" valve body	
. 0	911 2110 010	3/8"	1.24 (31.5)	0.99 (25)	0.29 (7.2)	For VP228E-10BQLNT and VP228E-10BQL 1/2" valve bodies only	
Male NPT Two Male NPT Connectors, Two Nuts, Two Gaskets	911 2110 015	1/2"	1.32 (33.5)	1.19 (30.2)	0.29 (7.2)	For all 1/2" valve bodies except VP228E- 10BQLNT and VP228E-10BQL	
T Two Mirs, Two N Gaskets	911 2110 020	3/4"	1.5 (38)	1.46 (37)	0.33 (8.4)	For all 3/4" valve bodies	(D) Paramar
אדד ors, ⁻ Gas	911 2110 025	1"	1.73 (44)	1.81 (45.8)	0.41 (10.4)	For all 1" valve bodies	
le N	911 2110 032	1-1/4"	1.85 (47)	2.05 (52.1)	0.42 (10.7)	For all 1-1/4" valve bodies	
Con	911 2110 040	1-1/2"	2.28 (58)	2.52 (63.9)	0.55 (14)	For 1-1/2" valve body	
	911 2110 050	2"	2.81 (71.5)	3.24 (82.2)	0.69 (17.5)	For 2" valve body	
nds,	911 2109 010	3/8" Tubing (with 1/2" OD)	1.06 (27)	0.99 (25)	0.29 (7.2)	For VP228E-10BQLNT and VP228E-10BQL 1/2" valve bodies only	
Female Sweat Two Female Sweat Ends, Two Nuts, Two Gaskets	911 2109 015	1/2" Tubing (with 5/8" OD)	1.32 (33.5)	1.19 (30.2)	0.29 (7.2)	For all 1/2" valve bodies except VP228E- 10BQLNT and VP228E-10BQL	
male S o Gask	911 2109 020	3/4" Tubing (with 7/8" OD)	1.5 (38)	1.46 (37)	0.33 (8.4)	For all 3/4" valve bodies	
wo Fe its, Tw	911 2109 025	1" Tubing (with 1-1/8" OD)	1.73 (44)	1.81 (45.8)	0.41 (10.4)	For all 1" valve bodies	
weat T wo Nu	911 2109 032	1-1/4" Tubing (with 1-3/8" OD)	1.85 (47)	2.05 (52.1)	0.42 (10.7)	For all 1-1/4" valve bodies	
male S T	911 2109 040	1-1/2" Tubing (with 1-5/8" OD)	2.36 (60)	2.52 (63.9)	0.55 (14)	For 1-1/2" valve body	
Fel	911 2109 050	2" Tubing	2.81 (71.5)	3.24 (82.2)	0.69 (17.5)	For 2" valve body	


PIBCV Dimensions: Threaded 1/2" to 2"

Dimensions Threaded Valves ½ to 1¼" (inches)





With MP131 Actuator






Table 18. Threaded Valves ½ to 1¼" (inches)

			L3		L4			L5				H3	b ISO	Valve	
Туре	L1	L2	(PLUGS)	MP131	MP300 -SRU	MP300 -SRD	MP131	MP300 -SRU/SRD	H1	H1 H2	MP131	MP300 -SRU/SRD	228/1	.83 1 1.43	
1/2" VP228E- 10Lx	2	1.41		4.37	5.11	5.90			2.9	.78	5.6	7.2	G ½	.83	
1/2"	2.5	1.7		4.64	5.39	6.14	3 5.35		3	1	5.7	7.4	G ¾	1	
3/4"	3.2	2.2	3.11	4.96	5.7	6.53		5.7	3	1.2	5.8	7.5	G 1	1.43	
1"	4	2.7		5.55	6.3	7.08			3.5	1.5	6.14	7.83	G 1 1/4	3.2	
11/4"	5.1	3.5		6.26	7	7.8			3.9	2.3	6.58	8.27	G 1 ½	4.8	

For assemblies with Female NPT: L6= (2x Column A - 2x Column B) +L1

Threaded Valves 11/2" and 2" (inches)


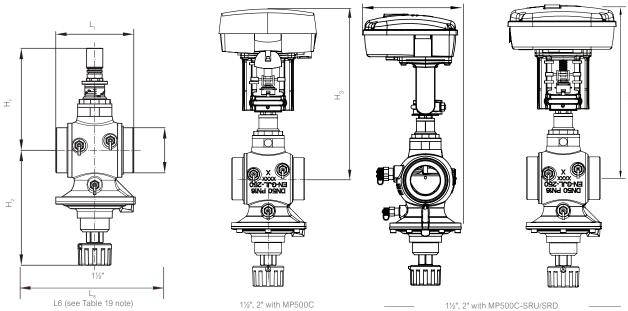


Table 19. Threaded Valves 11/2" and 2" (inches)

Туре	L1	L2	H1	H2	Н3	b ISO 228/1	Valve Body Weight lb
1½"	4.33	7.19	6.7	6.85	11	G 2	15.8
2"	5.11	7.19	0.7	0.00	11	G 2½	18.0

PIBCV Dimensions: 21/2" to 6" Flanged Valves

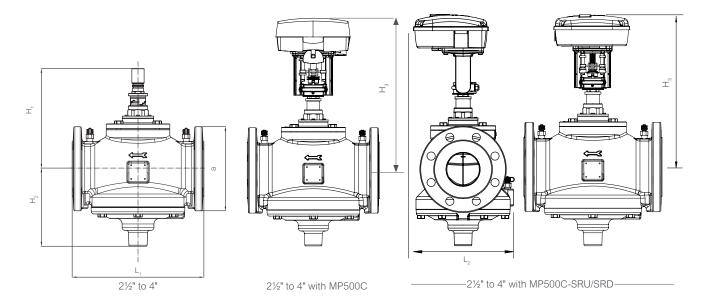

	i idiigod vo		. (
Type	L1	L2	H1	H2	H3	a (EN 1092-2)	Valve Body Weight (lb)	No. of Flange Bolt Holes
2½"	11.4	8.76	8.6	6.77	13	7.2	84	4
3"	12.2	8.88	8.9	6.96	13.1	7.87	99	4
4"	13.7	10.07	9.44	7.36	13.7	8.66	126	8

Flanged Valves 5" and 6"

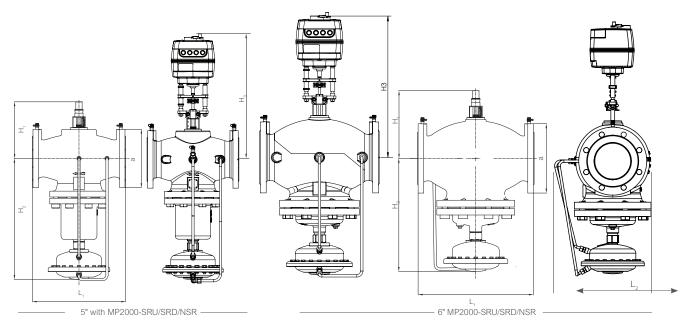


Table 21. Flanged Valves 5" and 6" (inches)

Туре	L1	L2	H1	H2	H3 MP2000-SRU/SRD/NSR	a (EN 1092-2)	Valve Body Weight (lb.)	No. of Flange Bolt Holes
5"	15.7	14.45	10.7	21.1	20.94	9.84	188	8
6"	18.9	15.88	12.1	19.6	22.36	11.22	304	8

PIBCV Dimensions: 8" and 10" Flanged and Adaptors


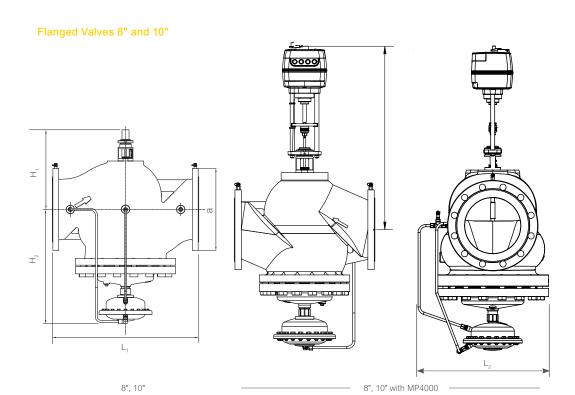


Table 22a. Flanged Valves 8" and 10" (inches)

Туре	L1	L2	H1	H2	H3 MP4000	a (EN 1092-2)	Valve body weight (lb.)	No. of flange bolt holes
8"	23.6	19.57	17.0	19.0	24.3	13.38	482	12
10"	28.7	22.98	16.9	20.9	27.8	15.9	753	12

Table 22b. Valve Flange Adaptors 8" and 10"



Size	8" (200 mm)	10" (250mm)		
Part number	D2576-16-200	D2576-16-250		
Bolt hole diameter	.87" (22 mm)	1.02" (25.9 mm)		
Bolt circle	11.61" (294.89 mm)	13.98" (355.09 mm)		
Pressure	PN	l16		
d	8.63" (219.1 mm)	10.75" (273mm)		
D	13.39" (340 mm)	15.94" (405mm)		
С	11.61" (295 mm)	13.98" (355mm)		
Number of bolts	1	2		
h	0.87" (22 mm)	1.02" (26mm)		
t	1.024" (26 mm)	1.14" (29mm)		
Weight	24.03 lbs (10.9 kg)	39.68 lbs (18.0 kg)		
Material	Carbon Steel	Carbon Steel		
IMPA/ISSA code	734554	734555		
	735564	735565		



PIBCV Valve Flow Ranges: ½" to 2"

Table 23. ½ to 2" V	alve Flow Rar											
Flow rate (GPM)		1/	2"		3/	4"	1	"	11	/4"	11/2"	2"
Without PT Ports	VP228E- 10BQLNT	VP228E- 15BQLNT	VP228E- 15BQSNT	VP229E- 15BQHNT	VP228E- 20BQSNT	VP229E- 20BQHNT	VP229E- 25BQSNT	VP229E- 25BQHNT	VP229E- 32BQSNT	VP229E- 32BQHNT	-	-
With PT Ports	VP228E- 10BQL	VP228E- 15BQL	VP228E- 15BQS	-	VP228E- 20BQS	-	VP229E- 25BQS	-	VP229E- 32BQS	-	VP220E- 40CQS	VP220E- 50CQS
0.5	1	1	1									
1.0		1	1	1	1							
1.5			1	1	1	1	1					
2.0			1	1	1	1	1					
2.5				1	1	1	1	1				
3.0				1	1	1	1	1	1			
3.5				1	1	1	1	1	1	1		
4.0				1	1	1	1	1	1	1		
4.5				1	(1)	1	1	1	1	1		
5.0				1		1	1	1	1	1		
5.5				(1)		1	1	1	1	1		
6.0						1	1	1	1	1		
6.5						1	1	1	1	1		
7.0						1	1	1	1	1		
7.5						1	1	1	1	1		
8.0						(1)	(1)	1	1	1		
8.5								1	1	1		
9.0								1	1	1		
9.5								1	1	1		
10								1	1	1		
11								1	1	1		
12								1	1	1		
13								(1)	1	1	1	
14									1	1	1	
15									(1)	1	1	
16										1	1	
17										1	1	
18										(1)	1	
19										(1)	1	
20											1	
21											1	
22											1	1
23											1	1
24											1	1
25											1	1
26											1	1
27											1	1
28											1	1
29											1	1
30											1	1
31											1	1
32											1	1
33											1	1
34												1
35												1
36												1
37												1
38												1
39												1
40												1
44												1
48												1
52												1
55												1

 $(\mathbf{Q}_{\mathrm{high}}$ setting) All flanged valves come standard with PT ports



PIBCV Valve Flow Ranges: 21/2 to 10" Flanged

				es (Q _{min} to Q										
Size		/2"		3"		."		5"		6"		3"	-	0"
Flow rate (GPM)	VP220A- 65CQS	VP220A- 65CQH	VP220A- 80CQS	VP220A- 80CQH	VP220A- 100CQS	VP220A- 100CQH	VP221A- 125CQS	VP221A- 125CQH	VP221A- 150CQS	VP221A- 150CQH	VP222A- 200CQS	VP222A- 200CQH	VP222A- 250CQS	VP222A 250CQI
35	34													
40	1													
45	1	44												
50	1	1	48											
55	1	1	1											
60	1	1	1											
65	1	1	1											
70	1	1	1	70	66									
75	1	1	1	1	1									
80	1	1	1	1	1									
85	85	1	1	1	1									
90		1	1	1	1									
95		1	1	1	1									
100		110	1	1	1	104								
120		110	120	1	1	1								-
140			120	1	1	1								1
160				176	165	1	158							
180				170	100	1	1							-
200						1	1	194						-
250						260	1	1						-
						200	1	1	250					-
300								1	256 1	222	252			-
350							1		1	332	352			-
400							395	1		1	1	475		-
450								485	1	1	1	475	500	
500									1	1	1	1	528	-
550									1	1	1	1	1	
600									640	1	1	1	1	
650										1	1	1	1	652
700										1	1	1	1	1
750										1	1	1	1	1
800										830	880	1	1	1
850												1	1	1
900												1	1	1
950												1	1	1
1000												1	1	1
1100												1188	1	1
1200													1320	1
1300														1
1400														1
1500														1
1600														1630
1700														

All flanged valves come standard with the PT ports

Specification Submittal Text

- SpaceLogic PIBCV has the following specifications:

 1. NPS 2 and Smaller: PN 16, stainless steel components.

 2. NPS 2-1/2 through 10: Class 125 cast iron body per ASME B16.1-2010, Material class B per ASTM A 126-04 (2014), stainless steel components.

 3. Accuracy NPS 3/4 and Smaller: The control valves shall accurately control the
- flow from 0 to 100% rated flow with a differential pressure range of 2.32 to 58 psi for low and standard flow units, 5 to 58 psi for high flow units within 5% of
- psi for low and standard flow units, 5 to 56 psi for high flow units within 5% of set flow value.

 Accuracy NPS 1 through 1-1/4: The control valves shall accurately control the flow from 0 to 100% rated flow with a differential pressure range of 2.9 to 58 psi for standard flow units, 5 to 58 psi for high flow units within 5% of set flow value.

 Accuracy NPS 1-1/2 through 4: The control valves shall accurately control the
- flow from 0 to 100% rated flow with a differential pressure range of 4.35 to 58 psi for standard flow units, 8.7 to 58 psi for high flow units within 5% of set flow
- Accuracy NPS 5 through 10: The control valves shall accurately control the flow from 0 to 100% rated flow with a differential pressure range of 5.8 to 58 psi for standard flow units, 8.7 to 58 psi for high flow units within 5% of set flow value. Flow Characteristics: Linear Control, selectable to equal percentage at the
- proportional valve actuator.
- Field adjustable flow by means of a percentage of rated valve flow.
- Position feedback output signal integrated into all proportional actuators. 100% authority with modulating below 1% regardless of flow settings.
- 11. No cartridges requiring replacement or maintenance.12. Close off ratings shall be 232 psi for all valve sizes.
- 13. Valve control range 1:1000.




MP131-24T, 24F, 24MP Floating and Proportional Actuators

MP131 actuators are used together with automatically balanced combination valve type SmartX PIBCV for 1/2" to 1-1/4". Typical applications are temperature control and permanent automatic balancing on terminal units (fan-coils, chilled ceilings, air-handling units).

Features

- Gap detection at stem up position
- 3-point version
- Force switch-off at stem down position prevents overload of actuator and valve
- No tools required for mounting
- Maintenance-free lifetime
- Low-noise operation

Dimensions (mm)






Mounting and Installation

The actuator should be mounted with the valve stem in either horizontal position or pointing upwards. The actuator is fixed to the valve body by means of a ribbed nut which requires no tools for mounting. The ribbed nut should be tightened by hand.

- Check the valve neck. The actuator should be in stem up position (factory setting) and mounted securely on the valve body.
- 2. Wire the actuator according to the wiring diagram.
- 3. Stem movement is indicated by the Position Indicator (a small pin riding in a channel as shown in (1) below).



Specifications		
Power supply	24 Vac/Vdc (+1015%)	
Power consumption		
MP131-24F/T	1.0 VA	
MP131-24MP	1.5 VA, standby 0.4 W	
Frequency	50/60 Hz	
Control Input MP131-24MP	MP131-24MP 0–10 (2-10) V Ri = 200 Ω	
Control input Y	0–20 (4-20) mA Ri = 500 Ω	
Control output U	$0-10 \text{ V Ro (min)} = 38 \text{ k}\Omega$	
Feedback Control input Y	0–20 (4-20) mA Ri = 500 Ω	
Control output X	$0-10 \text{ V Ro (min)} = 38 \text{ k}\Omega$	
Close off force	130 N	
Stroke	5mm	
0	50 hz: 24 s/mm	
Speed	60 hz: 20 s/mm	
Relative humidity	max. 95%	
Max. medium temperature	248°F (120°C)	
Ambient temperature	32-131°F (0-55°C)	
Storage and transport temperature	-40-158°F (-40-70°C)	
Protection class	IP 42	
Weight	.66 lbs (0.3 kg)	
Sound power level	Max. 35 dB(A)	
Standards/Directives		
Heat	IEC 60068-2-2	
Humidity	IEC 60068-2-3	
Cold	IEC 60068-2-1	
Vibration	IEC 60068-2-6	

c-UL-us LISTED mark compliance per UL 60730-1 & -2-14 and CAN/CSA E60730-1 & -2-14. CE mark compliance per directives [2014/35/EU] LVD, [2014/30/ EU] EMC, and [2011/65/EU] ROHS2. RCM mark compliance for Australia/New Zealand community.



Regulatory Compliance


MP300-SRU/SRD Multi-Signal Actuators

MP300-SRU/SRD actuators with Floating and Proportional control are low voltage motoric actuators for the SmartX PIBCV DN10-32 (½"-1½") Valves. These actuators have a spring return safety function that provides for an open or close valve in the event of power loss. The spring return safety function should not be used for two position control.

Features

- The advanced design incorporates load related 'switch- off' to ensure that the actuators and valves are not exposed to overload.
- The advanced design incorporates a diagnostic LED, operational data capture and self stroking
- Low weight and robust.
- Spring Return operation in the event of power failure.

Dimensions (mm)



Actuator Valve Combinations

MP300-SRU for a normally open valve. MP300-SRD for a normally closed valve.





VP228E, VP229E

VP228E, VP229E

Specifications	
Power supply	24 Vac/Vdc (+1015%
Power consumption	9 VA
Frequency	50/60 Hz
Control input Y	0-10 (2-10) V; 0-20 (4-20) mA
Control output U	0–10 (2–10) V
Closing force	300 N
Max. stroke	5.5mm
Speed	11.75 (60 hz) s/mm 14 (50 hz) s/mm
Max. medium temperature	248 °F (120°C)
Ambient temperature	0-55°C
Storage and transport temperature	-40–158 °F (–40–70°C)
Grade of enclosure	IP 54
Weight	0.8 kg
Sound power level**	40 dB (A) ** Consideration should be given to the noise of mechanical spring return actuators in hotel guest rooms or other applications requiring silent operation
EMC Standards/Directives	2014/30/EU EN 61000-6-2 & EN 61000-6-3
LVD Standards/Directives RoHS2 Directives	2014/35/EU EN 60730-1 & EN 60730-2-14 2011/65/EU &RoHS2 Amendment 2015/863/EU
UL CSA	c-UL-us LISTED using UL 60730-1 & -2 -14 and CSA/CAN E60730-1A & -2 -14

Part number	SR Direction	Linkage (incl. with actuator)	
MP300-SRU	Up - Normally Open	Adapter*	
MP300-SRD Down - Normally Closed Spacer		Spacer	
* Total height of the assembly increases with the use of the Adapter model.			





MP500C, MP500C-SRU/SRD Multi-Signal Actuators

MP500C are linear electro-mechanical actuators for use with VP220x SmartX PIBCV valves, DN40–100, controlled by either an increase/decrease floating signal or by a range of modulating control signals in the range 0–10V. SRU/SRD models have a spring return feature. The U-Bolt connection allows quick and easy direct mounting onto the SmartX PIBCV VP220 valves.

Features

- Brushless DC motor.
- High resolution control board allows precise fluid control.
- Working range and end point switches adjusted automatically to the stroke
 of the valve.
- When driven electrically, firmware calibrates a consistent running time regardless of the valve stroke.
- During power loss SRU/SRD spring return drives the motor, generating power to the board, controlling braking speed which avoids mechanical stress and system water hammer.
- Actuators can be configured for either 3-point increase/decrease signal or various modulating control signals including sequencing.
- Stroke indicators on the yoke provide clear visual indication of the valve opening/stroke status.



MP500C-SRU/SRD



MP500C

Specifications

Specifications	
MP500C MP500C-SRU (-W) MP500C-SRD (-W)	Non-Spring Return Stem up (retract) Stem down (extend)
Voltage supply	24 Vac ±20% 50-60Hz 24 Vdc ±20%
Transformer Sizing	50 VA
Power consumption Running Rest MP500C	30 VA (21 W) 7 W average 15 VA
Running Time Modulating Increase/decrease (selectable) Spring return	15 sec. 60/300 sec. 13 sec.
Stroke	235 mm
Force, nominal	500 N
Duty cycle Full load, high amb. temp. Half load, room temp.	20%/60 minutes 80%/60 min.
Analog input Voltage range (se	lectable) 010, 210, 05, 26, 510, 610 Vdc
Impedance	Min. 100 k Ohm
Digital inputs, Y1, Y2 Voltage across open input Current through closed input	24 Vac 5 mA
Pulse time	min. 20 ms
Output, U Position Feedback Load	210 or 05 Vdc (0-100%) 2 mA
Environmental Operation Temperature Storage Temperature Ambient Humidity	14122°F (-1050 °C) -13149°F (-2565 °C) max 90% RH (non-condensing)
Sound power level NSR	32 dBa

Enclosure rating MP500C, MP500C-SRU, MP500C-SR MP500C-SRU-W, MP500C-SRD-W	RD	IP54 (NEMA 2) IP65 (NEMA 4)
Standards/Directives ElectroMagnetic Compatability [EMCLow voltage directive [LVD] Restriction of Hazardous Substance Heat Humidity Cold Vibration	1	2014/30/EU 2014/35/EU 2011/65/EC IEC 60068-2-2 IEC 60068-2-3 IEC 60068-2-1 IEC 60068-2-6
Weight		3.2 Kg
Materials of Construction; Housing a Max cable core diameter	and Cover	Aluminum 2.5 mm²
Wiring Entry: Conduit connection Cable gland		20 capped holes 2 mm O/D, IP68
Direct connection to Smart X PIBCV	valves VP22	20 DN40100
S2 Auxillary Switch Relay (optional a (contacts made at 5% and 95% of e	,	SPDT, 24 Vac 4A AC1

Part Numbers & Accessories

Part Number	Spring Return Direction On Power Failure		Rating
MP500C	Non-Spring Return Actuator		
MP500C-SRU	Spring return stem up	Valve Open	NEMA 2
MP500C-SRD	Spring return stem down	Valve Closed	
MP500C-SRU-W	Spring return stem up	Valve Open	NIEMA 4
MP500C-SRD-W	Spring return stem down	Valve Closed	NEMA 4
880 0104 000	S2 aux end point switches		



43 dBa

SR

MP2000-SRU/SRD/NSR Multi-Signal Actuators


MP2000 SRU/SRD/NSR Actuators with spring return safety function and non-spring return are for fine regulation of large control valves under the demand of the HVAC controller. MP2000 SR can be controlled by either a modulating or a 3-point control signal and is used specifically with the VP221x SmartX PIBCV valves.

Features

- Manual operation mechanical and/or electrical
- Position indication, LED signalization
- Selectable speed 4 or 6 s/mm (3 or 6 s/mm NSR)
- Automatic Stroke Calibration
- Linear to EQ% Curve Adaptation
- Anti-oscillation function
- Voltage or current output signal U
- Auto detection of Y signal
- 3-point or modulating control selection
- Thermal and overload protection
- Precise regulation and fast response on floating signal (0.01 s)



Dimensions



Specifications	
Nominal voltage	24 Vac/Vdc, 50 Hz/60 Hz
Power consumption	15 VA (24V)
Control input signal	Modulating or 3-point floating
Power supply frequence	50/60 Hz
Control input Y	0–10 (2-10) V Ri = 40 Ω
	0–20 (4-20) mA Ri = 500 Ω
Control output U	0–10 Vdc (2–10 Vdc) Ri = 10k Ω
	0–20 mA (4–20 ma) Ri = 510 Ω
Force	2000 N (450 lbf)
Stroke	50mm (2")
Speed	4 s/mm or 6 s/mm
Max. medium temperature	200 °C (392°F)
Ambient temperature	0-55 °C (32-131°F)
Storage and transport temperature	-40-70 °C (-40-158°F); Storing for three days
Humidity	5–95%
Protection class	IIII safety extra-low voltage
Grade of enclosure	IP54, NEMA 2
Weight	8.6 kg (18.96 lbs); 6.36 kg NSR (13.8 lbs)
Safety function	Yes
Safety function runtime 50mm	120 S
stroke	120 5
Manual operation	Electrical and mechanical
Power failure response	
MP2000-SRD Safety function	stem extends down
MP2000-SRU Safety function	stem retracts up
Standards/Directives	
Heat	IEC 60068-2-2
Humidity	IEC 60068-2-3
Cold	IEC 60068-2-1
Vibration	IEC 60068-2-6
	c-UL-us LISTED mark compliance per UL 60730-1 & -2-14 and CAN/CSA E60730-1 & -2-14. C
Regulatory compliance	mark compliance per directives [2014/35/EU] LVD, [2014/30/EU] EMC, and [2011/65/EU] RoHS

Part number	Spring return direction	
MP2000-SRD	Stem down, extends (valve closed)	
MP2000-SRU	Stem up, retracts (valve open)	
MP2000-NSR	Non-spring return	



RCM mark compliance for Australia/New Zealand community.

MP2000-SRU/SRD/NSR Multi-Signal Actuators

Product Description

MP2000 SRU/SRD/NSR Actuators with spring return safety function and non-spring return are for fine regulation of large control valves under the demand of the HVAC controller. MP2000 SR can be controlled by either a modulating or a 3-point control signal and is used specifically with the VP221x SmartX PIBCV valves.

Specifications

Nominal voltage 24 Vac/Vdc, 50 Hz/60 Hz Power consumption 15 VA (24 V) Control input signal Modulating or 3-point floating **Power Supply** Frequency

24 Vac/dc; +10 ... -15 %; 50/60 Hz Control input Y

0 ... 10 V (2 ... 10 V) $Ri = 40 \text{ k}\Omega$ 0 ... 20 mA (4 ... 20 mA) $Ri = 500 \Omega$

Output U

(Position Feedback) $0 ... 10 V (2 ... 10 V) 10 k\Omega$ $0...20 \text{ mA} (4...20 \text{ mA}) 510 \Omega$

Force

2000 N (450 lbf)

Stroke

50 mm (2") Speed (selectable)

Max. medium temperature

Ambient temperature

Storage and transport

temperature

-40° ... + 70°C (-40°...158°F)

(storing for 3 days)

IP 54, NEMA Type 2

Electrical and Mechanical

Stem extends down Stem retracts up

MP2000-SRD Safety function

8.6 kg (18.96 lbs) 6.26 kg NSR (13.8 lbs)

4 or 6 s/mm

200°C (392°F)

0° ... + 55°C

(32°...131°F)

5...95%

Yes

120 s

Humidity

Protection class

Safety function

Grade of enclosure

Weight

Safety function runtime 50mm stroke

Manual operation

Power failure response

MP2000-SRU Safety function

Features

Manual operation mechanical and/or electrical

Position indication, LED signalization

Selectable speed 4 or 6 s/mm (3 or 6 s/mm NSR)

Automatic Stroke Calibration

Linear to EQ% Curve Adaptation

Anti-oscillation function

Voltage or current output signal U

Auto detection of Y signal

3-point or modulating control selection

Thermal and overload protection

Precise regulation and fast response on floating signal

(0.01s)

Standards/Directives

Heat Humidity Cold

Vibration

IEC 60068-2-2 IEC 60068-2-3 IEC 60068-2-1 IEC 60068-2-6

Regulatory Compliance

c-UL-us LISTED mark compliance per UL 60730-1 & -2-14 and CAN/CSA E60730-1 & -2-14. CE mark compliance per directives [2014/35/EU] LVD, [2014/30/EU] EMC, and [2011/65/EU] RoHS2. RCM mark compliance for Australia/New Zealand community.

Part Numbers Part No.

Spring Return Direction

Stem down, extends (valve closed)

MP2000-SRU

Stem up, retracts (valve open)

MP2000-NSR

Non-Spring Return III safety extra-low voltage **Dimensions**

mm (inch)

MP2000-SRD



MP4000 Multi-Signal Actuator for VP222x SmartX PIBCV, DN200...250 (8...10")

The MP4000 Actuator is primarily designed to regulate valves in response to the demand of a controller in HVAC systems. MP4000 can be controlled by electronic controllers with modulating or 3-point control output.

- Manual operation mechanical and/or electrical
- Position indication, LED signalization
- Selectable speed 3 s/mm or 6 s/mm
- Automatic adaptation of stroke to valve's end positions that reduces commissioning time (self-stroking)
- Integrated external switch
- Characteristic optimization
- Adjustable stroke limitation
- Anti-oscillation function
- Pulse or continuous output signal (K2, K4)
- Voltage or current output signal U
- External reset button
- Auto detection of Y signal
- 3-point floating or modulating control selection
- Galvanic isolation Y, U and output terminal K2, K4
- Thermic and overload protection

 Inermic and overload protection Precise regulation and fast response on 3-point signal (0.01 s) 		
Specifications		
Power supply	24 Vac/Vdc (+1015%)	
Power consumption	15 VA (24V)	
Frequency	50/60 Hz	
Control input Y	0–10 (2-10) V Ri = 100 Ω 0–20 (4-20) mA Ri = 500 Ω	
Control output U	0–10 Vdc (2–10 Vdc) Ri = 2k Ω 0–20 mA (4–20 ma) Ri = 500 Ω	
Close off force	4000 N (899.23)	
Max. stroke	80mm	
Speed	3 s/mm or 6 s/mm	
Max. medium temperature	200°C (392°F)	
Ambient temperature	0-55°C (32-131°F)	
Storage and transport temperature	-40-70°C (-40-158°F) Storing for three days	
Humidity	5–95%	
Protection class	II	
Grade of enclosure	IP54, NEMA 2	
Electrical connection	Conduit	
Weight	7.5 (16.53 lbs)	
Manual operation	Electrical and mechanical	
Power failure response	Steam remains in last position	



IEC 60068-2-2

IEC 60068-2-3

IEC 60068-2-1



Standards

Heat Humidity

Cold

Vibration

SP90 Multi-Function Actuator High Accuracy Multi-Function Field Bus Actuators

Product Description

Schneider Electric's **SpaceLogic** SP90 is a high accuracy multi-function field bus actuator, specifically designed for use in combination with DN10...32 (3/8"...1¼") SmartX PIBCV valves.

The high positional accuracy, together with the linear flow characteristic of the SmartX PIBCV valve, allow the **SpaceLogic** SP90 to be used as a flow indicator. When the SP90 is connected to temperature sensors across a coil, heat consumption will also be calculated.

Set up of the actuator and valve parameters are all made via fieldbus. The remote flow adjustment saves considerable time during mechanical installation/flow balancing with no need to adjust the flow setting dial on the valve.

ilve.

- All remote design flow settings made from the BMS
- Pluggable cables with Daisy chain connectivity allowing for super quick installation and reduction of miswiring
- LED status indication
- Auto MAC addressing
- Alarm reporting

Features

- Spare 0...10 V and 2xPt1000 input
- Additional 0...10 V output



Specifications

Power supply range	24 V ac/dc, ± 25%, 50 / 60 Hz
Power consumption	Running: 3.9 VA Standby: 0.9 W
Protection class	III safety extra-low voltage
Electrical connection	Pre-molded plug connector
Control signals	BACnet MS/TP, Modbus 010 Vdc, 420 mA
Actuator speed selections (sec/mm)	3, 6, 12, 24, Constant Time
Stroke	7 mm
Force	90 N
Positional accuracy Accuracy, Calculated Energy Usage	± 0.05 mm +/- 10%
Working Ambient temp. Max. medium temp.	-10°50 °C (14122 °F) 120 °C (248 °F)
Storage temp. range	−4070 °C (−40158 °F)
Sound Power Level	Max. 30 dB(A)
Enclosure rating	IP54 (IP40 upside-down)
Weight	0.4 kg (0.88 lb)
BACnet Data	
BACnet device profile	BACnet Application Specific Controller (B-ASC)
BACnet protocol	BACnet Master Slave / Token Passing (MS/TP)
BACnet baud rates supported	Auto baud rate detection / 9600 bps / 19200 bps / 38400 bps / 56700 bps / 76800 bps / 115200bps

Modbus RTU Data	
Supported baud rates	Auto baud rate detection / 9600 bps / 19200 bps / 38400 bps / 56700 bps / 76800 bps / 115200bps
Supported transmission modes	Parity: None (1-8-N-2) / Odd (1-8-O-1) / Even (1-8-E-1) / None (1-8-N-1) Data format: Parity (Start bit - Data bits - Parity - Stop bits)

Part Numbers

Part No.	Description	
SP90-24BMM	Fieldbus PIBCV Actuator	

Cable Accessories

Туре	Length (m)	Connections	Part Number
Digital	1.5	bus / power	9114401500P
	10.0	bus / power	9114410000P
Daisy chain	0.5	actuator / actuator	9114500500P
	1.5		9114501500P
	5.0		9114505000P
	10.0		9114510000P
Analogue + I/O	1.5	actuator / free wires	9114601500P
Energy		PT1000 surface mount temp sensors	9114701500P
		PT1000 Immersed temp sensors	9114801500P


Note: Cables are not included with actuator and must be ordered separately



SP90 Multi-Function Actuator

Dimensions

Threaded Valves ½ to 1¼" (inches).






Table 8. Threaded Valves ½ to 1¼" (inches)

Туре			L3	L4				Valve			
	L1	L2	(PLUGS)	SP90	SP90	H1	H2	SP90	ISO 228/1	Body Weight (lb.)	
1/2" VP228E- 10Lx	2	1.41		4.65		2.9	.78	5.6	G ½	.83	
1/2"	2.5	1.7	3.11	4.92	4.92 5.24 4.33	3	1	5.7	G ¾	1	
3/4"	3.2	2.2	0.11	5.24		3	1.2	5.8	G 1	1.43	
1"	4	2.7		5.83		3.5	1.5	6.14	G 1 1/4	3.2	
11/4"	5.1	3.5		6.54		3.9	2.3	6.58	G 1 ½	4.8	

Note: Valve Body Tail Piece Dimensions: See Columns A and B in "Table 17. Selection: $\frac{1}{2}$ " to 2" Valve Body Tail Pieces" on page 190. For assemblies with Female NPT: L6= (2x Column A - 2x Column B) +L1

Zone Valves

PopTop™



Erie's motorized hydronic valves, the PopTop™, provides convenient, reliable and easy installation for a variety of heating and cooling applications. Installation is a snap with easy, one-handed removal or engagement of the actuator to the valve body. Push the button and lift. It's that simple.

Features

- One-handed engagement or removal of the motorized actuator to the valve body.
- Valve actuator can be easily attached after the valve body has been installed into the system.
- Mounts quickly and easily without the need of linkages or calibration.
- Available in 2-way and 3-way port configurations, 1/2" (15mm) through 1-1/4" (32mm) sweat or 1/2" (15mm) to 1" (25mm) threaded connections, 1.0 to 8.0 Cv range.
- Available factory coupled, or as individual bodies and actuators.
- Direct replacement for all existing PopTop™ applications.
- Rugged 400 PSIG rated brass forged body design for long life.
- UL listed actuator.

Erie Family of Products



Poptop™ Zone Valves

- 1/2", 3/4", 1" and 1-1/4" Sweat, NPT and Inverted Flare Union.
- Two-position (on/off), 2-way and 3-way.
- · General close-off or High close-off.
- · Low voltage or line voltage.



Poptop™ Modulating Valves

- 1/2", 3/4", and 1-1/4" Sweat, NPT.
- Three-wire (on/off), 2-way and 3-way.
- 0-10, 0-5, 5-10 Vdc or 4-20 mA proportional inputs.
- Spring return or non-spring return.
- · Time out feature available.

PopTop™ Two Position Valves & Actuators ¬



General Close-Off

For your residential and commercial applications, Erie's General Close-Off valves and actuators offer precision control for 2-position (on/off) spring return temperature control. The General Close-Off may be used in a wide range of applications such as radiant baseboard and fan coil for easy installation and maintenance.



High Close-Off "HCO"

For high-rise and commercial applications, where higher close-off is required, our High Close-Off valves and actuators offer precise temperature control. Our two-position (on/off) "HCO" actuator may be interchanged with General Close-Off actuators. This may be used in applications such as fan coil and VAV reheat.

Features

- Direct replacement for all existing two-position, motorized PopTop applications.
- Sized to fit most baseboard applications.*
- Rugged Brass forged 400 psig rated valve body.
- Up to 60 PSI (75 PSI for HCO valves and actuators) pressure differential close-off
- Spring return operation, normally closed or normally open.
- Voltages 24 to 277 VAC.
- End switch option on general temperature models.
- Terminal block option on general temperature models (24V).
- Chilled, hot water, and low pressure/low temperature steam applications.
- Cv 1.0 to 8.0.
- Hysteresis synchronous motor design for long life.
- Meets or exceeds ANSI IV standard for close-off.
- UL Listed actuator.
- * General Close-Off Valves & Actuators only.


schneider-electric.com/ecostruxure-building

Life Is On Schneider



Modulating Zone Valve Assembly Ordering

Specify three part number fields for the Valve and three for Actuator Assembly part number

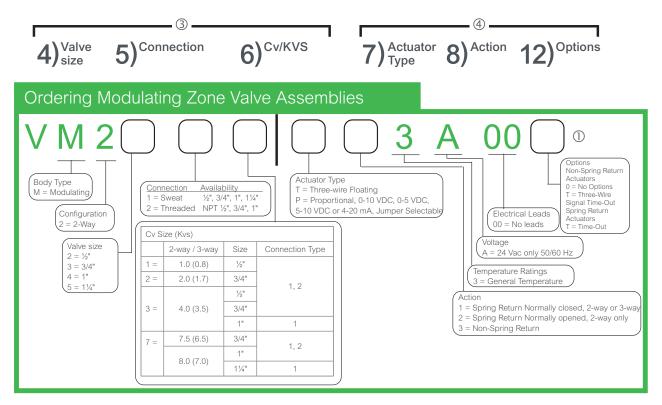


Available Actuators 2

and sto 7 total to 10						
Part number	Action	Actuator type	Option			
AT13A00T	Spring Return	Three Wire Floating	With Time-Out			
AT23A00T	Spring Return	Three Wire Floating	With Time-Out			
AT33A000	AT33A000 Non-Spring Return		None			
AT33A00T	Non-Spring Return	Three Wire Floating	With Time-Out			
AP13A000	Spring Return	Proportional	None			
AP23A000	Spring Return	Proportional	None			
AP33A000	Non-Spring Return	Proportional	None			

- This feature is standard for floating spring return actuators and must be included in the part number.
- ② If the actuator doesn't have a time-out feature then the controller needs to have a time-out feature.
- When ordering only a valve body make selections for the 3 configurable fields shown to derive a 6-digit number.
- When ordering only an actuator, prefix with the letter A then make selections for the 3 configurable fields shown, to derive a 6-digit number (the 5th position is a double zero).

Specify Five Part Number Fields for the Valve and Six for a 2-Position Zone Valve Assembly Part Number

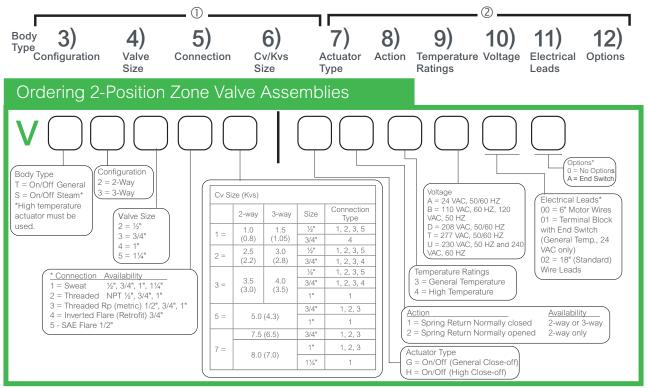

Body & Actuator Combination Requirements

or a riotagior communication to quite mornio						
Temperature Configurations						
Body Configuration	Actuator Spring Return Mode					
VTXXX	A X X 3 X X X X					
T = General	3 = General Temperature					
S = Steam	4 = High Temperature					
If body configuration is T, actuator temp. rating can be 3 or 4	If actuator temp rating is 3, body style must be T					
If body configuration is S, actuator temp. rating must be 4.	If actuator temp rating is 4, body style must be S or T					

- When ordering only a valve body make selections for the five configurable fields shown to derive a 6-digit number.
- When ordering only an actuator, prefix with the letter A then make selections for the six configurable fields shown, to derive a 6-digit number.

* Notes:

- Inverted Flare fittings must be ordered separately. See actuator accessories for fitting part numbers.
- End switch is not available for 277 Vac models if actuator temperature rating is high temperature (4).
- Actuators with terminal blocks required end switch and the end switches is 24 Vac @ 101 mA min. -5A max.
- End switch is 24-240 Vac @ 101 mA min. to 5 A max. and 9-30 Vdc @ 100 mA max. for actuators rated 240V or less. End switch is 277 Vac @ 101 mA min. to 5A max. for actuators rated 277 V.

Erie VM PopTop Series Modulating Valves Floating "T" & Proportional "P"

Standard and Spring Return Modulating Valves

Product Description

The Erie™ Modulating PopTop™ Series valve actuator assemblies are designed for closed hydronic heating and cooling systems. The Modulating PopTop is used to control fluid flow in fan coil units, VAV reheat, unit ventilators, AHUs and radiant applications.


The Modulating PopTop Proportional (P) type is compatible with any 0 to 10 Vdc or 4 to 20 mA signal with jumper selectable operating range and action resulting in precise positioning. The floating (T) type is compatible with any 24 Vac three-wire signal when three minute time-out logic resides in the valve actuator or system controller.

The Modulating PopTop valve assemblies allow the actuator to be snapped onto, or off from, the valve body. The actuator can be mounted after the valve body has been installed into the system without the need for linkages or calibration.


Available in standard (non-spring return) and spring return modulating actuators. The two-way spring return modulating actuators are provided in either normally open or normally closed operation. The three-way valves are available in normally closed operation only. Valve body reversal provides normally open flow for three-way valve bodies.

Features

- Magnetic clutch to maximize the life of the motor and gear train
- Manual operating lever/position indicator facilitates field setup
- Easy to use lever terminal blocks
- · Actuator can be installed after the valve body
- Three wire floating and 0 to 10 Vdc or 4 to 20 mA proportional available
- Spring return will return actuator to normal position when the power is lost for more than two minutes.



Spring Return



Non-Spring Return

Erie VM PopTop Series Modulating Valves Floating "T" & Proportional "P"

Specifications

Timing: Mechanical Action T series Direct acting P series Direct acting (valve opens port B with increase in signal.) Field selectable reverse acting Manual Override Allows manual positioning Operating Pressure Limits 400 psi (2758 kPa) static pressure. Material Actuator High temperature plastic Valve Body Forged brass Stem nickel-plated/chrome-plated brass Seat brass Plug/paddle High temperature thermoplastic/rubber Flow Characteristic 1.0 to 4.0 Cv: equal percentage. 7.0/8.0 Cv: linear Environment **Ambient Temperature Limits** Shipping & Storage -40 to 158°F (-40 to 70°C) Operating

35 to 125°F (2 to 52°C) Fluid 32 to 200° F (0 to 93° C) (not steam rated) 5 to 95% RH, non-condensing. Humidity Seat Leakage ANSI class IV (0.01%) Shipping Weight 1.9 lbs (860 g), actuator and valve body Location NEMA Type 1

Agency Listings (Actuator Only)

North America c-UL-us LISTED per UL 60730-1

& -2-14 and CSA/CAN E60730-1 & -2-14. FCC Part15 ClassB and ICES-003

ClassB compliant. Plenum Rated per UL 2043 testing. European Union LVD 2014/35/EU and

EMC 2014/30/EU directives, per EN 60730-1 & -2-14. EN 6100-6-2 immunity

& EN 61000-6-3 emissions complaint. Australia/New Zealand This product meets requirements to bear the RCM mark.

Inputs

	Floating Actuator				Total Actuate	or, Max.
ŀ				rcuit, Max.	Powerup Inrush	Running
Series	Action	Vac	mA	VA	VA	VA
AT13A00T	Spring Return		24	0.6		1.9
AT23A00T		24 Vac	24	0.6	10	1.9
AT33A000	Non- Spring Return	+25%/-15% 50/60 Hz	-	-	1.0	1.0
AT33A00T			-	-	1.2	1.2

a - Transformer must be sized for Powerup Inrush

Proportional Actuator			0 1 - 1 - 0	0 4 10		Total Actuator, Max.		
			Control Circu	uit, iviax.	Powerup Inrush	Running		
Series	Action	VAC	Range	Rin	VA	VA		
AP13A000	0 . 5 .		0.401/170	00014		1.7		
AP23A000	Spring Return	24 Vac +25%/- 15%	0-10 VDC or 0-5 VDC or 5-10 VDC or 4-20 mA	>200K >200K >200K	10			
AP33A000	Non-Spring Return	50/60 Hz		300	1.7			

a - Transformer must be sized for Powerup Inrush



b - Factory supplied. Actual range is 1-9 Vdc.

Erie VM PopTop Series Modulating Valves Floating "T" & Proportional "P"

Outputs

Series	Mode	Action	Nominal St	troke Time	Total Run Time		
Series	iviode	Action	60 Hz	50 Hz	60 Hz	50 Hz	
AT13A00T						3 min.	
AT23A00T	Floating	Spring Return			3 min.	36 sec.	
AT33A000					No delay		
AT33A00T		Non-Spring Return	2 min. 30 sec.	3 min.	3 min. ± 30 sec.	n/a	
AP13A000			300.			3 min. 18 sec.	
AP23A000	Modulating	Spring Return			2 min.		
AP33A000		Non-Spring Return			45 sec.		

Table 1. Flow Coefficients & Maximum Close-Off Differential Pressure.

			Maximum Close-Off DP, PSI (kPa)					
Valve Size in.	Connection Type	Flow Coefficient Cv (kv)	Non-Spring Operating Mode (Driven Close)	Spring Return Operating Mode (Driven Closed)	Spring Return Power Failure Mode* (Spring Close) PSID			
1/2	NPT, SW, SAE, Rp	1.0 (0.9)	50 (344)	50 (344)	50 (344)			
1/2	NPT, SW, SAE, Rp	0.0 (4.0)	50 (0.14)	50 (0.14)	20 (138)			
3/4	NPT, SW, Rp	2.0 (1.8)	50 (344)	50 (344)				
1/2	NPT, SW, SAE, Rp							
3/4	NPT, SW, SAE, Rp	4.0 (3.5)	35 (241)	35 (241)	20 (138)			
1	SW							
3/4	NPT, SW, Rp	7.5 (6.5)	35 (241)	35 (241)	15 (103)			
1	SW, Rp	0.0 (0.0)	05 (044)	05 (044)	45 (400)			
1-1/4	SW	8.0 (6.9)	35 (241)	35 (241)	15 (103)			

^{*}If valve is driven closed before a power failure, the "operating mode" close-off pressures apply.

Valve Body Legend

NPT — Threaded

SW — Sweat

SAE — Society Automotive Engineers.

Rp—"Metric" Threaded




Erie VM PopTop Series Valve Bodies and Actuators

Product Description

Erie™ PopTop™ Series valve bodies and actuators provide easy installation for a variety of heating and cooling applications. The valve's actuator can be installed after the valve body has been installed onto the fan coil, baseboard or air handler. VS Series valves are available for low pressure steam applications. PopTop Series are two position spring return valves. When powered, the actuator moves to the desired position, tensing the spring return system. When power is removed the actuator returns to the normal position. PopTop Series two position spring return valves can be purchased with an optional built-in auxiliary SPDT end switch for interfacing or signaling; for example, zone pump burner control. Actuators are designed fror cycling applications (not constantly powered).







VT/VS Series with High Close-Off Actuator

Features

- Direct replacement for all existing two-position PopTop applications
- · Hysteresis synchronous motor for long life
- · Spring return operation provides a fail-safe
- Valve body rated for 400 psi static pressure
- · Available in a variety of voltages
- · Actuator mounts directly onto valve body without need for linkages or calibration
- Manual override lever (normally closed only)
- · Actuator can be replaced without any tools, or removal of valve from system
- VS Series available for low pressure steam

Specifications

Service	Hot and chilled water models, up to 50% glycol. Steam models up to 15 psi (both valve body and valve actuator must be rated for high temperature)
System Static Pressure Limits	400 psi (2758 kPa)
Fluid/Ambient Temperature Limits	See Table 1
Close-off	See Table 2
Seat Leakage	ANSI class IV (0.01%) with pressure at inlet (B-port/A-port, if 3-way)
Body	Forged brass
Stem	Nickel-plated
Seat	Brass
Paddle (VT series) (VS series)	Buna N Highly saturated nitrile
Actuator Voltage	24 Vac @ 50/60 Hz, 110 Vac @ 50 Hz, 120 Vac @ 60 Hz, 230 Vac @ 50 Hz, 240 Vac @ 60 Hz, 208 Vac @ 50/60 Hz, 277 Vac @ 50/60 Hz 6.5 watts, 7.5 Va
rower nequirements	0.5 Watts, 7.5 Va

Agency Listings UL873 CUL

European Community

Australia

Catagory Temperature Indicating and Regulating Equipment).

UL Listed for use in Canada by Underwriters Laboratory. Canadian Standards C22.2 No. 24. EMC Directive (89/336/EEC). Low Voltage Directive (72/23/EEC). This product meets requirements to bear the RSM Mark according to the terms specified by the Communications Authority under the Radio

Underwriters laboratories (File #E9429

Shipping Weight (Actuator/Valve Assembly)

2.25 lbs (1020 g).

Communications Act of 1992.

Table 1: Valve Body and Actuator Models

Model	Temperature Range					
VTxxxx	32×200°F (fluid) @ 104 °F (Ambient) (093°C @ 40°C)					
VSxxxx	32×250°F (fluid) @ 169°F (Ambient) (0121°C @ 76°C), and/or 15 PSI (103 kPa) Steam ^a					
Axx3xxx	32×200°F (fluid) @ 104 °F (Ambient) (093°C @ 40°C)					
Axx4xxx	32×250°F (fluid) @ 169 °F (Ambient) \(0 121°C @ 76°C), and/or 15 PSI (103 kPa) Steam ^a					

^a For steam applications both valve body and valve actuator must be rated for high temperature. Example: VS2213G14A020 = Assembly. VS2213 = Valve body. AG14A020 = Actuator.



Erie VM PopTop Series Valve Bodies and Actuators

Accessories for Inverted Flare Connection Valves

3/4" inverted flare bodies accept the following adapters to copper pipe:

436-214-1	Union nut & elbow assembly, female for 1/2" (5/8" O.D.) copper, 15/16" long
436-220	Union nut & coupling assembly, female for 1/2" (5/8" O.D.) copper, 1-1/16" long
436-252	Union nut & coupling assembly, female for 3/4" (7/8" O.D.) copper, 1-27/32" long
436-229-3	Union nut & nipple assembly, male for 1/2" (5/8" O.D.) copper, 3" long
436-214-4	Union nut & elbow assembly, male for 1/2" (5/8" O.D.) copper, 1-15/16" long

Union nut & coupling assembly, female for 1" (1-1/8" O.D.) copper, 1-3/8" long

Table 2: Flow Coefficients and Maximum Close-Off Pressure Differentials

Valve Size	Connection Type	2-way Cv (kv)	3-way Cv (kv)	(G) Close-Off ΔP PSI (kPa)	(H) PSI Close-Off ΔP (kPa)	
1/2"	NPT, SW, Rp, SAE	1.0 (0.0)	1.5 (20)	00 (414)	75 (517)	
3/4"	IFL	1.0 (0.9)	1.5 (30)	60 (414)	75 (517)	
1/2"	NPT, SW, Rp, SAE	0.5 (0.0)	0.0.(0.0)	40 (070)	FO (0.44)	
3/4"	NPT, SW, IFL, Rp	2.5 (2.2)	3.0 (2.6)	40 (276)	50 (344)	
1/2"	NPT, SW, SAE, Rp					
3/4"	NPT, SW, IFL, Rp	3.5 (3.0)	4.0 (3.4)	25 (172)	30 (208)	
1"	SW					
3/4"	NPT, SW, Rp	5.0 (4.0)	50(40)	00 (407)	05 (470)	
1"	SW	5.0 (4.3)	5.0 (4.3)	20 (137)	25 (172)	
3/4"	NPT, SW, Rp	7.5 (6.5)	7.5 (6.5)	17 (117)	20 (137)	
1"	NPT, SW, Rp	0.0 (0.0)	0.0.(0.0)	47 (447)	20 (427)	
1-1/4"	SW	8.0 (6.9)	8.0 (6.9)	17 (117)	20 (137)	

NPT - Threaded (female) SW - Sweat

IFL - Inverted Flare

SAE - Society of Automotive Engineers Flare (male)
Rp - "Metric" Threaded (female)
G - General close off actuator
H - High close off actuator

Table 3: Water Valve Sizing*

ΔΡ	1.0 Cv	1.5 Cv	2.5 Cv	3.0 Cv	3.5 Cv	4.0 Cv	5.0 Cv	7.5 Cv	8.0 Cv
1 PSI	1.0	1.5	2.5	3.0	3.5	4.0	5.0	7.5	8.0
2 PSI	1.4	2.1	3.5	4.2	4.9	5.7	7.1	10.6	11.3
3 PSI	1.7	2.6	4.3	5.2	6.1	6.9	8.7	13.0	13.9
4 PSI	2.0	3.0	5.0	6.0	7.0	8.0	10.0	15.0	16.0
5 PSI	2.2	3.4	5.6	6.7	7.8	8.9	11.2	16.8	17.9

* Water capacity in gallons per minute (GPM)

Erie™ PopTop, 2/3-Way VM SR/NSR Assembly Flow Patterns

Modulating Spring and Non-Spring Return PopTop, Two-Way and Three-Way VM Assemblies Flow Patterns

Piping

- The three-way is only configured as normally closed. For normally open configuration to the coil, turn the valve around. For proportional valves, set the control action (direct or reverse accordingly).
- The valve should be used in a closed-loop system.
- All valves must be piped so the plug closes against the direction of flow. For two-way valves, flow is from port B to port A. For normally closed three-way valves, B is the service port and A is the bypass port. For normally open three-way valves, A is the service port and B is the bypass port.
- Three-way VM valves must be piped in a mixing configuration, not diverting.

A CAUTION

RISK OF EQUIPMENT DAMAGE

Do not use VM series valves in "open" systems. Excess make-up water may cause damage to the valve.

Follow proper water treatment practices and system procedures. Refer to document F-26080; EN205, Water and Steam System Guidelines.

Failure to follow these instructions can result in equipment damage.

Note: Normally open actuators are not to be used on three-way valves to achieve normally open configurations. Use a normally closed actuator and pipe as shown in Figure-2.




Figure 1 Two-Way Valve Normally Closed.




Figure 2 Two-Way Valve Normally Open.




Figure 3 Three-Way Valve B Port Piped to Coil Outlet Normally Closed.




Figure 4 Three-Way Valve A Port Piped to Coil Outlet Normally Open



Erie™ PopTop, 2/3-Way VT/VS Two Position SR Assembly Flow Patterns

Two-Position Spring Return PopTop Two-Way and Three-Way VT/VS Assemblies Flow Patterns

The VT/VS series are two-position spring return valves. When powered, the actuator moves to the desired position, tensing the spring return system. When power is removed, the acutator returns to the normal position. The VT/VS series two-position spring return valves can be purchased with an optional built-in auxiliary SPDT end switch for interfacing or signaling; for example, zone pump burner




Figure 5 Two-Way Valve with Normally Closed Actuator.




Figure 6 Two-Way Valve with Normally Open Actuator.





Figure 7 Three-Way Valve in Mixing Configuration Figure 8 Three-Way Valve in Mixing Configuration Normally Closed to the Coil.



Normally Open to the Coil.




Figure 9 Three-Way Valve in Diverting Configuration Normally Closed to the Coil.




Figure 10 Three-Way Valve in Diverting Configuration Normally Open to the Coil.



Section 230900 – INSTRUMENTATION AND CONTROL FOR HVAC

2.15 ACTUATORS

A. Electronic Direct Couple Damper (and Valve) Actuators

[Schneider Electric SmartX Actuators]

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- Direct-coupled type non-hydraulic designed for minimum 100,000 full-stroke cycles at rated torque.
- Direct-coupled damper actuators must have a five-year warranty.
- 4. Size for torque required for damper seal at maximum design conditions and valve close-off pressure for system
- 5. Direct-coupled damper actuators should accommodate 3/8", ½" 1.05" round or 3/8"-½" and ¾" square damper
- Actuator operating temperature minimum requirements: 44, 88 and 133lb.-in. are -25°F-130°F (-32°C-55°C). The 30, 35, 60, 150 and 300lb. -in. are -25°F-140°F (-30°C-60°C). The 270lb. -in. are -22°F-122°F (-30°C-50°C).
- 7. Overload protected electronically throughout rotation except for selected Floating actuators they have a
- 8. Spring Return Actuators: Mechanical fail safe shall incorporate a spring return mechanism.
- Non-Spring Return Actuators shall stay in the position last commanded by the controller.
- 10. Power Requirements: 24Vac/dc [120Vac] [230Vac].
- 11. Proportional Actuator controller input range from 0-10Vdc, 2-10Vdc or 4-20mA models.
- 12. Housing: Minimum requirement NEMA type 2.
- 13. Actuators with a microprocessor should not be able to be modified by an outside source (cracked or hacked).
- 14. Actuators of 133 and 270lb.-in. of torque or more should be able to be tandem mount or "gang" mount.
- 15. Agency Listings: ISO9001, cULus, CE and CSA.

B. ½"-¾" Ball Valve Electronic Actuators

[Schneider Electric VBB/VBS ball valves actuators]

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- Size for torque required for valve close-off pressure for system design.
- Coupling: Direct coupled to the valve body without the use of external devices or tools (snap-on).
- 4. Auxiliary End Switch (optional) is to be SPST 24Vac/Vdc, 101mA to 5mA maximum on selected two-position
- 5. Controller Signal Two-position, Floating or Proportional (0-5 Vdc, 0-10 Vdc, 5-10 Vdc, or 4-20mA dc). The design allows for changing selections via DIP switches without removal of cover.
- Manual operating lever and position indicator must be and are on all models.
- Power Requirements: 24 Vac for floating, proportional, and 110–230 Vac for two position multi-voltage types.
- 8. Actuators must be available with either Spring Return (SR) or Non-Spring Return (NSR) models.
- 9. Operating Temperature Limit Floating is to be 32–140°F (0–60°C) Proportional 32–140°F (0–60°C) Two-Position 32-169°F (0-76°C).
- 10. Wiring (depending on model) Removable Terminal Block, 10 ft. (3.05 m) Plenum Cable, 18 in. (45cm) Appliance
- 11. Locations must be rated NEMA 2, IEC IP31 (Indoor Use Only). Actuators with terminal block or plenum cable leads are plenum rated per UL file number E9429.
- 12. Agency Listings: ISO9001, cULus, and CE.
- 13. Schneider Electric shall warrant all components for a period of 5 years from the date of production.

C. 2-Way (1/2"-3") and 3-Way (1/2"-2") Ball Valve Actuators

[Schneider Electric VB-2000 ball valves actuators]

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- 2. Size for torque required for valve close-off pressure for system design.
- 3. Actuators are to be available in spring return (SR) and non-spring return (NSR) models. Spring Return (SR) actuators are to provide a choice to return direction.
- 4. Actuators are to be available in models for two-position, floating and proportional control.
- 5. All actuator models are to be equipped with pigtail leads.
- 6. Actuators must be available in models with manual override.
- 7. Actuators must be available in models with auxiliary switch(es).
 8. Operating temperatures: Non-Spring Return (NSR) actuators with 44 and 88 lb.-in. of torque must be -25 to 130°F (-32 to 55°C). All other actuators are -22 to 140°F (-30 to 60°C).
- 9. Actuators must be NEMA 2 rated.
- 10. All actuators are to have a five-year warranty.
- 11. Agency Listings: ISO9001, cULus, and CE.



D. Zone Valve Actuators - Two-position Spring Return (SR)

[Schneider Electric Erie Zone Valve PopTop™ Two-position valve actuators]

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- 2. Valves are to be two-position (On-Off), spring return (SR) with general or high close off models.
- 3. Actuator Voltage Models are 24Vac@ 50/60Hz, 110Vac@ 50Hz and 120Vac@ 60Hz, 230Vac@ 50Hz, 240Vac@ 60Hz, 208Vac@ 50/60Hz, 277Vac@50/60Hz.
- End (auxiliary) Switch, 24 -240 Vac Models: 24-250 Vac/101 mA min. to 5 A max. and 9-30 Vdc @100 mA max.
- 5. Actuators are to have manual override on normally closed (NC) models and assembles to valves without the use of tools, linkages or calibration.
- 6. Actuators are to have a hysteresis synchronous motor.
- 7. North America Agency Listings: UL873: Underwriters laboratories (Category Temperature Indicating and Regulating Equipment). CUL: UL Listed for use in Canada by Underwriters Laboratory. Canadian Standards C22.2 No. 24.

E. 2"-18" 2-Way and 2"-16" 3-Way Butterfly Valve Non-Spring Return (NSR) Linear Electronic Valve Actuators with Linkage Butterfly Valve Actuators

[Schneider Electric S70 red w/ handwheel, w/ heater actuators]

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- 2. The butterfly valve actuators are to be Non-Spring Return (NSR) two-position and proportional taking 0–10 Vdc or 4-20 mA models. All actuators are to be NEMA 4, manual override (handwheel) two auxiliary switches, and
- Actuator close-offs and CVs must be appropriate for the valve size in a typical HVAC application.
 Actuators must be available in 24 Vac and 120 Vac models.
- 5. Actuators must have internal wiring isolation for parallel wiring multiple units that eliminates the risk of feedback from one actuator to another.
- 6. Proportional models must have feedback of 0–10 Vdc or 4–20 mA.
- 7. Actuator operating temperature shall be -40–150°F (-40–60°C).
- Actuator agency listings (North America) UL, CSA and CE.

F. 2"-4" 2-Way and 3-Way Butterfly Valve Spring Return (SR) Electronic Valve Actuators [Schneider Electric SmartXMx41-7153 actuators]

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- 2. The butterfly valve actuators are to be Spring Return (SR) two-position and proportional taking 2-10 Vdc or 4-20 mA models. All actuators are to be NEMA 2.
- 3. Actuator close-offs and CVs must be appropriate for the valve size in a typical HVAC application.
- 4. Actuators must be available in 24 Vac models.
- 5. Actuators shall have two SPDT auxiliary switch models.
- 6. Actuators must have internal wiring isolation for parallel wiring multiple units that eliminates the risk of feedback from one actuator to another.
- 7. Proportional models must have feedback of 2–10 Vdc or 4–20 mA.
- 8. Actuator operating temperature shall be -22-140°F (-12-60°C).
- 9. Actuators are to have a 5-year warranty.
- 10. Actuator agency listings (North America) UL, CSA and CE.

G. 2"-6" 2-Way and 3-Way Butterfly Valve Non-Spring Return (NSR) Electronic Valve Actuators [Schneider Electric SmartXNR-22xx-5xx actuators]

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- 2. The butterfly valve actuators are to be Non-Spring Return (NSR) two-position and proportional taking 0-10Vdc or 4-20mA models. All actuators are to be NEMA 2.
- 3. Actuator close-offs and CVs must be appropriate for the valve size in a typical HVAC application.
- 4. Actuators must be available in 24Vac models.
- 5. Actuators shall have two SPDT auxiliary switch actuators must have internal wiring isolation for parallel wiring multiple units that eliminates the risk of feedback from one actuator to another.
- 6. Proportional models must have feedback of 2-10 Vdc or 4-20 mA.
- Actuator operating temperature shall be -22-140°F (-12-60°C).
- 8. Actuators are to have a 5-year warranty.
- 9. Actuator agency listings (North America): UL, CSA and CE.



H. ½"-2" Bronze Body, Linear Electronic Valve Actuators with 67 or 78lbs. of force Globe Valve Actuators [Schneider Electric MG350V]

- 1. Manufactured, brand labeled and distributed by Schneider Electric.
- 2. Actuator must have bi-color LED status indication for motion indication, autocalibration and alarm notification.
- 3. When the actuator is properly mounted, it must have a minimum of a NEMA 2 (IP53) rating.
- 4. Actuators are to be non-spring return.
- 5. Actuators are to be floating (used for two-position) or proportional models.
- Proportional models will have optional models with a position output signal with field selectable 2–10 Vdc and 0-10 Vdc input signals and selectable input signal director reverse acting.
- 7. Actuator must have autocalibration which provides precise control by scaling the input signal to match the exact travel of the valve stem.
- 8. Actuators must come in models with Pulse Width Modulated (PWM) with field-selectable 0.59 to 2.93 sec and 0.1 to 25.5 sec input signal ranges with a position output signal.
- Actuators must have manual override with automatic release.
- 10. Models with position feedback output signal include field selectable 2-10Vdc or 0-5 Vdc output signal
- 11. Removable wiring screw terminal with ½" conduit opening.
- 12. Actuator operating temperature ranges:
 - a. When controlling fluid up to 266°F (130°C) = ambient air temperature is to be 23-131°F (-5-55°C).

 - b. Fluid up to $281^{\circ}F$ ($138^{\circ}C$) = $23-127^{\circ}F$ ($-5-53^{\circ}C$). c. Fluid up to $340^{\circ}F$ ($171^{\circ}C$) = $23-115^{\circ}F$ ($-5-46^{\circ}C$).
 - d. Fluid up to $400^{\circ}F$ ($204^{\circ}C$) = $23-102^{\circ}F$ ($-5-39^{\circ}C$).
- 13. Actuator agency Listings (North America).
 - a. cUL-us LISTED mark, per UL 60730-1 and -2-14 and CAN/CSA E60730-1 and -2-14 Automatic Electric Controls.
 - b. NEMA 2.
 - c. NEC class 2 FCC part-15 class B.
 - d. Canadian ICES-003.
 - e. ESA registered.
 - f. Plenum rated per UL2043.

I. 1/2"-2" Bronze Body, Linear Electronic Valve Actuators with 105lbs. of force Globe Valve Actuators [Schneider Electric SmartXMx51-7103 Series Linear SR Valve Actuator]

- 1. Manufactured, brand labeled and distributed by Schneider Electric.
- 2. Actuators must have Two-Position, Floating, and Proportional models.
- 3. Proportional models with a controller input signal of either 0–10Vdc, 2–10Vdc, 4–20mAdc, 0-3 Vdc, or 6-9 Vdc. Control function direct/reverse action is switch selectable on most models.
- 4. Actuator force is to be 105lb (467 newton) with ½" (13 mm) nominal linear stroke.
- 5. Power requirements 24 Vac, 120 Vac or 230 Vac depending on model.
- 6. Actuator housings rated for up to NEMA2/IP54.
- Actuator is to have overload protection throughout stroke.
 Actuator operating temperature -22-140°F (-30-60°C).
- 9. Actuator must automatically set input span to match valve travel.
- 10. Actuator must have manual override to allow positioning of valve and preload.
- 11. Actuator is to be spring return.
- 12. Actuator is to mount directly to valves without separate linkage.
- 13. Actuator is to have a 5-year warranty.
- 14. Actuator agency Listings (North America):
 - a. UL873: Underwriters Laboratories (File# E9429 Category Temperature-Indicating and Regulating
 - b. CUL: UL Listed for use in Canada by Underwriters Laboratories. Canadian Standards C22.2 No.24-93.

J. ½"-2" Bronze Body and other valves Linear Electronic Valve Actuators with 220 of force Globe Valve Actuators [Schneider Electric SmartXMx51-720x Series Linear SR Valve Actuator]

- 1. Manufactured, brand labeled and distributed by Schneider Electric.
- 2. Actuators must have Two-Position for a SPST controller, floating for a SPST controller, and proportional models with a controller input signal of either a 0-10 Vdc, 2-10 Vdc, 4-20 mAdc, or 6-9Vdc. Control function direct/ reverse action is jumper selectable.
- 3. Actuator is to be spring return.
- 4. Actuator will have 220 lb. force (979 newton) with ½" (13 mm) or 1" (25mm) nominal linear stroke.
- 5. Feedback on proportional model with 2-10 Vdc (max. 0.5 mA) output signal or to operate up to four additional slave actuators.
- Actuator operating temperature is 0–140°F (-18–60°C).
- Actuator must automatically set input span to match valve travel.
- 8. Actuator is to have a 24 Vac power supply on two-position and proportional models and 120 Vac on two-position
- 9. Actuator housings rated for up to NEMA2/IP54.
- 10. Actuator must have manual override to allow positioning of valve and preload.
- 11. Actuator is to mount directly to valves without separate linkage.
- 12. Actuator is to have a 5-year warranty.



- 13. Actuator agency Listings (North America):
 - a. UL873: Underwriters Laboratories (File #E9429 Category Temperature-Indicating and Regulating
 - b. CUL: UL Listed for use in Canada by Underwriters Laboratories. Canadian Standards C22.2 No.24-93.

K. ½"-2" Bronze Body, Spring Return (SR) Linear Electronic Valve Actuators with Linkage Globe Valve Actuators [Schneider Electric SmartX Actuators]

- Manufactured, brand labeled or distributed by Schneider Electric.
- 2. Actuators with 35, 60, 133, or 150lb.-in of force depending on model.
- 3. Actuator housings rated for up to NEMA 2/IP54 with a 150lb.-in. rated a NEMA 4.
- 4. Actuators are to be spring return.
- 5. Actuators are to have Two-position, Floating and Proportional models.
- 6. Actuators must have overload protection throughout rotation.
- Actuator are to have an optional built-in auxiliary switch to provide for interfacing or signaling on selected models.
- 8. Actuators are to have a 5-year warranty.
- 9. Actuator agency listings (North America):
 - a. UL-873 Underwriters Laboratories.
 - b. Canadian Standards C22- 2No.24-83, CUL.

L. ½"-2" Bronze Body, Spring Return (SR) Linear Electronic Globe Valve Actuators with Linkage. Non-Spring Return (NSR) Linear Valve Actuator with Linkage.

[Schneider Electric Forta M400A-VB, M800A-VB, M900A and M1500x-VB Screw Mounted on VentaVB-7000s]

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- 2. Actuators are to be either floating SPDT control or proportional control 0-10, 2-10 Vdc or 4-20mA with a 500ohm resistor included.
- 3. Actuators are to be direct/reverse with selectable DIP switches.
- 4. Actuators are to have 90 lb. (400N), 180 lb. (800N), or 337 lb. (1500N) of force on Non-Spring Return (NSR) models. Note: Not every actuator is for every valve.
- 5. Actuators are to be powered with 24 Vac or 24 Vdc.
- 6. All Non-Spring Return (NSR) actuators are to be NEMA 2, vertical mount only. Spring Return (SR) actuators are to have NEMA 4 models.
- 7. Actuators must have manual override to allow positioning of the valve.
- 8. Actuators must have selectable valve sequencing and flow curves of either equal percentage or linear.
- 9. Actuators must have feedback.
- 10. Actuators must have internal torque protection throughout stroke.
- 11. The operating temperature is to be:
 - a. 122°F (50°C) for chilled water applications.
 - b. 113°F (45°C) ambient at 281°F (138°C) fluid temperature.
 - c. 107°F (42°C) ambient at 300°F (149°C) fluid temperature.
 - d. 100°F (38°C) ambient at 340°F (171°C) fluid temperature.
- 12. 90°F (32°C) ambient at 366°F (186°C) fluid temperature.
- 13. Actuator agency listings (North America): UL873, cULus, RCM,CE.

M. 2½"-6" Cast Iron Flanged Globe Valve Body (and other valves) Non-Spring Return (NSR) Linear Electronic Valve Actuators with Linkage

[Schneider Electric Forta M800A and M1500A Tall U-Bolt Actuators]

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- 2. Actuators are to be either floating SPDT control or proportional control 0-10, 2-10 Vdc or 4-20mA with a 500ohm resistor included.
- 3. Actuators are to be direct/reverse acting with selectable DIP switch.
- 4. Actuators are to have 180 lb.(800N) or 337 lb.(1500N) of force.5. Actuators will need a 24 Vac or Vdc power supply.
- 6. Actuators are to be rated NEMA 2, vertical mount only.
- 7. Actuators must have manual override to allow positioning of the valve.
- 8. Actuators must have selectable valve sequencing and flow curves of either equal percentage to linear. A 2-10 Vac feedback.
- Actuators must have internal torque protection throughout stroke.
- 10. The operating temperature is to be:
 - a. 122°F (50°C)For chilled water applications.
 - b. 113°F (45°C) ambient at 281°F (138°C) fluid temperature.
 - c. 107°F (42°C) ambient at 300°F (149°C) fluid temperature.
 - d. 100°F (38°C) ambient at 340°F (171°C) fluid temperature.
- 11. 90°F (32°C) ambient at 366°F (186°C) fluid temperature.
- 12. Actuator agency listings (North America) UL873, cULus, RCM, CE.



N. 21/2"-6" Cast Iron Flanged Globe Valve Actuators 220lbs. force

- Actuators must have Two-Position for a SPST controller, Floating for a SPST controller, and Proportional models
 with a controller input signal of either a 0–10 Vdc, 2–10 Vdc, 4–20 mAdc, or 6–9Vdc. Control function direct/
 reverse action is jumper selectable.
- 2. Actuator is to be Spring Return.
- 3. Actuator will have 220 lb. force (979 newton) with ½" (13mm) or 1" (25 mm) nominal linear stroke.
- 4. Feedback on proportional model with 2–10 Vdc (max. 0.5 mA) output signal or to operate up to four additional slave actuators.
- 5. Actuator must automatically set input span to match valve travel.
- 6. Actuator operating temperature 0-140°F (-18-60°C) up to a maximum valve fluid temperature of 300°F (149°C).
- Actuator is to have a 24 Vac power supply on two-position and Proportional models and 120 Vac on two-position models
- 8. Actuator housings rated for up to NEMA2/IP54.
- 9. Actuator must have manual override to allow positioning of valve and preload.
- 10. Actuator is to mount directly to valves without separate linkage.
- 11. Actuator agency Listings: UL873, CUL: UL.

O. 2½"-6" Cast Iron Flanged Globe Valve Actuators with Linkage SR.

- 1. Actuators with 60, 133, or 150lb.-in of force depending on model.
- 2. Actuator housings rated for up to NEMA 2/ IP54 with a 150lb.-in. rated a NEMA 4.
- 3. Actuators are to be spring return.
- 4. Actuators are to have two-position, Floating and Proportional models.
- 5. Actuators must have overload protection throughout rotation.
- 6. Actuator have an optional built-in auxiliary switch to provide for interfacing or signaling on selected models.
- 7. Actuator agency listings: UL-873, C22-2 No.24-83, CUL.

P. Pneumatic Globe Valve Actuators

[Schneider Electric MK Series die-cast aluminum housing actuators]

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- 2. Pneumatic actuators must have field replaceable neoprene diaphragms.
- 3. All actuators shall be Spring Return (SR) with the spring retracting actuator shaft and raising the valve stem on loss of pressure.
- 4. Actuators must have an operating temperature of -20-220°F (-29-104°C).
- 5. Actuators shall be models with 6 sq.in. 11, 50 and 100sq. ineffective area for the psi to push against.
- 6. Actuators may not "spark" under normal conditions.
- 7. Actuators must accept an optional positive pilot positioning relay.
- 8. Actuators will have a maximum air pressure of 30 psig.
- 9. Actuators must have models with spring ranges for typical HVAC applications.

Q. Pneumatic Damper Actuators

[Schneider Electric MK-0000 die-cast aluminum housing actuators]

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- 2. Pneumatic actuators must have field replaceable neoprene diaphragms.
- 3. All actuators shall be Spring Return (SR) with the spring retracting actuator shaft on loss of pressure.
- 4. Actuators must have an operating temperature of -20–160°F (-29–71°C).
- 5. Actuators shall be models with 8 sq.in. 11, 20 and 40 sq.in. (dual mounted) effective area for the psi to push against.
- 6. Actuators may not "spark" under normal conditions.
- 7. Actuators must accept an optional positive pilot positioning relay. Relay is to be standard on 20 sq.in. models.
- 8. Actuators will have a maximum air pressure of 30 psig.
- 9. Actuators must have models with spring ranges for typical HVAC applications.

2.16 CONTROL VALVES

A. Zone Valves, Two-Position, Control Valves

[Schneider Electric Erie zone valves]

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- 2. Valve application are for hot and chilled water models, up to 50% glycol. Steam models up to 15 psi.
- 3. Valve seat leakage is to ANSI class IV (0.01%) with pressure at inlet (B-port/A-port, if 3-Way).
- 4. Valves are to be with Body 300 psi rated forged brass, Stem-nickel plated, Seat-brass, Paddle-BunaN or highly saturated nitrile.
- Valves are to be 2-Way or 3-Way with connections options of NPT (threaded female), Sweat (SW), Inverted flare (IFL), Society Automotive Engineers male (SAE) Rp Metric threaded female, depending on models, with end switch option on general temperature models.



- 6. Actuators are to be Spring Return (SR) normally open (NO) and normally closed (NC) models. Actuators are to have "High Close-off" models.
- 7. Valve line sizes are ¾", ½", ¾", 1", and 1¼" depending on model.
- 8. Valve CVs are from 1 to 8 depending on model.
- 9. Actuators are to be UL listed.

B. Bronze1/2"-2" Globe Control Valves

[Schneider Electric Venta VB-7000valves]

- Control Valves: Factory fabricated, with body material, and pressure class based on maximum pressure and temperature rating of piping system with a body rating of not less than 400 psig at 150°F, 321 psig at 281°F per ANSI R16.15
- 2. Valve Manufacturer: Must have at least 25 years of valve manufacturing and must meet the provisions of Section 1605 of the American Recovery and Reinvestment Act Buy American Requirements. Manufacturer shall water test all valves prior to shipment.
- 3. Valves 2-Way NPS 2" and Smaller: Operator, stem and plug assembly, and spring-loaded PTFE/EPDM valve stem packing cartridge must be removable for future replacement to restore the valves back to their original condition. Material grade properties must meet the fluid temperature and pressure requirements:
 - a. Standard duty bronze body, 316 stainless steel vertical stem, brass plug, soft seal, and bronze seat, renewable packing cartridge, and screwed/sweat/flared ends. Valves shall have allowable media temperature of 20°F 281°F to assure reliability with dual temperature applications.
 - b. Heavy duty bronze body, 316 stainless steel vertical stem, 316 stainless steel plug, soft seal, and 316 stainless steel seat, renewable packing cartridge, and screwed ends. Valves shall have allowable media temperature of 20°F 340°F to assure reliability with dual temperature applications.
 - c. High temperature bronze body, 316 stainless steel vertical stem, 316 stainless steel plug, and 316 stainless steel seat, renewable packing cartridge, and screwed ends. Valves shall have allowable media temperature of $20^{\circ}F 400^{\circ}F$.
- 4. 2-Way fluid system globe valves shall have the following characteristics:
 - a. Rangeability: Greater than 100:1 for all valves with flow coefficients of 0.4 and higher to provide stable control under light load conditions.
 - b. Maximum Allowable Seat Leakage: Standard and heavy duty valves must be designed to meet ANSI Class V (0.0005 ml per minute per orifice diameter per psi differential) up to 35 psi close off differential pressure and ANSI Class IV seat leakage (maximum 0.01% of full open valve capacity) above 35 psi with appropriate actuator. High temperature valves must meet ANSI Class III seat leakage (maximum 0.1% of full open valve capacity).
 - c. The valve must be able to operate with a full-open operating differential of no less than 87 psi.
 - d. Flow Characteristics: Modified equal percentage characteristics for standard duty water applications and modified linear for heavy duty and high temperatures team applications with gradual opening for light loads. e. Sizing:
 - Two Position Water: Line size or size using a differential pressure of 1 psi.
 - Modulating Water: 5PSI or twice the load pressure drop.
 - Pressure drop across steam valve at a maximum flow of 80 percent of inlet pressure up to 15psig and 42% of absolute (gage pressure +14.7) inlet pressure above 15 psig inlet.
 - 100 psi saturated steam maximum inlet pressure for heavy duty bronze body globe valves ½"-2".
 - 150 psi saturated steam maximum inlet pressure for high temperature bronze body globe valves ½"-2".
 - 35 psi saturated steam maximum inlet pressure for standard duty bronze body globe valves ½"-2".
- 5. Valves 3-Way mixing (two inlets and one outlet) NPS2" and smaller:
 - a. Operator, stem and plug assembly, and spring-loaded PTFE/EPDM valve stem packing cartridge must be removable for future replacement to restore the valves back to their original condition. Material grade properties must meet the fluid temperature and pressure requirements:
 - Standard duty bronze body, 316 stainless steel vertical stem, brass plug, and bronze seat, renewable packing cartridge, and screwed or sweat ends. Valves shall have allowable media temperature of 20°F – 281°F to assure reliability with dual temperature applications.
 - Heavy duty bronze body, 316 stainless steel vertical stem, 316 stainless steel plug, and 316 stainless steel seat, renewable disc and packing cartridge, and screwed ends. Valves shall have allowable media temperature of 20°F 340°F to assure reliability with dual temperature applications.
- 6. 3-Way mixing hydronic system globe valves shall have the following characteristics:
 - Rangeability: Greater than 100:1 for all valves to provide stability.
 - Maximum Allowable Seat Leakage: A port must be designed to meet ANSI Class V (0.0005ml per minute per orifice diameter per psi differential) up to 35 psi close off differential pressure and ANSI IV seat leakage (maximum 0.01% of full open valve capacity) above 35 psi with appropriate actuator. B port must meet ANSI Class III seat leakage (maximum 0.1% of full open valve capacity).
 - The valve must be able to operate with a full-open operating differential of 87 psi.
 - Flow Characteristics: Modified linear characteristics with gradual opening for light loads.
 - Sizing: Modulating Water: Minimum 5 psi or at least equal to the load pressure drop.
- 7. Valves 3-Way diverting (one inlet and two outlets) NPS2 and smaller:
 - Operator, stem and plug assembly, and spring-loaded PTFE/EPDM valve stem packing cartridge must



be removable for future replacement to restore the valves back to their original condition. Valves must be designed specifically for diverting service and mixing valves designed for mixing service must not be used for diverting applications. Material grade properties must meet the fluid temperature and pressure requirements: Standard duty bronze body, 316 stainless steel vertical stem, brass plug, and bronze seat, renewable disc and packing cartridge, and screwed ends. Valves shall have allowable media temperature of $20^{\circ}\text{F} - 281^{\circ}\text{F}$ to assure reliability with dual temperature applications.

- 8. 3-Way diverting hydronic system globe valves shall have the following characteristics:
 - Rangeability: Greater than 100:1 for all valves to provide stable control under light load conditions.
 - Maximum Allowable Seat Leakage: ANSI Class III seat leakage (maximum 0.1% of full open valve capacity).
 - Maximum Allowable Pressure Differential: 35 psi in. an open position.
 - Flow Characteristics: Modified linear characteristics with gradual opening for light loads.
 - Sizing: Modulating Water: Minimum 5 psi or at least equal to the load pressure drop.
- 9. Required Certifications:
 - Pressure Equipment Directive (PED97/23/EC), RoHS (Restriction of Hazardous Substances) and REACH (Regulation, Evaluation, Authorization, and Restriction of Chemicals), Canadian Registration Number.
- 10. Valve and Operator:
 - To assure maximum performance and operation of the valve assembly, both the valve and the actuator
 must be tested and approved by the valve manufacturer to assure compatibility of all components and
 performance to the specifications.

C. 2"-6" Cast Iron Flanged Valves

[Schneider Electric VB-8000 and VB-9000 valves]

- 1. Bodies
 - Shall be American Factory fabricated with ASTMA 126 Class B cast iron body material with the pressure class within the maximum pressure and temperature rating of the piping system (125 body rating with not less than 200 psig at 150°F, decreasing to 169 psig at 281F per ANSA B16.1).
- Manufacturer
 - Shall have at least 25 years of valve manufacturing and meet the provisions of Section 1605 of the American Recovery and Reinvestment Act, buy American, requirements. All valves shall be water tested by manufacturer prior to shipment.
- 3. Serviceability
 - 2-Way valve operators, stem and plug assemblies, and spring-loaded PTFE/EPDM valve stem packing cartridges must be removable for future replacement to restore the valves back to their original condition.
- 4. Construction
 - a. Material grades must meet the fluid temperature and pressure requirement temperatures of $20^{\circ}F 281^{\circ}F$ to assure reliability throughout all application temperature ranges.
- 5. Packings
 - Shall be cartridges suitable for replacement as units with standing the full operating temperature ranges, including daily and seasonal fluctuations of water, 60% glycol and steam fluids.
- 6. Characteristics
 - Rangeability: 2-Way, 100:1 and greater for stable control under light load.
 - Shutoff, 2-Way: Leakage allowed: ANSI Class IV (0.01% of max flow).
 - 3-Way: Leakage allowed: ANSI Class III (0.1% of max flow).
 - Flow curves: 2-Way modified equal percentage characteristic.
 - Mixing and Diverting: Linear, modified with gradual opening for light loads.
- 7. Piping
 - Diverting valves with the common port at the bottom can be used for mixing.
 - Mixing valves with the common port at the end must not be used for diverting applications.
- 8. Sizing
 - Two Position Water: Line size or size using a differential pressure of 1 psi.
 - Modulating Water: 5PSI or twice the load pressure drop.
 - Steam, 2-Way: maximum pressure drop across the valve at a maximum flow of 80 percent of inlet pressure up to 15 psig. Above 15 psig inlet, 42% of absolute (gage pressure +14.7) inlet pressure.
- 9. Certifications for All Models
 - Pressure Equipment Directive (PED97/23/EC), RoHS (Restriction of Hazardous Substances) and REACH (Regulation, Evaluation, Authorization, and Restriction of Chemicals.

D. Steam Control Valves

- 1. ½"...2" Steam Service Designed Globe Valves
 - a. Body material, and pressure class based on maximum pressure and temperature rating of piping sys-



- tem with a body rating of not less than 400 psig at 150°F, 321 psig at 281°F per ANSI B16.15.
- b. High temperature spring-loaded PTFE/EPDM valve stem packing cartridge must be removable for future replacement to restore the valves back to their original condition. Material grade properties must meet the fluid temperature and pressure requirements:
 - Standard duty bronze body, 316 stainless steel vertical stem, brass plug, soft seal, and bronze seat, renewable packing cartridge, and screwed/sweat/flared ends. Valves shall have allowable media temperature of 20°F ...281°F to assure reliability with dual temperature applications.
 - Heavy duty bronze body, 316 stainless steel vertical stem, 316 stainless steel plug, soft seal, and 316 stainless steel seat, renewable packing cartridge, and screwed ends. Valves shall have allowable media temperature of 20°F ...340°F to assure reliability with dual temperature applications.
 - High temperature bronze body, 316 stainless steel vertical stem, 316 stainless steel plug, and 316 stainless steel seat, renewable packing cartridge, and screwed ends. Valves shall have allowable media temperature of 20°F ...400°F.
- c. 2-Way fluid system globe valves shall have the following characteristics:
 - Rangeability: Greater than 100:1 for all valves with flow coefficients of 0.4 and higher to provide stable control under light load conditions.
 - Maximum Allowable Seat Leakage: Standard and heavy duty valves must be designed to meet
 ANSI Class V (0.0005 ml per minute per orifice diameter per psi differential) up to 35 psi close
 off differential pressure and ANSI Class IV seat leakage (maximum 0.01% of full open valve
 capacity) above 35 psi with appropriate actuator. High temperature valves must meet ANSI Class
 III seat leakage (maximum 0.1% of full open valve capacity).
 - The valve must be able to operate with a full-open operating differential of no less than 87 psi.
 - Flow Characteristics: Modified equal percentage characteristics for standard duty water applications and modified linear for heavy duty and high temperature steam applications with gradual opening for light loads.
 - Sizing:
 - a. Pressure drop across steam valve at a maximum flow of 80 percent of inlet pressure up to 15 psig and 42% of absolute (gage pressure + 14.7) inlet pressure above 15 psig inlet.
 - b. 100 psi saturated steam maximum inlet pressure for heavy duty bronze body globe valves ½"...2".
 - c. 150 psi saturated steam maximum inlet pressure for high temperature bronze body globe valves ½"...2".
 - d. 35 psi saturated steam maximum inlet pressure for standard duty bronze body globe valves ½"...2".
 - Certifications for all models: Pressure Equipment Directive (PED 97/23/EC), RoHS (Restriction of Hazardous Substances) and REACH (Regulation, Evaluation, Authorization, and Restriction of Chemicals
- 2. 2½"...6" Steam Service Designed Globe Valves
 - a. Bodies: Shall be American Factory fabricated with ASTM A 126 Class B cast iron body material with the pressure class within the maximum pressure and temperature rating of the piping system. (125 body rating with not less than 200 psig at 150°F, decreasing to 169 psig at 281°F per ANSA B16.1)
 - Serviceability: 2-Way valve operators, stem and plug assemblies and spring-loaded PTFE/EPDM valve stem packing cartridges must be removable for future replacement to restore the valves back to their original condition.
 - Construction: Material grades must meet the fluid temperature and pressure requirement temperatures
 of 20 °F ...281 °F to assure reliability throughout all application temperature ranges.
 - d. Packings: Shall be cartridges suitable for replacement as units withstanding the full operating temperature ranges, including daily and seasonal fluctuations of water, 60% glycol and steam fluids.
 - e. Characteristics:
 - Rangeability: 2-Way, 100:1 and greater for stable control under light load.
 - Shutoff, 2-Way: Leakage allowed: ANSI Class IV (0.01% of max flow)
 - Flow curves: 2-Way modified equal percentage characteristic.
 - Sizing
 - Steam, 2-Way: Maximum pressure drop across the valve at a maximum flow of 80 percent of inlet pressure up to 15 psig. Above 15 psig inlet, 42% of absolute (gage pressure + 14.7) inlet pressure.
 - Certifications for All Models: Pressure Equipment Directive (PED 97/23/EC), RoHS (Restriction of Hazardous Substances) and REACH (Regulation, Evaluation, Authorization, and Restriction of Chemicals).

E. 1/2"-3/4" Ball Valve

[Schneider Electric VBB/VBS Ball Valves]

1. Manufactured, brand labeled or distributed by Schneider Electric.



- 2. ½" and ¾" Ball Valves: Forged brass body rated at no less than 600 psi, chrome plated brass ball with blowout proof stem or optional stainless steel ball with blow out proof stem.
- Valves are to be in 2-Way and 3-Way configurations.
- 4. Connection: Female NPT end fittings, Teflon® PTFE seat, characterizing disc glass-filled PEEK providing equal percentage flow curve on 2-Way valve.
- 5. Operating Temperature 20–250°F chilled or hot water with up to 60% glycol solution.
- 6. 2-Way and Bypass port should be ANSI Class IV (0.01% of Cv) seat leakage.
- Rangeability must be at least 300:1.
- Tool-free actuator connection.
- System Static Pressure Limit should be 600 psig (4137Pa).
- 10. The manufacturer shall warrant all components for a period of 2 years from the date of production.

F. 2-Way (1/2"-3") and 3-Way (1/2"-2") Ball Valves

[Schneider Electric VB-2000 series]

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- 2. Valves must be for control of hot or chilled water, or solutions of up to 50% glycol.
- 3. Ball valves must have close-offs of 40–130psi depending on size.
- 4. Valves will provide Cvs from 0.33–266 depending on size.
 5. Valve characterizing insert is to be made of glass-filled Noryl™ and provide equal percentage flow.
 6. Valve characterizing insert is to be made of glass-filled Noryl™ and provide equal percentage flow.
- Valve body is to be made of forged brass ASTM B283-06 and rated for static pressure of 360 psi at fluid temperatures of 20-250 °F (-7-121 °C).
- 7. All valves are to have balls made of nickel/chromium plated brass with 2-Way valves having stainless steel balls as an option. All valve stems are to be stainless steel with reinforce Teflon® EPDMO-ring seals.
- 2-Way valves are to be ANSI Class IV (0.01% of Cv) shutoff. 3-Way valves are to be ANSI Class IV (0.01% of Cv piped coil-side outlet to the port A only.
- Fluid (water) temperature are a minimum 20°F (-7°C) and a maximum of 250°F (121 °C).
- 10. Valves will have a two year warranty.

G. Pressure Independent Balancing Control Valves ½"-10"

[Schneider Electric SmartX PIBCV]

When selecting pressure independent valves the specifier should also revise section 232113 to NOT include balancing valves and also modify section 230593 to NOT require the individual balancing of each coil/valve

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- NPS2 and Smaller: PN16, stainless steel components.
- 3. NPS 2½ through 10: Class 125 cast iron body per ASME B16.1-2010, Material class B per ASTM A126-04 (2014), stainless steel components.
- 4. Accuracy NPS¾" and Smaller: The control valves shall accurately control the flow from 0-100% rated flow with a differential pressure range of 2.32–58 psi for low and standard flow units, 5–58 psi for high flow units within 5% offset flow value.
- 5. Accuracy NPS 1 through 11/4: The control valves shall accurately control the flow from 0-100% rated flow with a differential pressure range of 2.9-58 psi for standard flow units, 5-58 psi for high flow units within 5% of set flow
- 6. Accuracy NPS 1½ through 4: The control valves shall accurately control the flow from 0-100% rated flow with a differential pressure range of 4.35-58 psi for standard flow units, 8.7 psi to 58 psi for high flow units within 5% of
- 7. Accuracy NPS 5 through 10: The control valves shall accurately control the flow from 0-100% rated flow with a differential pressure range of 5.8-58 psi for standard flow units, 8.7-58 psi for high flow units within 5% of set
- 8. Flow Characteristics: Linear Control, selectable to equal percentage at the proportional valve actuator.
- Field adjustable flow by means of a percentage of rated valve flow.
- 10. Position feedback output signal integrated into all proportional actuators.
- 11. 100% authority with modulating below 1% regardless of flow settings.
- 12. No cartridges requiring replace mentor maintenance.
- 13. Close off ratings shall be 232 psi for all valve sizes.

H. Butterfly Valves

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- 2. Valve body are to be polyester coated iron ASTMA 126 lug mating with ANSI class 125/150 flanges.
- 3. Disc Type: Ductile iron nylon 11 coated.
- 4. Valve Stem:
 - a. 2-8" 416 stainless steel double D stem.
 - b. 10-12" 316 stainless steel double D stem.
 - c. 14" and larger: stainless steel round shaft woodruff key slot.
- - a. EPDM tongue and groove seat and molded O-ring flange seat.
- 6. Flow Characteristics: Modified equal percentage.
- Close-Off Pressure Rating: Bubble-tight shutoff (no leakage).
- Valve Fluid Temperature Rating: -40-250°F (-40-121°C).
- 9. Valve will have two (2) inch extended neck (because of heat).



- 10. Valve must accept pneumatic or electric/electronic actuators.
- 11. Valves must have a minimum of a two (2) year warranty.

I. High Performance Butterfly Valves

- 1. Manufactured, brand labeled or distributed by Schneider Electric.
- 2. Valve body are to be in carbon steel with ANSI class 150 flanges.
- 3. Disc Type: 316 stainless steel.
 - a. Valve Stem: 17-4PH stainless steel.
 - b. One-piece design.
 - c. Blowout proof design.
- Valve Seat:
 - a. Resilient energizer totally encapsulated by the PTFE seat.
 - b. Seat assembly locked in the body recess by full-faced seat retainer.
 - c. Self adjusting for temperature changes and wear.
- 5. Flow Characteristics: Modified equal percentage.
- 6. Close-Off Pressure Rating: Bubble-tight shut off (no leakage) at rated maximum differential pressure.
- 7. Valve Fluid Temperature:
 - a. 40-500°F (-40-250°C).
 - b. On/Off steam application max.150 psi pressure.
 - c. Proportional steam application max.50 psi pressure.
- 8. Valve will have extended neck (because of heat).
- 9. Valve must accept pneumatic or electric/electronic actuators.
- 10. Valve must have a minimum two (2) year warranty.





