
PSS/PS/PSM/FB/FS Series

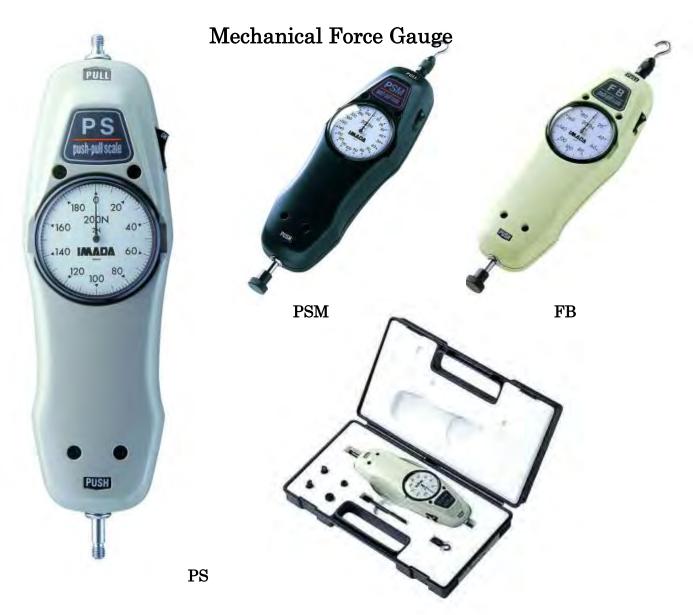

[Application]

Measuring of the contact pressure for touch panel or keyboard

Measuring of the bonding strength of adhesive tapes and the peel strength of adhesive sheets

*Digital force gauges are more suitable for measuring rapid change of the force such as impact test

[Feature]

All models are equipped with Peak Hold function which captures peak force.

Zero adjustment function for tare weight allows the adjustments of attachment's weight.



[PSS/PS/PSM/FS/FB Series Specification]

Model	PSS	PS	PSM	FS	FB
Stroke		10 mm			
Measuring units		Refer t	to the following	tables	
Display features		Track and peak mode (Selectable)			
Graduation	100 l	100 lines* 200 lines **		100lines *	
Accuracy	+/-0.1% of F.S			+/-0.3%	6 of F.S
Operating	From 0 to +40 degree Celsius				
temperature range					
Weight (approx.)	580g***	670g***	660g***	580g***	630g***
	(PSS-10N) (PS-500N) (PSM-300N)		(FS-10N)	(FB-100N)	
Accessories	8 attachments			6 attach	ments
	Carrying case		Carryin	ng case	

^{* 120} lines for 3K, 30K, 300N, 30lb, 300K, 300N, 300lb.

^{** 150} lines for 3K, 30K.

^{***}As the weight differs depending on its capacity, the above is just of main model numbers.

[PSS/PS/PSM/FS/FB available models]

1. PPS/PS Series: Highly Accurate, Durable Standard Model PS Series [N unit graduation: 100 lines *120 lines]

Model	Capacity	Resolution
PS-5N	5 N	0.05 N
PS-10N	10 N	0.1 N
PS-20N	20 N	0.2 N
PS-30N *	30 N	0.25 N
PS-50N	50 N	0.5 N
PS-100N	100 N	1 N
PS-200N	200 N	2 N
PS-300N *	300 N	2.5 N
PS-500N	500 N	5 N

PSS Series [Kgf unit graduation: 100 lines *120 lines] Note 1)

Model	Capacity	Resolution
PSS-0.5K	500 gf	5 gf
PSS-1K	1 kgf	10 gf
PSS-2K	2 kgf	20~ m gf
PSS-3K *	3 kgf	25 gf

PS Series [Kgf unit graduation: 100 lines *120 lines] Note 1)

Model	Capacity	Resolution
PS-5K	5 kgf	50 gf
PS-10K	10 kgf	100 gf
PS-20K	20 kgf	200 gf
PS-30K *	30 kgf	250 gf
PS-50K	50 kgf	500 gf

PS Series [lbf unit graduation: 100 lines *120 lines] Note 1)

Model	Capacity	Resolution
PS-5lb	5 lbf	0.05 lbf
PS-10lb	10 lbf	0.1 lbf
PS-20lb	20 lbf	0.2 lbf
PS-30lb *	30 lbf	0.25 lbf
PS-50lb	50 lbf	0.5 lbf
PS-100lb	100 lbf	1 lbf

Note 1) Prohibited to sell Japanese market due to Japanese Measurement standard law.



2. PSM Series: High-Resolution Scale Precision Type PSM Series [N unit graduation: 200 lines **150 lines]

Model Capacity Resolution PSM-20N 20 N 0.1 N PSM-30N ** 30 N 0.2 N 0.25 N PSM-50N 50 N **PSM-100N** 100 N 0.5 N **PSM-200N** 200 N 1 N PSM-300N ** 300 N 2 N

PSM Series [kgf unit graduation: 200lines **150 lines] Note 1)

500 N

2.5 N

Model	Capacity	Resolution
PSM-2K	2 kgf	10 gf
PSM-3K	3 kgf	20 gf
PSM-5K	5 kgf	25 gf
PSM-10K	10 kgf	50 gf
PSM-20K	20 kgf	100 gf
PSM-30K **	30 kgf	200 gf
PSM-50K	50 kgf	250 gf

Note 1) Prohibited to sell Japanese market due to Japanese Measurement standard law.

PSM-500N

3. FB/FS Series: Steady Accuracy, Affordable Price Popular Type FB Series [N unit graduation: 100 lines*120 lines]

Model	Capacity	Resolution
FB-10N	10 N	0.1 N
FB-20N	20 N	0.2 N
FB-30N *	30 N	0.25 N
FB-50N	50 N	0.5 N
FB-100N	100 N	1 N
FB-200N	200 N	2 N
FB-300N *	300 N	2.5 N
FB-500N	500 N	5 N

FS Series [kgf unit graduation: 100 lines *120 lines] Note 1)

Model	Capacity	Resolution
FS-1K	1 kgf	10 gf
FS-2K	2 kgf	20 gf
FS-3K *	3 kgf	25 gf

FS Series [kgf unit graduation: 100 lines *120 lines] Note 1)


Model	Capacity	Resolution
FB-5K	5 kgf	50 gf
FB-10K	10 kgf	100 gf
FB-20K	20 kgf	200 gf
FB-30K *	30 kgf	250 gf
FB-50K	50 kgf	500 gf

FB Series [lbf unit graduation: 100 lines *120 lines] Note 1)

Model	Capacity	Resolution
FB-5lb	5 lbf	0.05 lbf
FB-10lb	10 lbf	0.1 lbf
FB-20lb	20 lbf	0.2 lbf
FB-30lb *	30 lbf	0.25 lbf
FB-50lb	50 lbf	0.5 lbf
FB-100lb	100 lbf	1 lbf

Note 1) Prohibited to sell Japanese market due to Japanese Measurement standard law.

[Dimension]

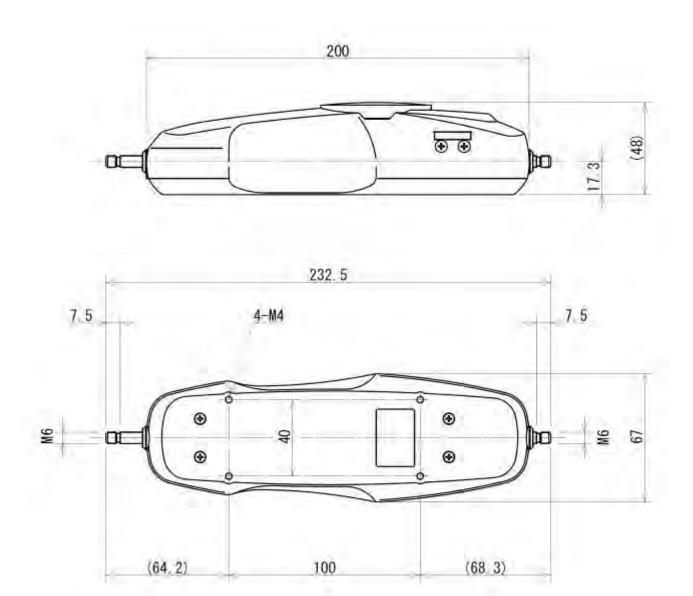

[Caution]

- *Do not apply excess force, torque, or impact on the measuring shaft.
- *Do not use the gauge under the condition of the rapid temperature changes, high temperature, high humidity, near water and dusty place.
- *Keep the gauge in the exclusive carrying case when it is not used.
- *The use of the test stand made by Imada is recommended for the stable measuring result.
- *All information is subject to change without prior notice.

