

# Data Sheet

## Single Output Programmable DC Power Supplies Models 9120A, 9121A, 9122A, 9123A & 9124

B&K Precision® models 9120A, 9121A, 9122A, 9123A and 9124 are laboratory grade Programmable DC Power Supplies providing great performance and features not found in other supplies in this price category. The 9120 series are designed to meet the needs of today's applications in R&D design verification, production testing or university labs that require clean and reliable power, high resolution and accuracy and fast transient response time.

- Excellent display resolution
- Low ripple and low noise
- Outstanding temperature stability
- Fast transient response time (< 150 μs)
- SCPI compatible
- Front and Rear Output Terminals
- Closed case calibration
- Compact size for bench use or rack mountable (2U x 1/2U size)
- List mode operation for increased throughput. Download and execute command sequences from non-volatile memory


### Front Panel Operation

The numeric keys and rotary knob provide a convenient interface for setting output levels quickly and precisely. Voltage and Current can be set to a maximum resolution of 0.5mV (2mV for 9124) and 0.1mA respectively. Up to 50 parameters can be stored and recalled from internal memory.



9124

	models				
	9120A	9121A	9122A	9123A	9124
Output Voltage	0-32V	0-20V	0-60V	0-30V	0-72V
Output Current	0-3A	0-5A	0-2.5A	0-5A	0-1.2A

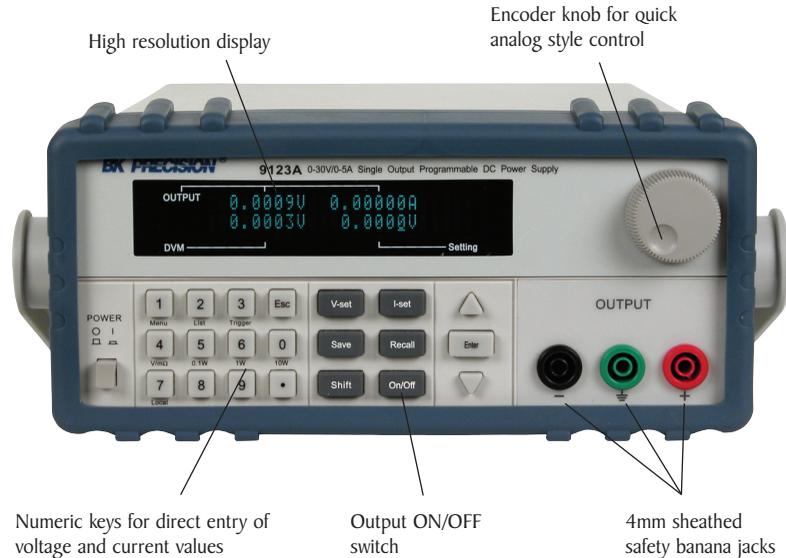

**Single Output Programmable DC Power Supplies**  
**Models 9120A, 9121A, 9122A, 9123A & 9124**

**Remote Interface**

The power supplies can be remotely controlled from any PC with USB or RS232 interface, allowing the user to program and monitor all parameters through easy to use SCPI commands. The power supplies come with a RS232 to TTL serial converter cable and a USB to TTL serial converter cable. Additionally, model 9123A can be controlled via GPIB interface and includes a GPIB to TTL conversion adapter cable.

**Extra Features**

The 9120 series' digital port offers a variety of configurations. The port can operate in Digital I/O, external Trigger and DFI/RI (Discrete Fault Indicator/Remote Inhibit) mode. The RI feature can be used for turning several power supplies On/Off simultaneously. External triggering can be used in combination with List mode.

The included Application Software supports front panel emulation and allows users to generate simple test sequences without the need to write source code.

Additionally, the power supply comes with a built-in 5 1/2 digit DVM and high resolution milliohm meter supporting 4 wire measurements.

**Specifications**


	<b>models</b>				
	<b>9120A</b>	<b>9121A</b>	<b>9122A</b>	<b>9123A</b>	<b>9124</b>
Output Ratings (0 °C~40 °C)	0 ~32V 0~3A	0 ~20V 0~5A	0 ~60V 0~2.5A	0 ~30V 0~5A	0~72V 0~1.2A
Load Regulation ±(%of output+offset)	<0.01%+2mV <0.05%+1mA		<0.01%+2mV <0.05%+0.5mA	<0.01%+2mV <0.05%+1.5mA	<0.01%+2mV <0.05%+0.3mA
Line Regulation ±(%of output+offset)	<0.01%+1mV <0.05%+0.1mA		<0.01%+2mV ≤ 0.05%+0.05mA	<0.01%+1mV ≤ 0.05%+0.1mA	<0.01%+1mV ≤ 0.05%+0.5mA
Programming resolution	0.5mV 0.1mA		1mV 0.1mA	0.5mV 0.1mA	2mV 0.02mA
Readback/ Meter resolution	0.1mV 0.01mA	0.1mV 0.05mA	0.5mV 0.05mA	0.1mV 0.05mA	0.5mV 0.01mA
Front panel setting resolution	0.5mV 0.1mA		1mV 0.1mA	0.5mV 0.1mA	2mV 0.02mA
Programming accuracy, 12months (25 °C ± 5 °C) ±(%of output+offset)	<0.03%+3mV <0.05%+2mA		≤ 0.03%+6mV ≤ 0.05%+1.5mA	≤ 0.03%+3mV ≤ 0.05%+2.5mA	≤ 0.03%+6mV ≤ 0.05%+1mA
Readback/ Meter accuracy 12months (25 °C ± 5 °C) ±(%of output+offset)	<0.02%+3mV <0.05%+2mA		≤ 0.02%+6mV ≤ 0.05%+1.5mA	≤ 0.02%+2.5mV ≤ 0.05%+2.5mA	≤ 0.02%+5mV ≤ 0.05%+1mA
Ripple & Noise (20Hz ~20MHz)	≤ 4mVp-p ≤ 3mA <sub>rms</sub>	≤ 3mVp-p ≤ 3mA <sub>rms</sub>	≤ 5mVp-p ≤ 3mA <sub>rms</sub>	≤ 4mVp-p ≤ 4mA <sub>rms</sub>	≤ 5mVp-p ≤ 3mA <sub>rms</sub>
Temperature coefficient, (0 °C~40 °C) ±(% of output+offset)	<0.02%+3mV <0.05%+2mA		≤ 0.02%+6mV <0.05%+1mA	≤ 0.02%+3mV <0.05%+2mA	≤ 0.02%+5mV <0.05%+0.5mA
Readback temperature coefficient, ±(% of output+offset)	<0.02%+3mV <0.05%+2mA		≤ 0.02%+6mV ≤ 0.05%+1mA	≤ 0.02%+3mV ≤ 0.05%+2mA	≤ 0.02%+5mV ≤ 0.05%+0.5mA
Transient Response	< 150 μs for output to recover to within 75 mV following a change from 100 mA to 1 A				
DVM Accuracy	0~12V range: 0.02%+2mV 0~40V range: 0.02%+3mV				
DVM Resolution	0~12V range: 0.1mV 0~40V range: 1mV				
Milliohm Meter Accuracy	0.1% (for Voltage and Current ≥ 10% of full scale) 0.3% (for Voltage and Current ≥ 3% of full scale)				
State Storage Memory	50 user configurable memory locations				
Operating Temperature	0 to 40 °C, <75% R.H.				
Storage Temperature	-20 to 70 °C, <85% R.H.				
Power Requirements	115V/220VAC ± 10%, 47 to 63Hz				
Weight	19.8 lbs. (9 kg)		21.2 lbs. (9.6 kg)		19.8 lbs. (9 kg)
Dimensions	8.45in(W) x 3.8in(H) x 13.9in(D) 214.5mm(W) x 88.2mm (H) x 354.6mm (D)				

**Three Year Warranty**

Included Accessories: User manual, power line cord, IT-E131 RS232 to TTL serial converter cable, IT-E132 USB to TTL serial converter cable, software installation disk, and certificate of calibration. Model 9123A also includes IT-E135 GPIB to TTL conversion adapter cable. Optional: IT-E151 rack mount kit.



The 9120 series uses 4mm sheathed banana jacks that accept sheathed or shrouded banana plugs and meet the latest international safety standards.

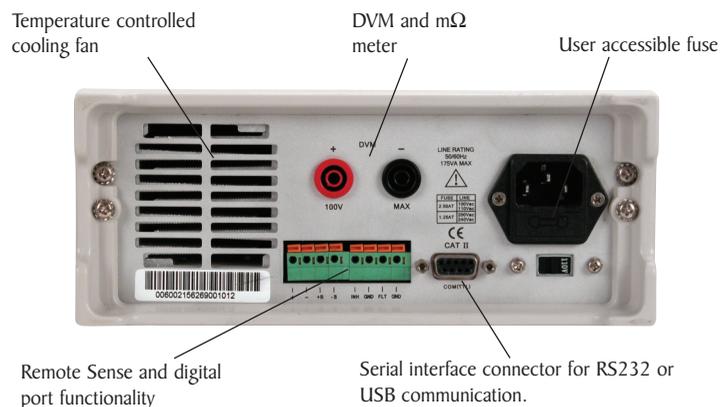

Serial interface connector for RS232 or USB communication. Model 9123A also supports control via GPIB interface.