


920CL

FIBER OPTIC CLEAVER

Fast, Accurate and Reliable Fiber Cleaving

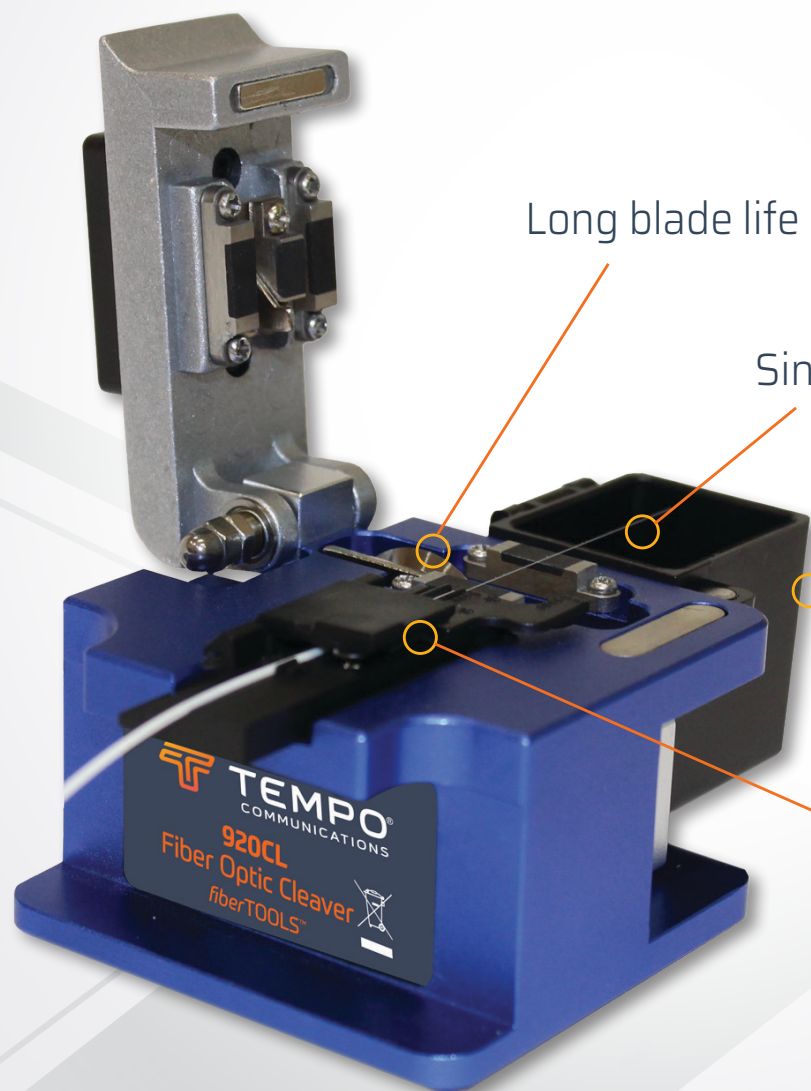

Long blade life

Singlemode and multimode fibers

Dust bin safely
collects end cuts

Cleave 250 micron,
900 micron, 3mm and
Bowtie fibers



TEMPO
COMMUNICATIONS

Renewed Vision. Innovation Forward.

1.800.561.8187

www.**itm**.com

information@itm.com

920CL

Fiber Optic Cleaver

BENEFITS:

- **Accurate Cleave.** Cleave multi-mode and single-mode fiber optic cables.
- **Long Life.** Blades rotate for longer life - over 48,000 cleaves.
- **Adaptable.** Supports 250 micron, 900 micron, 3mm and Bowtie fibers.
- **Dust bin.** Safely collects end cuts during cleaving process.
- **Fixed Clamp.** For use as a standalone cleaver.



SPECIFICATIONS:

920CL	Fiber Type:	SM (G.652); MM (G.651); DS (G.653); NZDS (G.655); BIF (G.657)
	Fiber Cleave Length:	5mm - 20mm
	Cladding Diameter:	125µm
	Coating Diameter:	0.25mm and 0.9mm
	Fiber Count:	Single
	Cleaving Angle:	< 0.5°
	Blade Life:	48,000 Cleaves
	Weight:	0.68lbs (310g)
	Dimensions:	2.13 x 2.28 x 2.28" (54 x 58 x 58 mm)

*Specifications subject to change without notice.

ORDERING INFORMATION:

CAT. NO.	DESCRIPTION
920CL	Fiber Optic Cleaver
920CL CLVR Case	Cleaver Case
01640	Cleaving Wheel
FC920G200	Fixed Clamp 920CL & FCL200 With Screw
04268	Replacement Screw for Fixed Clamp

CONTENTS:

- 920CL Cleaver with Fixed Clamp installed
- 2.5mm Allen Key
- Instruction Sheet
- Hard Carry Case

TC6714 03/23



Renewed Vision. Innovation Forward.