



Advanced Tools Smart Solutions




4" Valve
(100 mm)


5" Valve
(125 mm)

6" Valve
(150 mm)


Convenient Room Airflow Calculator



Select Room
Airflow Calculator



Enter Room Type, number of walls with exterior windows or doors, room dimensions and then touch calculate

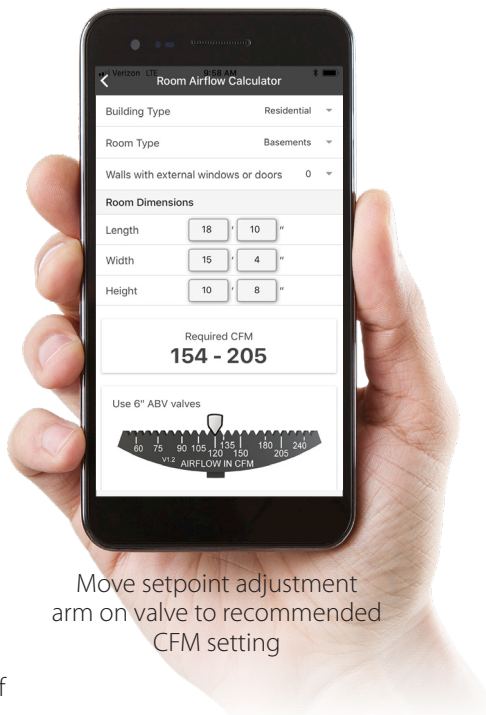

Move setpoint adjustment
arm on valve to recommended
CFM setting

ABMHBK & ABMHBV SERIES Home Balancing Valves

Traditional airflow balancing devices cannot respond to system changes. Too much ventilation means wasted energy, while too little ventilation leads to poor air quality.

CPS Home Balancing Valves are designed to maintain a constant, accurate airflow volume when installed in residential forced air ductwork.

Each Home Balancing Valve has an engineered damper calibrated to automatically adjust to varying pressures, which gives the airflow valves true pressure independence. This leads to greater comfort, saves energy and improves indoor air quality.

FEATURES

- Eliminates hot/cold areas in your home
- Provides greater comfort
- Reduces energy use
- Improves indoor air quality
- Easy to set airflow volumes
- Available in single or 10 pack kit

APPLICATIONS


- Precise airflow regulation in forced air ventilation systems in residential homes
- Automatic balancing of supply grilles in residential forced air heating and cooling systems
- Any HVAC application with a static pressure between 0.2 and 2.0 inches w.c.
- For temperatures ranging from 25° to 150°F (-4° to 65°C)

Connect with us on social media



CPS reserves the right to make changes to, or discontinue any product or service identified in this publication without notice. CPS advises its customers to ensure they have obtained the latest and most current version of

Home Balancing Valves constrain airflow to precise factory calibrated volumes as marked on the front of the valve.

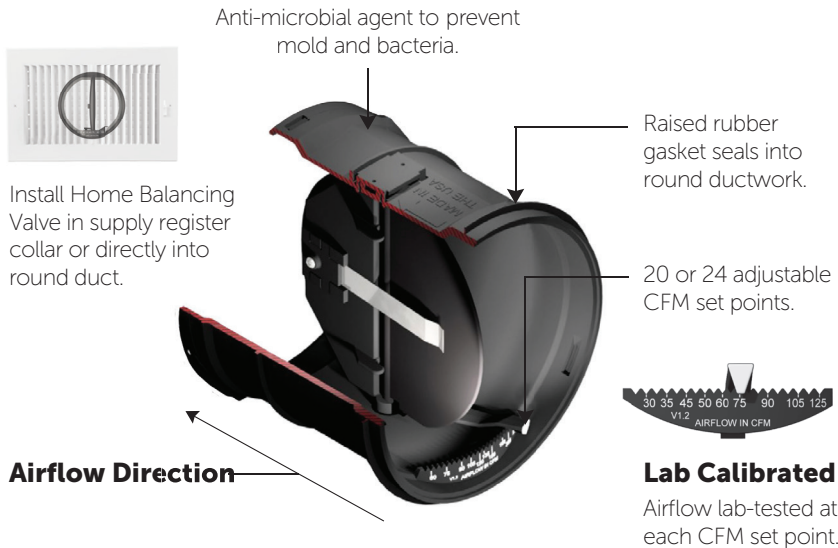

10 Pack Boxes



ABMHBK410
Home Balancing Valve Kit
(4" Balancing Valves)
10 valves per box

ABMHBK510
Home Balancing Valve Kit
(5" Balancing Valves)
10 valves per box

ABMHBK610
Home Balancing Valve Kit
(6" Balancing Valves)
10 valves per box

Single Pack Boxes



ABMHBV4
Home Balancing Valve
(4" Balancing Valves)
1 valve per box

ABMHBV5
Home Balancing Valve
(5" Balancing Valves)
1 valve per box

ABMHBV6
Home Balancing Valve
(6" Balancing Valves)
1 valve per box

Specifications

	4" Valve	5" Valve	6" Valve
Outside Diameter (Rubber Gasket)	3.8" (97mm)	4.8" (122mm)	5.7" (149 mm)
Height	3.5" (88mm)	3.8" (122mm)	5.2" (134mm)
Weight (One Valve)	.203 Lb (90g)	.437 lb (200g)	.609 Lb (280g)
Number of Unique Set Points (CFM)	20	20	24
Airflow Range (CFM)	25-130 CFM	25-130 CFM	50-275 CFM
Airflow Lab Tested at Each Set Point	Yes		
Airflow Accuracy Range	±10% within 0.2" to 1.0		
Temperature Range (Suitable Applications)	25F to 150F (-4C to 65C)		
Static Pressure Range	0.2 to 2.0 Inches w.c.		
Rubber Gasket (Insertion Into Round Duct)	Reversible - Use on either end		
Blade Damper for Quiet Operation	Yes		
Anti-Microbial	Yes		
UL Tested & Classified	UL 2043		
Warranty	1 Year		

	Product	L x W x H	Weight	Qty	Bar Code
10 Pack	ABMHBK410	12" x 7.75" x 8" 30.5 x 19.7 x 21.9 cm	2.70 Lb 1.22 kg	10	750377116759
	ABMHBK510	15.37" x 9.75" x 8.62" 39.0 x 24.8 x 21.9 cm	5.37 Lb 2.43 kg	10	750377116766
	ABMHBK610	15.37" x 9.75" x 8.62" 39.0 x 24.8 x 21.9 cm	7.75 Lb 3.51 kg	10	750377116773
Single Pack	ABMHBV4	4.3" x 4.3" x 3.6" 11 x 11 x 9 cm	.28 Lb .127 kg	1	750377116780
	ABMHBV5	5" x 5" x 4" 13 X 13 X 10 cm	.53 Lb 24.0 kg	1	750377116797
	ABMHBV6	6.3" x 6.3" x 5.3"	.78 Lb	1	750377116803

Download App Now



CPSLink
(US Patent # 1,043,161)



Version 4.3 or higher