


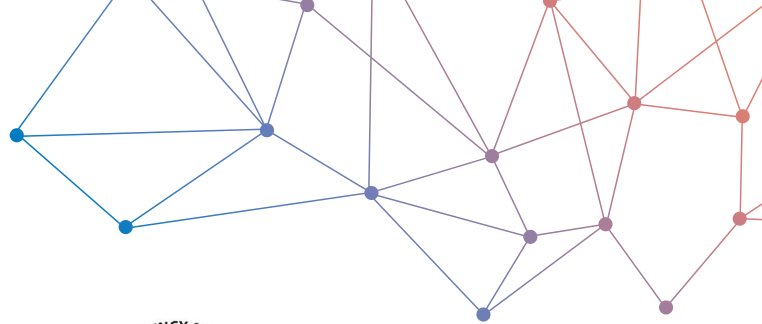

BTU1500-NP

Residential & Commercial Combustion Analyzer The Latest in Combustion Analysis Technology

Accurate / Reliable / Robust / Fast

- 6 Tools-In-One
- Draft & Differential Pressure
- Flue and Ambient Temp
- Ambient CO Monitor
- Built-In Manometer
- Combustion Efficiency
- PC Software w/ Auto Saving
- Unbreakable Metal Connections



O₂, CO, CO₂



Field Replaceable Sensors



Auto-Zero in the Flue



Automatic, True High-Efficiency
Calculations for All Condensing
Systems



Full Color Graphic Display



iOS and Android Mobile Applications

E Instruments International
www.e-inst.com

P: 1+215-750-1212 - F: 1+215-750-1399
850 Town Center Drive, Langhorne, PA, USA, 19047

1.800.561.8187

www.itm.com

information@itm.com



BTU1500-NP Features

- 1 Simple Menu Interface with Full Color Graphic Display
- 2 Magnetic Rubber Holster
- 3 Unbreakable Metal Connections

Pre-Calibrated Field Replaceable Sensors

Automatic Outdoor Air Temp. & High-Efficiency Calculations (Condensing Systems)

PC Software, Bluetooth® & App Included

Parameter	Sensor	Range	Resolution	Accuracy
O ₂	Electrochemical	0 - 25 %	0.1 %	±0.2 % vol
CO H ₂ compensated w/ built-in NOx filter	Electrochemical	0 - 8000 ppm	1 ppm	±8 ppm <400 ppm ±5 % rdg up to 2000 ppm ±10 % rdg for >2000 ppm
CO ₂	Calculated	0 - 99.9 %	0.1 %	-
Tair	Pt100	-4 to 248 °F -20 to 120 °C	0.1 °F 0.1 °C	±1 °F ±1 °C
Tgas	Tc K	-4 to 2280 °F -20 to 1250 °C	0.1 °F 0.1 °C	±2 °F ±2 °C
Differential temperature	Calculated	-4 to 2280 °F -20 to 1250 °C	0.1 °F 0.1 °C	-
Pressure/Draft	Semiconductor	-4 to 80 inH ₂ O -10 to 200 mbar	0.001 inH ₂ O 0.01 mbar	±1 % rdg.
Excess air	Calculated	0 - 850 %	1 %	-
Efficiency	Calculated	0 - 100 %	0.1 %	-
Warranty	2 years: analyzer + sensors			

Ordering Information

Model #	Description
1500-NP	BTU1500 Base Kit = Analyzer w/ O ₂ , CO, CO ₂ , Efficiency, Excess Air, Draft, Pressure, Temp, Rechargeable Battery & AC Plug, 12" (300mm) Probe with 10' (3m) Dual hose, Vinyl Case, Calibration Certificate, Operating Manual, Cheat Sheet, Water Trap, Paper Roll, 2000 Internal Data Storage, PC Software, Bluetooth™ Connectivity, Automatic Outdoor Air Temperature Saving for ALL 90%+ Systems & Condensing Systems for TRUE Efficiency Calculations + New iOS and Android App Included
1500-NP-O	Standard 1500-1 Kit PLUS: Oil Smoke Pump, Smoke Filter Papers, and Comparison Chart
1500-NP-P	Standard 1500-1 Kit PLUS: Differential Pressure Manometer Kit (2 Hoses)

Standard Probe Details:

- 12" (300mm) probe
- 1470 °F (800 °C) max
- 10' (3m) Dual Hose
- Longer & High Temperature Probes available

All BTU1500 Kits Include:

- New iOS & Android App
- New Auto Outdoor Air Temp.
- O₂, CO, CO₂
- Combustion Efficiency, Losses, Excess Air
- CO Air Free
- Draft & Differential Pressure
- Temperature Measurements
- Large Color Display
- 2000 Test Internal Memory
- Bluetooth Connectivity
- Long Lasting Rechargeable Battery & AC Charger
- Gas Sampling Probe & Hose
- Water Trap with Filter Cartridge
- Magnetic Rubber Holster
- PC Software & USB Cable
- Operating Manual
- Calibration Certificate
- Carrying Case



E Instruments International
www.e-inst.com

P: 1+215-750-1212 - F: 1+215-750-1399
 850 Town Center Drive, Langhorne, PA, USA, 19047

1.800.561.8187

www.itm.com

information@itm.com