



## Description & Features:

- Excellent flow regulation and leak tight
- The one-piece body construction (no welding) provides strength, safety and corrosion resistance
- "Slow opening" prevents sudden pressure surge and instrument damage
- Materials include carbon steel, carbon steel NACE, stainless steel, stainless steel NACE
- Available in Hard Seat (6,000 and 10,000 psi)
- ASME B1.20.1 compliant
- CRN registered
- 5 year warranty

## Applications:

- Highly reliable throttle and block valve for gas or liquid service in severe duty oil and gas installations including refineries and processing plants as well as water treatment plants, power plants and hydraulic applications

## Order Codes (products in bold are normally stock in North America)

NPT Connection	Material	Max. Pressure	Code	NPT Connection	Material	Max. Pressure	Code
1/4" Female x 1/4" Female	Carbon Steel	6,000 psi	<b>NVA5020</b>	1/4" Female x 1/4" Female	Carbon Steel (NACE Tip)	6,000 psi	NVA5020N
		10,000 psi	<b>NVA6020</b>			10,000 psi	NVA6020N
1/4" Male x 1/4" Female		6,000 psi	<b>NVA5000</b>	1/4" Male x 1/4" Female		6,000 psi	NVA5000N
		10,000 psi	<b>NVA6000</b>			10,000 psi	NVA6000N
3/8" Female x 3/8" Female		6,000 psi	<b>NVA5024</b>	3/8" Female x 3/8" Female		6,000 psi	NVA5024N
		10,000 psi	<b>NVA6024</b>			10,000 psi	NVA6024N
3/8" Male x 3/8" Female		6,000 psi	<b>NVA5004</b>	3/8" Male x 3/8" Female		6,000 psi	NVA5004N
		10,000 psi	<b>NVA6004</b>			10,000 psi	NVA6004N
1/2" Female x 1/2" Female		6,000 psi	<b>NVA5021</b>	1/2" Female x 1/2" Female		6,000 psi	NVA5021N
		10,000 psi	<b>NVA6021</b>			10,000 psi	NVA6021N
1/2" Male x 1/2" Female		6,000 psi	<b>NVA5001</b>	1/2" Male x 1/2" Female		6,000 psi	NVA5001N
		10,000 psi	<b>NVA6001</b>			10,000 psi	NVA6001N
3/4" Female x 1/2" Female		6,000 psi	<b>NVA5022</b>	3/4" Female x 1/2" Female		6,000 psi	NVA5022N
		10,000 psi	<b>NVA6022</b>			10,000 psi	NVA6022N
3/4" Male x 1/2" Female		6,000 psi	<b>NVA5002</b>	3/4" Male x 1/2" Female		6,000 psi	NVA5002N
		10,000 psi	<b>NVA6002</b>			10,000 psi	NVA6002N
3/4" Female x 3/4" Female		6,000 psi	<b>NVA5025</b>	3/4" Female x 3/4" Female		6,000 psi	NVA5025N
		10,000 psi	<b>NVA6025</b>			10,000 psi	NVA6025N
3/4" Male x 3/4" Female		6,000 psi	<b>NVA5005</b>	3/4" Male x 3/4" Female		6,000 psi	NVA5005N
		10,000 psi	<b>NVA6005</b>			10,000 psi	NVA6005N
1" Female x 1" Female		6,000 psi	<b>NVA5023</b>	1" Female x 1" Female		6,000 psi	NVA5023N
		10,000 psi	<b>NVA6023</b>			10,000 psi	NVA6023N
1" Male x 1" Female		6,000 psi	<b>NVA5003</b>	1" Male x 1" Female		6,000 psi	NVA5003N
		10,000 psi	<b>NVA6003</b>			10,000 psi	NVA6003N
1/4" Female x 1/4" Female	Stainless Steel	6,000 psi	<b>NVA2020</b>	1/4" Female x 1/4" Female	Stainless Steel NACE	6,000 psi	NVA2020N
		10,000 psi	<b>NVA3020</b>			10,000 psi	NVA3020N
1/4" Male x 1/4" Female		6,000 psi	<b>NVA2000</b>	1/4" Male x 1/4" Female		6,000 psi	NVA2000N
		10,000 psi	<b>NVA3000</b>			10,000 psi	NVA3000N
3/8" Female x 3/8" Female		6,000 psi	<b>NVA2024</b>	3/8" Female x 3/8" Female		6,000 psi	NVA2024N
		10,000 psi	<b>NVA3024</b>			10,000 psi	NVA3024N
3/8" Male x 3/8" Female		6,000 psi	<b>NVA2004</b>	3/8" Male x 3/8" Female		6,000 psi	NVA2004N
		10,000 psi	<b>NVA3004</b>			10,000 psi	NVA3004N
1/2" Female x 1/2" Female		6,000 psi	<b>NVA2021</b>	1/2" Female x 1/2" Female		6,000 psi	NVA2021N
		10,000 psi	<b>NVA3021</b>			10,000 psi	NVA3021N
1/2" Male x 1/2" Female		6,000 psi	<b>NVA2001</b>	1/2" Male x 1/2" Female		6,000 psi	NVA2001N
		10,000 psi	<b>NVA3001</b>			10,000 psi	<b>NVA3001N</b>
3/4" Female x 1/2" Female		6,000 psi	<b>NVA2022</b>	3/4" Female x 1/2" Female		6,000 psi	NVA2022N
		10,000 psi	<b>NVA3022</b>			10,000 psi	NVA3022N
3/4" Male x 1/2" Female		6,000 psi	<b>NVA2002</b>	3/4" Male x 1/2" Female		6,000 psi	NVA2002N
		10,000 psi	<b>NVA3002</b>			10,000 psi	NVA3002N
3/4" Female x 3/4" Female		6,000 psi	<b>NVA2025</b>	3/4" Female x 3/4" Female		6,000 psi	NVA2025N
		10,000 psi	<b>NVA3025</b>			10,000 psi	NVA3025N
3/4" Male x 3/4" Female		6,000 psi	<b>NVA2005</b>	3/4" Male x 3/4" Female		6,000 psi	NVA2005N
		10,000 psi	<b>NVA3005</b>			10,000 psi	NVA3005N
1" Female x 1" Female		6,000 psi	<b>NVA2023</b>	1" Female x 1" Female		6,000 psi	NVA2023N
		10,000 psi	<b>NVA3023</b>			10,000 psi	NVA3023N
1" Male x 1" Female		6,000 psi	<b>NVA2003</b>	1" Male x 1" Female		6,000 psi	NVA2003N
		10,000 psi	<b>NVA3003</b>			10,000 psi	NVA3003N

### Option suffix:


CPM = Carbon steel panel mount kit

SPM = Stainless steel panel mount kit


## Material

Description	Component Number	Carbon Steel	Carbon Steel NACE	Stainless Steel	Stainless Steel NACE
Body	1	Carbon Steel	Carbon Steel	316 SS	316 SS NACE
Bonnet	2	Carbon Steel	Carbon Steel	316 SS	316 SS NACE
Adapter Locknut	3	Carbon Steel	Carbon Steel	304 SS	304 SS
Adapter	4	316 SS	316 SS NACE	316 SS	316 SS NACE
Dustcap	5	Nylon	Nylon	Nylon	Nylon
Handle	6	Carbon Steel	Carbon Steel	304 SS	304 SS
Screw	7	304 SS	304 SS	304 SS	304 SS
Fastening Screw	8	304 SS	304 SS	304 SS	304 SS
Needle / Needle Tip	9	316 SS	316 SS NACE	316 SS	316 SS NACE
Gland Washer	10	Carbon Steel	Carbon Steel	304 SS	304 SS
Gland Packing	11	PTFE/Graphite	PTFE/Graphite	PTFE/Graphite	PTFE/Graphite
Dwell Pin	12	Carbon Steel	Carbon Steel	304 SS	304 SS
Gland Packing	13	PTFE/Graphite	PTFE/Graphite	PTFE/Graphite	PTFE/Graphite

## Female x Female

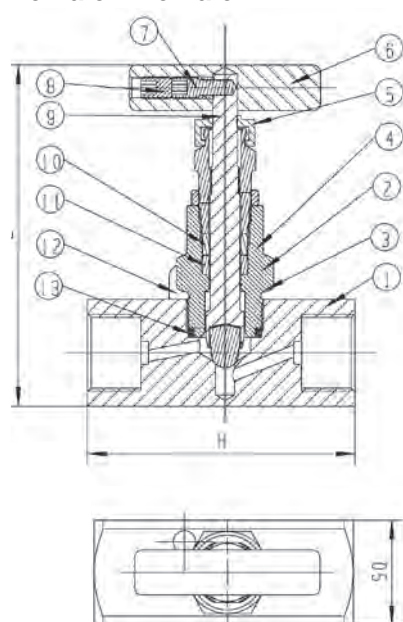

## Male x Female

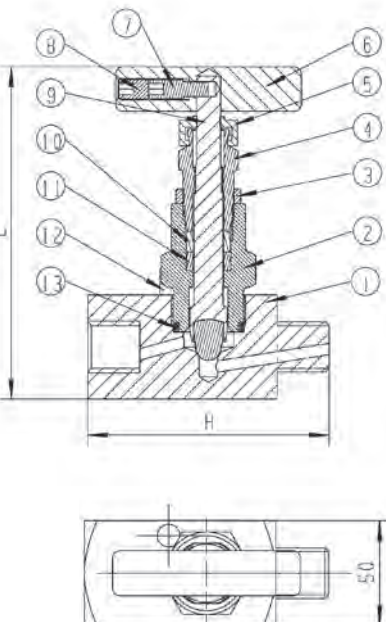

## Dimensions

Size	H	L	SQ
1/4" Female x 1/4" Female	2.56" (65mm)	3.50" (89mm)	1.10" (28mm)
1/4" Male x 1/4" Female	2.56" (65mm)	3.50" (89mm)	1.10" (28mm)
3/8" Female x 3/8" Female	2.56" (65mm)	3.50" (89mm)	1.10" (28mm)
3/8" Male x 3/8" Female	2.56" (65mm)	3.50" (89mm)	1.10" (28mm)
1/2" Female x 1/2" Female	2.76" (70mm)	3.50" (89mm)	1.10" (28mm)
1/2" Male x 1/2" Female	2.76" (70mm)	3.50" (89mm)	1.10" (28mm)
3/4" Female x 1/2" Female	2.83" (72mm)	3.66" (93mm)	1.26" (32mm)
3/4" Male x 1/2" Female	2.83" (72mm)	3.50" (89mm)	1.10" (28mm)
3/4" Female x 3/4" Female	2.83" (72mm)	3.66" (93mm)	1.26" (32mm)
3/4" Male x 3/4" Female	2.83" (72mm)	3.66" (93mm)	1.26" (32mm)
1" Female x 1" Female	3.23" (82mm)	3.98" (101mm)	1.58" (40mm)
1" Male x 1" Female	3.23" (82mm)	3.98" (101mm)	1.58" (40mm)

## Panel Mont Kit (CPM/SPM)

